Vietnam General Confederation of Labor

**Ton Duc Thang University**

**Faculty of Information Technology**




**Dinh Quoc Cuong – 523H0008**

**Vo Huynh Minh Duc – 523H0014**

# Building a Video Sharing Platform with an Automated HLS Transcoding Pipeline on a Serverless Container and Event-Driven Architecture

INFORMATION TECHNOLOGY PROJECT

**DEVOPS, CONTAINERIZATION & CLOUD SYSTEMS**

Supervisor

**MSc. Mai Van Manh**

**Ho Chi Minh City, 2026**

# Acknowledgment

First and foremost, we would like to express our sincere gratitude to our supervisor, **MSc. Mai Van Manh**, for his invaluable guidance, constructive feedback, and continuous encouragement throughout the duration of this project. His expertise, patience, and dedication have played a crucial role in shaping both the technical direction and the academic rigour of this work.

We are also deeply thankful to the lecturers and staff of the Faculty of Information Technology at Ton Duc Thang University, whose support and resources provided a strong foundation for our work. Their commitment to creating an inspiring and intellectually stimulating environment has greatly contributed to our growth.

Our gratitude further extends to our classmates and friends who offered helpful discussions, motivation, and meaningful insights during the development and evaluation of this project. Their companionship made the challenging moments far more manageable.

Finally, we are profoundly grateful to our families for their unconditional support, patience, and encouragement. Their belief in us has always been our greatest source of strength and determination.

To all of you, we extend our heartfelt thanks.

# Certification

This thesis was carried out at **Ton Duc Thang University**.

**Advisor: MSc. Mai Van Manh**

.....
*(Title, Full Name and Signature)*

This thesis was defended at the Undergraduate Thesis Examination Committee held at Ton Duc Thang University on . . . . . / . . . . . / . . . . . .

Confirmation of the Chairman of the Undergraduate Thesis Examination Committee and the Dean of the Faculty after receiving the revised thesis (if any).

**CHAIRMAN** **DEAN OF FACULTY**

. . . . . .

# Declaration

This thesis was completed at **Ton Duc Thang University**. We hereby declare that this is our own research work, conducted under the academic supervision of **MSc. Mai Van Manh**. All analyses, discussions, and results presented in this thesis are truthful, original, and have not been published in any form prior to this submission.

All data used for analysis, evaluation, and comparison were collected directly by the author(s) from various reliable sources, which are fully cited in the reference section of this thesis. In addition, certain evaluations, comments, and figures quoted from other authors, organizations, or research works are clearly referenced and properly acknowledged.

If any form of academic dishonesty, plagiarism, or copyright infringement is discovered, we accept full responsibility for the content of this thesis. Ton Duc Thang University shall bear no liability for any copyright or authorship violations committed by the author(s) during the execution of this research.

Ho Chi Minh City, day month year

**Author(s)**

*(Signature and full name)*

# Abstract

Modern video sharing platforms must solve a common core problem: when a user uploads a source file in an arbitrary format, codec, or resolution, the system has to transcode it automatically into HTTP Live Streaming (HLS) so that browsers can play it with adaptive quality. Provisioning a dedicated server cluster or a Kubernetes system that runs continuously purely to wait for transcoding work is wasteful, because upload traffic is inherently bursty and the infrastructure sits idle most of the time. Conversely, when many users upload simultaneously, the system must scale out to process hundreds of videos in parallel.

This project presents the design, implementation, and evaluation of a complete video sharing platform whose transcoding subsystem is built on a Serverless Container and Event-Driven architecture. Uploading a file to Amazon S3 emits an event that is buffered in Amazon SQS and dispatched by an AWS Lambda job submitter to AWS Batch running on AWS Fargate. A container packaging FFmpeg is created only when there is work to do, produces up to six renditions from 144p to 1080p together with a master playlist and a thumbnail, uploads the result to a processed bucket, updates the metadata in MongoDB Atlas, and then terminates. Videos of five minutes or more are encoded as parallel chunks, and four hours of video was ready in 135 minutes at 8 vCPU. Content is delivered through Amazon CloudFront with Origin Access Control, and every stream is gated at the edge by CloudFront Signed Cookies, so that a viewer without a valid signature is rejected even when they know the exact manifest URL; a video's visibility setting governs who the backend will issue those cookies to, not whether the gate applies. Content is screened automatically and reviewed in a console that records each decision.

The entire AWS infrastructure is described as code using thirteen independent Terraform modules and can be provisioned with a single command. Seven GitHub Actions workflows automate linting, unit testing, static security analysis, container image scanning, infrastructure validation, and deployment, with a two-tier quality gate that blocks a pull request whenever a fixable critical vulnerability is detected.

The system is evaluated along four dimensions: quality of experience, measured

both as Time-to-First-Frame and, by driving the deployed player in a headless browser under emulated network conditions, as rebuffering ratio, bitrate switching and the bitrate a viewer actually receives; transcoding pipeline latency across 100 MB, 500 MB, and 1 GB inputs, scalability under a concurrent upload stress test, and operating cost compared against a traditional always-on Amazon EC2 deployment. The cost analysis shows that, for the architecture-dependent portion of the bill, the serverless approach removes almost all idle resource waste, although this advantage narrows as sustained utilisation increases.

# List of Abbreviations

| | |
|---|---|
| **ABR** | Adaptive Bitrate Streaming |
| **ACM** | AWS Certificate Manager |
| **API** | Application Programming Interface |
| **ARN** | Amazon Resource Name |
| **AWS** | Amazon Web Services |
| **CDN** | Content Delivery Network |
| **CI/CD** | Continuous Integration / Continuous Deployment |
| **CORS** | Cross-Origin Resource Sharing |
| **CPU** | Central Processing Unit |
| **DLQ** | Dead Letter Queue |
| **DNS** | Domain Name System |
| **DRM** | Digital Rights Management |
| **EBS** | Amazon Elastic Block Store |
| **ECR** | Amazon Elastic Container Registry |
| **ECS** | Amazon Elastic Container Service |
| **ERD** | Entity Relationship Diagram |
| **FinOps** | Cloud Financial Operations |
| **FR** | Functional Requirement |
| **GPU** | Graphics Processing Unit |
| **HEVC** | High Efficiency Video Coding |
| **HLS** | HTTP Live Streaming |
| **IaC** | Infrastructure as Code |
| **IAM** | AWS Identity and Access Management |
| **JWT** | JSON Web Token |
| **MIME** | Multipurpose Internet Mail Extensions |
| **NFR** | Non-Functional Requirement |
| **OAC** | Origin Access Control |

| | |
|---|---|
| **QoE** | Quality of Experience |
| **SAST** | Static Application Security Testing |
| **SCA** | Software Composition Analysis |
| **SPA** | Single Page Application |
| **SQS** | Amazon Simple Queue Service |
| **S3** | Amazon Simple Storage Service |
| **TLS** | Transport Layer Security |
| **TTFF** | Time-to-First-Frame |
| **TTL** | Time To Live |
| **UC** | Use Case |
| **vCPU** | Virtual Central Processing Unit |
| **VMAF** | Video Multi-Method Assessment Fusion |
| **VOD** | Video on Demand |
| **VPC** | Amazon Virtual Private Cloud |

# Contents

**Acknowledgment** **i**

**Certification** **ii**

**Declaration** **iii**

**Abstract** **iv**

**List of Abbreviations** **vi**

**1 Introduction** **1**

1.1 Background and Rationale . . . . . 1

1.2 Project Objectives . . . . . 2

1.3 Scope and Deliverables . . . . . 2

1.4 Research Methodology . . . . . 3

1.5 Practical Significance . . . . . 4

1.6 Main Contributions . . . . . 4

1.7 Structure of the Report . . . . . 5

**2 Literature Review and Technologies** **6**

2.1 Related Platforms and Comparison . . . . . 6

2.2 Core Models and Principles . . . . . 8

2.2.1 Serverless Containers . . . . . 8

2.2.2 Event-Driven Architecture . . . . . 10

2.2.3 Adaptive Bitrate Streaming and the Bitrate Ladder . . . . . 10

2.3 Technology Stack Justification . . . . . 12

**3 Requirements Analysis** **13**

3.1 Stakeholders and User Requirements . . . . . 13

3.2 Functional Requirements . . . . . 13

3.3 Non-Functional Requirements . . . 15
3.4 Use Case Model . . . 16

**4 System Design** **20**
4.1 High-Level Architecture . . . 20
4.2 Transcoding Pipeline Design . . . 20
4.2.1 Upload of Large Files . . . 24
4.2.2 Chunk-Parallel Transcoding of Long Videos . . . 24
4.3 Database Design . . . 25
4.4 Content Protection Design . . . 29
4.5 Content Moderation and Operations Design . . . 30
4.5.1 Automatic Screening . . . 31
4.5.2 Moderation States and Visibility . . . 32
4.5.3 Review, Appeals and Audit . . . 32
4.5.4 Measuring the Screening . . . 33
4.5.5 Roles and Permissions . . . 34
4.5.6 Verifying the Owner of an Account . . . 34
4.6 Interface Design . . . 35

**5 Development and Testing** **39**
5.1 Backend Implementation . . . 39
5.2 Transcoder Implementation . . . 41
5.3 Infrastructure as Code . . . 43
5.4 CI/CD Pipeline and DevSecOps . . . 45
5.5 Challenges During Development . . . 47
5.5.1 Provisioning Blocked by Account Policy . . . 47
5.5.2 A Signed Cookie Policy That Matched Nothing . . . 48
5.5.3 Two Consequences of Gating Every Object . . . 48
5.5.4 Playback Across the Cookie Expiry Boundary . . . 48
5.5.5 An Empty Secret That Stopped the Pipeline . . . 49
5.5.6 Retry and Alerting on the Deployed Path . . . 49
5.5.7 Monitoring the Service Rather Than the Server . . . 50
5.5.8 Infrastructure Drift in the Instance Definition . . . 50
5.6 Testing . . . 51

**6 Deployment and Evaluation** **55**
6.1 The Deployed Environment . . . 55

6.2 User Interface Showcase . . . 56
6.3 Quality of Experience Evaluation . . . 60
6.3.1 Measuring the Deployed CDN, and a Configuration That Inverted It 61
6.3.2 Delivery Latency by Client Location . . . 63
6.3.3 Playback Under Constrained Bandwidth, and a Manifest That Understated Itself . . . 65
6.3.4 Whether Content Complexity Governs the Result . . . 68
6.4 Transcoding Pipeline Performance . . . 72
6.5 Chunked Transcoding of Long Videos . . . 74
6.6 Load Testing . . . 80
6.6.1 Cross-Validation with an Independent Tool . . . 81
6.6.2 Validating Real Transcoding Throughput . . . 83
6.6.3 Drain Rate Under Real Transcoding Load . . . 83
6.7 Cost Analysis . . . 84

**7 Conclusion and Future Work** **87**
7.1 Summary of Achievements . . . 87
7.2 Strengths of the System . . . 88
7.3 Limitations . . . 89
7.4 Future Work . . . 92

**A Supplementary Material** **97**
A.1 Repository Structure . . . 97
A.2 FFmpeg Transcoding Command . . . 97
A.3 Signed Cookie Custom Policy . . . 99
A.4 Reproducing the Measurements . . . 100
A.5 Deploying the Infrastructure . . . 101

**B Measurement Tables** **103**
B.1 Time-to-First-Frame . . . 103
B.2 Playback Quality . . . 105
B.3 Transcoding Latency and Capacity . . . 105

# List of Figures


2.1 *Compute models for a bursty transcoding workload: an always-on cluster compared with on-demand serverless containers* . . . . . 9
2.2 *HLS artefacts produced from one source file and the order in which a player retrieves them* . . . . . 11

3.1 *Use case diagram of the video sharing platform* . . . . . 17
3.2 *Use case diagram of moderation and operation* . . . . . 18

4.1 *Overall system architecture, showing the deployment boundaries and the numbered data flow from an anonymous visit through upload, transcoding and signed delivery; the key at the lower left names each step* . . . . 21
4.2 *Sequence diagram of the event-driven transcoding pipeline for one container; a video of five minutes or more takes the chunked path of Table 4.1* 22
4.3 *Entity relationship diagram of the core MongoDB collections* . . . . . 26
4.4 *Entity relationship diagram of the collections that support moderation and operation; every video field refers to* `Video` *and every user field to* `User` . . . . . 28
4.5 *User flow through the application, from an anonymous visit to a published video* . . . . . 37

5.1 *The seven GitHub Actions workflows, the file paths that trigger each of them, and the two-tier DevSecOps quality gate* . . . . . 46

6.1 *Catalogue page, the entry point for a visitor* . . . . . 56
6.2 *Watch page with custom player, rendition selector and related videos sidebar* . . . . . 57
6.3 *Upload page, showing direct-to-storage transfer with live telemetry* . . . 58
6.4 *Channel management view, including videos still being processed* . . . 58
6.5 *Operations console, Removed tab, with the labels the machine detected and who removed each video* . . . . . 59

6.6 *Operations console, Accuracy tab, each rate shown with its interval and sample size* . . . . . 60
6.7 *Median time to first frame in three delivery configurations, and the median of each stage where it was measured* . . . . . 62
6.8 *Median time to first frame by client location, before and after* `PriceClass_All` . . . . . 63
6.9 *Rebuffering ratio and average bitrate for three sources of differing visual complexity under three network profiles* . . . . . 70
6.10 *A 25-minute video on the chunked path: time to READY and compute by chunk configuration and capacity* . . . . . 76
6.11 *A four-hour video: time from the end of the upload to READY, by step, at 16 and at 8 vCPU* . . . . . 77
6.12 *Four 25-minute videos submitted together: when each waited, encoded and finalised, at 8 and at 16 vCPU* . . . . . 78

# List of Tables


2.1 Comparison of transcoding approaches across platforms . . . . . 7

3.1 Functional requirements of the system . . . . . 14
3.2 Functional requirements of moderation and operation . . . . . 15
3.3 Non-functional requirements of the system . . . . . 16
3.4 Use case specification: upload a video . . . . . 19

4.1 Jobs of the chunked path . . . . . 25
4.2 Collections that support moderation and operation . . . . . 27
4.3 Actions assigned to Rekognition labels by the screening policy . . . . . 31
4.4 Outcome class of a human decision, given the machine's conclusion . . 33
4.5 Permissions of the four roles . . . . . 34

5.1 Terraform modules and their responsibilities . . . . . 44
5.2 Automated backend tests by area, 492 tests in 35 suites . . . . . 52
5.3 Automated transcoder tests by area, 361 tests in 17 suites . . . . . 53

6.1 Playback quality by emulated network profile . . . . . 66
6.2 Declared against actual bitrate for each rendition . . . . . 66
6.3 Playback quality before and after the manifest correction . . . . . 67
6.4 Unthrottled playback at device pixel ratio one against two . . . . . 71
6.5 Transcoding pipeline latency by input size . . . . . 73
6.6 Single-container path against chunked path for videos of five to fifteen minutes . . . . . 76
6.7 Simultaneous submissions at 16 vCPU . . . . . 79
6.8 Concurrent upload stress test results (API layer) . . . . . 81
6.9 Cross-validation of the load test across two independent tools . . . . . 81
6.10 Backlog drain under synthetic and real payloads . . . . . 84
6.11 Monthly operating cost comparison for the part of the bill that the architecture controls (ap-southeast-1) . . . . . 85

A.1 Provenance of each measurement table . . . . . 101

B.1 Time-to-First-Frame measurement results . . . . . 103
B.2 Time-to-First-Frame through CloudFront after the price class correction 104
B.3 Time-to-First-Frame by client location, before and after `PriceClass_All` 104
B.4 Playback quality across three sources of differing visual complexity . . 105
B.5 A 25-minute video on the chunked path, by chunk configuration and capacity . . . . . 106
B.6 A four-hour video at two capacities . . . . . 106
B.7 Four 25-minute videos submitted together, by capacity . . . . . 107

# Chapter 1

# Introduction

## 1.1 Background and Rationale

Video has become the dominant form of content on the Internet, and platforms such as YouTube, Vimeo, and TikTok have made uploading and sharing video an everyday activity. Behind that apparent simplicity lies a demanding engineering problem. When a user uploads a source file, that file may use any container format, any codec, and any resolution, yet the platform must deliver a stream that plays smoothly on every device and adapts to whatever bandwidth the viewer happens to have at that moment.

The industry solution to this problem is HTTP Live Streaming (HLS), a protocol that splits a video into short segments, typically between two and ten seconds long, and produces several quality renditions of the same content. A playlist file written in the `.m3u8` format enumerates the available renditions, and the player selects among them in real time according to measured network throughput. This mechanism, known as Adaptive Bitrate Streaming (ABR), is what allows playback to degrade gracefully rather than stall when a connection weakens.

Producing those renditions is computationally expensive, and this is where the architectural difficulty arises. Transcoding is a bursty workload: it consumes a large amount of CPU while a video is being processed and nothing at all when no one is uploading. A platform that keeps a dedicated server cluster or a Kubernetes system running continuously simply to wait for work therefore pays for a substantial amount of idle capacity. The alternative failure mode is equally undesirable: a system provisioned only for the average case cannot absorb a sudden burst when many users upload at the same time, and uploads either queue for a long time or are dropped altogether.

This tension between idle cost and burst capacity motivates the present project. Rather than maintaining permanently allocated compute, the system proposed here starts

a container only when there is a video to process and destroys it immediately afterwards, so that cost accrues only for the seconds during which transcoding actually runs.

## 1.2 Project Objectives

The project aims to build a complete video sharing platform for end users, together with the automated transcoding subsystem that supports it. Specifically, the objectives are:

1. To build a web platform that allows users to register an account, upload videos, watch them at multiple quality levels, and share them through public, unlisted or private links.

2. To automate the entire processing pipeline, from the moment a source file lands in Amazon S3 through transcoding, storage, and delivery via a content delivery network, until the video becomes ready for playback in a browser.

3. To perform transcoding with FFmpeg inside a Docker container running on AWS Batch and AWS Fargate, such that containers are created on demand and terminate automatically, thereby eliminating the cost of idle resources.

4. To automate software deployment and infrastructure management through a CI/CD pipeline and Infrastructure as Code.

5. To evaluate the resulting system empirically in terms of quality of experience, transcoding performance, scalability under load, and operating cost.

The first two objectives define what the platform does for its users, and the third defines how the processing is carried out and why, since the choice of on-demand containers is the central hypothesis of the project. The fourth makes the system reproducible and safe to change. The fifth turns the claims of the other four into measurements, which is why every performance figure in Chapter 6 comes from a script that is committed with the source code.

## 1.3 Scope and Deliverables

The scope of this project covers the full vertical slice of a video sharing service: the browser-based user interface, the backend API, the transcoding engine, the cloud infrastructure that hosts them, and the automation that deploys them.

Several areas are deliberately placed outside the scope. The project does not implement digital rights management systems such as Widevine or FairPlay, which would be required to prevent an authorised viewer from redistributing content they can legitimately access. It does not implement live streaming, since the architecture is designed around video on demand. It also does not attempt per-title bitrate ladder optimisation, using instead a fixed ladder of six rungs from 144p to 1080p, of which each video receives those that its source resolution can fill; the rationale and the trade-off involved are discussed in Chapter 7.

## 1.4 Research Methodology

The work combines a review of existing practice with an iterative build-and-measure cycle.

The theoretical component established how the problem is solved at industrial scale before any code was written. Published engineering accounts from Netflix describe how a large platform decomposes video processing into microservices and how a bitrate ladder is optimised per title, and the AWS Video on Demand reference architecture describes the managed-service equivalent. The protocol itself was taken from its specification, RFC 8216, and the encoding parameters from the FFmpeg HLS muxer documentation, rather than from secondary sources. Peer-reviewed studies of serverless video processing supplied both the motivation for the architecture and the measurement vocabulary used later in the evaluation, and the multi-threaded H.264 literature supplied the expected bound against which the vCPU scaling results of Chapter 6 are interpreted.

The practical component followed an incremental development model. Each subsystem, comprising the backend API, the transcoding container, the frontend, and the cloud infrastructure, was built and integrated in turn, with the whole environment described as Terraform code so that every change to it is reviewable and reproducible rather than applied by hand. Correctness was checked by an automated test suite executed on every push through a continuous integration pipeline, which also runs dependency, container and infrastructure security scans.

Evaluation was empirical rather than analytical. Every performance figure reported in Chapter 6 was produced by a measurement script committed alongside the source code, executed against the deployed system rather than a local approximation of it, with the raw output stored as JSON under `docs/results/` so that any table in this report can be traced back to the run that produced it; Table A.1 records that mapping. Where a result could plausibly be an artefact of the measurement tool, it was reproduced with a

second, independently implemented tool before being reported.

## 1.5 Practical Significance

The immediate beneficiaries of this design are small teams and individual creators who need a video platform but cannot justify a permanently running transcoding cluster. The cost comparison in Section 6.7 estimates that processing three hundred videos a month costs roughly $3.40 on the architecture built here against $133.35 on an always-on instance sized for the same work, because compute exists only while a job runs. That difference is what makes video hosting feasible for a service whose upload volume is intermittent, which describes most platforms before they become large.

The design also addresses a requirement that is easy to state and easy to implement incorrectly. Marking a video private is meaningless if the underlying storage remains publicly addressable, and Chapter 4 shows that restricting the API alone does not achieve it. The two-layer scheme used here, keeping the bucket private and enforcing authorisation at the content delivery network, is directly reusable by any application that serves user-owned media from object storage.

Beyond the product itself, the project serves as a worked reference for an event-driven serverless pipeline on AWS, covering the parts that are usually omitted from tutorials: how duplicate message delivery is made harmless, how the infrastructure is expressed as reviewable code across two environments, how security scanning is placed in the path of a merge rather than beside it, and how the resulting system is measured once it is running. Each of these is documented here in enough detail to be repeated.

## 1.6 Main Contributions

The principal contribution of this work is an end-to-end demonstration that a serverless container architecture can serve as the transcoding backbone of a video platform, together with an empirical assessment of what that choice costs and what it saves.

More concretely, the work contributes an event-driven pipeline in which an upload event propagates through Amazon S3, Amazon SQS, and AWS Lambda to AWS Batch without any polling service in between; a containerised FFmpeg worker whose conditional database writes make a duplicate delivery harmless, so that exactly-once *effects* are obtained without relying on exactly-once delivery; a two-layer content protection scheme combining Origin Access Control with CloudFront Signed Cookies so that private videos remain inaccessible even to a viewer holding the exact manifest URL; a chunk-parallel

transcoding path that splits a video of five minutes or more across concurrent jobs and brings a four-hour source to playback in 135 minutes at the production quota; a content moderation pipeline and a role-based console whose recorded decisions make the false positive and false negative rates measurable; a complete Infrastructure as Code description of the AWS environment in thirteen Terraform modules; and a DevSecOps pipeline whose security gate genuinely blocks merges rather than merely reporting findings.

## 1.7 Structure of the Report

The remainder of this report is organised as follows. Chapter 2 reviews how comparable platforms solve the transcoding problem and justifies the technology choices made here. Chapter 3 analyses the functional and non-functional requirements of the system and presents the use case model. Chapter 4 describes the architecture, the data model, the content protection scheme, and the interface design. Chapter 5 details the implementation of each subsystem, the infrastructure automation and continuous integration, the difficulties encountered during development and how they were resolved, and the automated test suite. Chapter 6 presents the deployed system and its user interface, then reports the experimental results for delivery latency, transcoding performance, behaviour under load, and operating cost. Chapter 7 summarises what was achieved, states the strengths and limitations of the delivered system, and outlines directions for future work.

# Chapter 2

# Literature Review and Technologies

## 2.1 Related Platforms and Comparison

Understanding how established platforms solve the transcoding problem provides the necessary context for the design decisions taken in this project.

Netflix offers the most thoroughly documented case. Its original video processing system, internally known as Reloaded, was a monolithic pipeline that proved difficult to evolve as requirements changed. Netflix subsequently rebuilt it as a set of independent microservices running on a platform called Cosmos, decomposing the workload into a Video Inspection Service, a Video Encoding Service, and a Video Quality Service [1]. Cosmos itself is layered: an API tier receives requests, a workflow tier orchestrates the processing steps, and a serverless compute tier performs the actual media work, with the three tiers communicating asynchronously through a priority-based messaging system [2]. Two aspects of this design are directly relevant here. First, Netflix also relies on asynchronous messaging rather than synchronous calls to decouple job submission from job execution, which is precisely the role played by Amazon SQS in this project. Second, Netflix moved from linear encoding to distributed chunk-based encoding, allowing hundreds of machines to encode segments of the same title in parallel and reducing processing latency from days to hours. This project applies the same principle at a far smaller scale: for videos of five minutes or longer, a planner job divides the source into chunks that an array of AWS Batch jobs encodes concurrently and a finalizer job merges, with the degree of parallelism bounded by the Fargate vCPU quota rather than by a fleet of dedicated machines (Section 6.5).

Amazon Web Services publishes a reference architecture for video on demand that provides a useful point of comparison at the level of managed services [3]. That architecture routes an upload from Amazon S3 through an AWS Lambda job submitter into AWS Elemental MediaConvert, stores the output in a second S3 bucket, and delivers it through Amazon CloudFront, with AWS Step Functions orchestrating the workflow. The architecture presented in this report follows the same overall shape but substitutes a self-packaged FFmpeg container on AWS Batch for MediaConvert. This substitution is the central engineering trade-off of the project: MediaConvert is a fully managed service billed per minute of output and requires almost no operational effort, whereas a self-managed container is considerably cheaper per unit of work but transfers the responsibility for image maintenance, dependency updates, and failure handling onto the development team. AWS documentation also confirms that Origin Access Control is the currently recommended pattern for securing an S3 origin, superseding the legacy Origin Access Identity mechanism, which validates the approach adopted in Section 4.4.

Table 2.1 summarises the comparison across the dimensions most relevant to this work.

Table 2.1: Comparison of transcoding approaches across platforms

| **ASPECT** | **NETFLIX (COSMOS)** | **AWS VOD REFERENCE** | **THIS PROJECT** |
|---|---|---|---|
| Compute model | Dedicated microservice platform with serverless compute tier | Managed service (MediaConvert) | Serverless container on AWS Batch / Fargate |
| Parallelism | Chunk-based, distributed across many nodes | Managed internally by the service | Chunk-based on AWS Batch array jobs from five minutes of video, one container below that |
| Bitrate ladder | Per-shot optimisation driven by VMAF | Configurable job template | Fixed ladder: six rungs from 144p to 1080p, limited by the source |
| Queueing | Priority-based messaging system | AWS Step Functions | Amazon SQS with dead letter queue |
| Content protection | DRM | Signed URLs or signed cookies | OAC plus CloudFront Signed Cookies |
| Operational effort | Very high | Very low | Moderate |

## 2.2 Core Models and Principles

### 2.2.1 Serverless Containers

The term serverless container describes a model in which a container image is executed without the developer provisioning or managing the underlying virtual machines, and in which billing is based on execution time rather than allocated capacity. AWS Fargate is the implementation used in this project.

Figure 2.1 contrasts this model with the conventional alternative for a transcoding workload of the size assumed in Section 6.7. In the always-on arrangement on one side of the figure, a cluster is sized for the busiest moment the service expects and then runs continuously, so it is billed for all 730 hours in a month while performing roughly 105 vCPU-hours of actual encoding out of the 2,920 that a four-vCPU instance offers, a utilisation of under four percent. Its capacity is also a hard ceiling: an upload burst larger than the cluster was provisioned for must either wait or be rejected, and the only remedy is to provision for a still larger peak and waste correspondingly more. In the serverless arrangement on the other side, no compute exists between uploads. An upload event enters a queue, a container is started to serve it, and that container terminates when the job finishes, so charges accrue per vCPU-second of real work. The burst is absorbed by the queue rather than by spare capacity, and the degree of parallelism is a configured number rather than a fixed fleet size. The two figures shown, $124.10 against $0.05 of monthly compute, are the same workload priced under the two models.

The choice of Fargate over a function-as-a-service platform such as AWS Lambda deserves justification, because Lambda is the more common answer to serverless workloads. Video transcoding is unsuitable for Lambda in this context for two reasons. The first is duration: transcoding a large file routinely exceeds the maximum execution time of a Lambda invocation. The second concerns resource configuration. A measurement study of serverless video processing found that selecting a cost-efficient memory configuration for transcoding is far from trivial, because the optimal setting depends not only on the type of task but even on the content of the video itself, and the cost difference between the least and most generous memory configuration reached 498% for sequential workloads [4]. Fargate avoids this difficulty by allowing vCPU and memory to be specified explicitly and independently.

A known weakness of the container model is cold start latency. A systematic review of the subject reports that more than half of function invocations spend at least 80% of their startup time pulling the container image [5]. This finding directly motivates the use of a multi-stage Docker build in this project, described in Section 5.2, whose purpose is

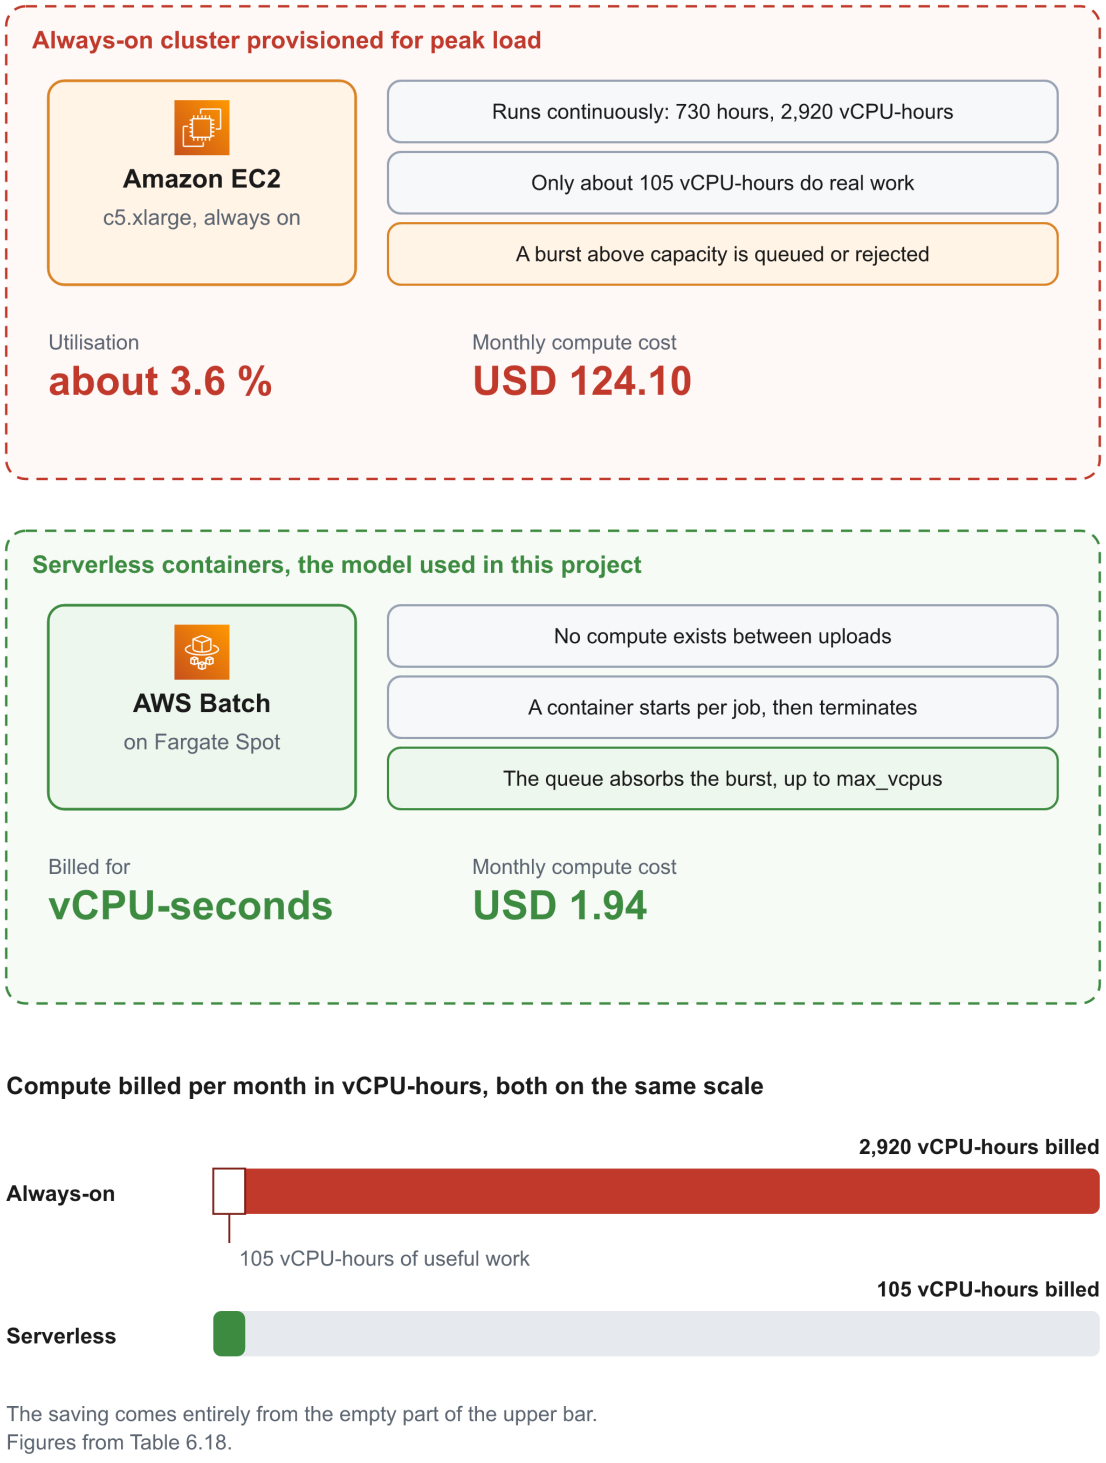



Figure 2.1: *Compute models for a bursty transcoding workload: an always-on cluster compared with on-demand serverless containers*

to minimise the size of the image that must be transferred before work can begin.

### 2.2.2 Event-Driven Architecture

An event-driven architecture propagates work through the emission and consumption of events rather than through direct synchronous invocation. In this project, the completion of an upload to Amazon S3 emits an event notification that is placed on an Amazon SQS queue, from which an AWS Lambda function submits a job to AWS Batch.

The queue is not merely a routing mechanism; it is the component that makes burst absorption possible. If a hundred users upload simultaneously, the queue retains all hundred messages while AWS Batch works through them at whatever rate the compute environment allows. Without this buffer, the system would have to either reject work or provision for peak load permanently. The queue is paired with a dead letter queue so that messages which repeatedly fail processing are isolated for inspection rather than being retried indefinitely.

### 2.2.3 Adaptive Bitrate Streaming and the Bitrate Ladder

HLS delivers a video as a master playlist referencing several rendition playlists, each of which lists the media segments for one quality level. The player measures throughput and switches between renditions at segment boundaries.

Figure 2.2 shows the artefacts this produces and the order in which a player retrieves them. A single source file of arbitrary container, codec and resolution is encoded once per rung of the ladder, and each rung yields both a rendition playlist and the sequence of transport stream segments it indexes. The master playlist sits above them and carries, for each rung, the bandwidth the client should expect to need in order to play it. A player therefore begins by fetching only the master playlist, which is a few hundred bytes, chooses a rung from the declared bandwidths and its own throughput estimate, and only then requests that rung's playlist and its segments. Because every rung is segmented on the same boundaries, the player may change its choice at any segment boundary without interrupting playback, which is the mechanism that lets quality fall rather than the video stall when a connection weakens. The consequence for the transcoding subsystem is that the cost of preparing a video scales with the number of rungs, since each rung is encoded separately even though the source itself is decoded only once. The implementation exploits exactly that distinction, as Section 5.2 describes.

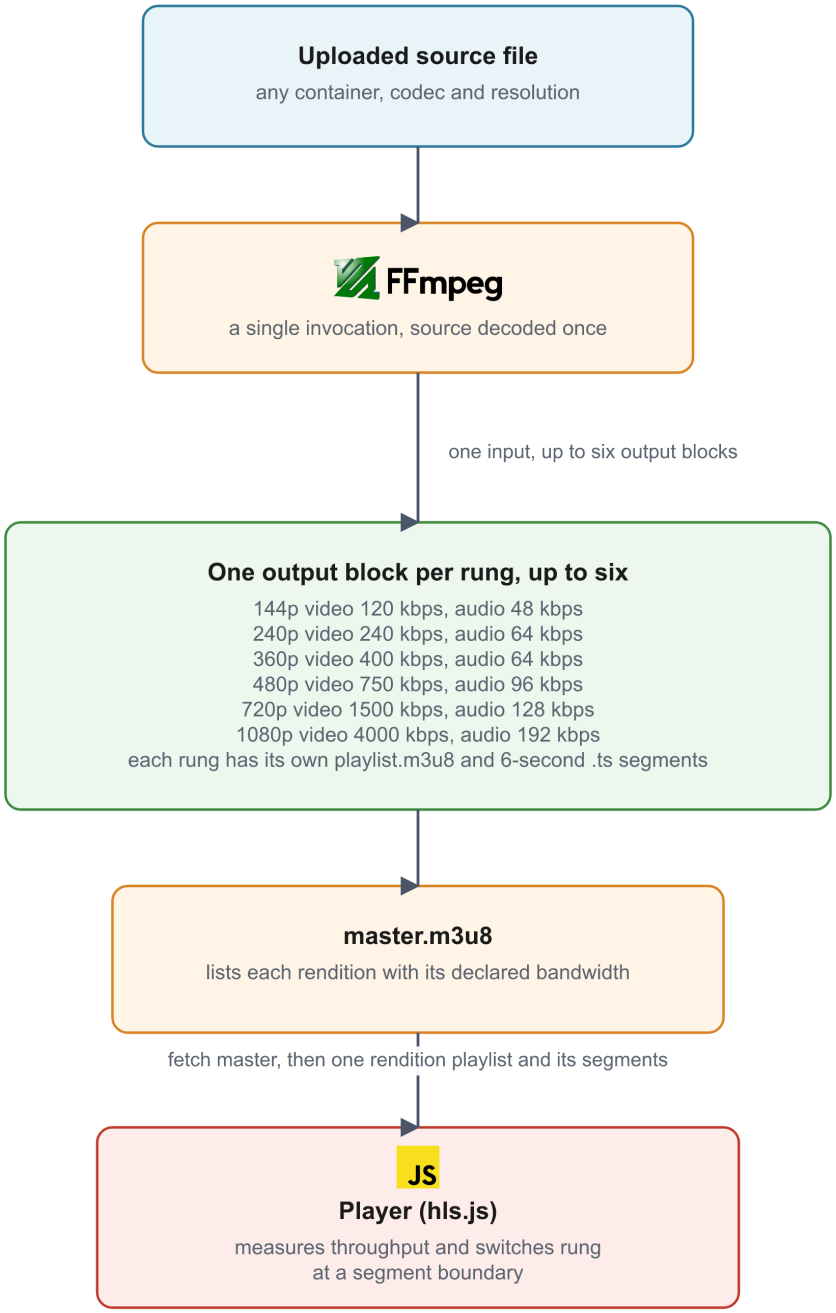



Figure 2.2: *HLS artefacts produced from one source file and the order in which a player retrieves them*

The set of resolution and bitrate pairs offered is called the bitrate ladder, and its construction is an active research area. Netflix demonstrated that the optimal ladder is not fixed but content-dependent, and that the ideal operating points lie on the convex hull of the quality-versus-bitrate curve [6]. By encoding each shot separately under the control of the VMAF perceptual quality metric, Netflix reported bitrate reductions of

between 28% and 38% at equivalent visual quality [7]. The present project uses a fixed ladder of six rungs, which is simpler to implement and reason about; the implications of this simplification are revisited in Section 7.4.

## 2.3 Technology Stack Justification

The frontend is implemented as a React single page application built with Vite, using HLS.js for playback. HLS.js is necessary because most desktop browsers do not support HLS natively; it parses the manifest in JavaScript and feeds segments to the browser through the Media Source Extensions API. Safari, which does support HLS natively, is handled through a fallback path.

The backend is built on Node.js with Express. The decisive factor is that the backend's workload is almost entirely input/output bound rather than CPU bound: it issues pre-signed URLs, queries MongoDB, and returns JSON, while the heavy computation is deliberately delegated to the transcoder containers. Node.js's event loop is well suited to this profile.

MongoDB Atlas provides the persistence layer. Video metadata is naturally document-shaped and its schema evolves as features are added, which suits a document store better than a rigid relational schema. Using the managed Atlas service also removes the need to operate a database cluster inside the project's own infrastructure.

Terraform was selected for Infrastructure as Code over alternatives such as AWS CloudFormation because its module system allows the infrastructure to be decomposed into reusable units with explicit inputs and outputs, and because its plan step makes the consequences of a change visible before it is applied. GitHub Actions was selected for CI/CD because the source code is already hosted on GitHub, which removes the need for a separate automation server.

# Chapter 3

# Requirements Analysis

## 3.1 Stakeholders and User Requirements

Four groups interact with the system, and their differing needs shape the requirements.

The *anonymous visitor* arrives without an account. This group needs to browse public videos, search and filter by category, and watch content immediately, because requiring registration before any content can be seen would deter adoption. The *registered user* additionally needs to upload videos, control whether each video is public, unlisted or private, manage the videos on their own channel, and interact through likes and comments. The *system administrator*, in the context of this project the development team itself, needs the platform to be observable and deployable without manual intervention. Finally, the *operations staff* decide whether uploaded content may be shown: they need a queue of the videos that the automatic screening could not settle, a way to hear an owner's appeal, and figures that tell them how often the screening is wrong.

## 3.2 Functional Requirements

Table 3.1 enumerates the functional requirements derived from the stakeholder analysis. Each requirement is given an identifier so that it can be traced through the design and implementation chapters.

Table 3.1: Functional requirements of the system

| ID | REQUIREMENT | DESCRIPTION |
|---|---|---|
| FR-01 | Registration and login | Users register with a username, email address, and password. Authentication uses JSON Web Tokens carried in the Authorization header. A new account must prove that it can receive mail at its address before it may upload videos; signing in with Google counts as that proof. A new password, at registration, reset or change, is refused when it is a commonly used one, contains the user's own details or appears in a known breach. |
| FR-02 | Password recovery | Users request a reset link by email; the token is single-use and expires after fifteen minutes. A completed reset also confirms the address. |
| FR-03 | Direct upload to S3 | The client requests a pre-signed URL from the backend and transfers the file directly to Amazon S3 without routing the payload through the application server. A file above 512 MiB is transferred in parts of 32 MiB, so that a part that fails is retried without repeating the whole file. |
| FR-04 | Automatic transcoding | Once the upload completes, the system transcodes the source into HLS renditions without any manual trigger. |
| FR-05 | Adaptive playback | The player switches automatically among the renditions produced for the video, chosen from six rungs between 144p and 1080p according to the source resolution, as the available bandwidth changes. |
| FR-06 | Visibility control | Each video is public, unlisted, or private. A public video is listed in the catalogue; an unlisted one is reachable only by its direct link and appears in no listing; a private one is visible to its owner alone. The owner can change the setting after upload. |
| FR-07 | Channel management | Users view their own uploads, manage visibility, update video details, and delete a video together with all of its stored artefacts. |
| FR-08 | Search and filtering | Users search by title, description, or tags, and filter by category. |
| FR-09 | Engagement | Users express likes and dislikes and post comments; a comment may be removed by its author or by the video owner. |
| FR-10 | View counting | The system records a view only after playback has genuinely started, and does not count repeated views from the same viewer within a short window. |
| FR-11 | Related videos | The watch page suggests further videos drawn from the same category and the same uploader. A suggestion is subject to the same visibility rule as the video itself, so the list never reveals one the viewer could not open directly. |

Table 3.2 continues the list with the requirements of moderation and operation, which Section 4.5 designs.

Table 3.2: Functional requirements of moderation and operation

| ID | REQUIREMENT | DESCRIPTION |
|---|---|---|
| FR-12 | Automatic screening | Before a video is published, the system samples frames from it and classifies them; a video with clearly violating content is removed automatically, and one with doubtful content is held back for review. Screening that cannot be completed holds the video back and does not publish it. |
| FR-13 | Viewer reports | A signed-in viewer can report a video for a reason chosen from a short list, and has at most one open report per video. |
| FR-14 | Staff review | Operators approve or remove the held-back and reported videos, and every decision carries a reason from a closed list. |
| FR-15 | Appeals | The owner of a removed video can appeal once per decision, an operator resolves the appeal with a note, and a person other than the owner cannot learn that the video exists. |
| FR-16 | Accountability | Every decision is recorded together with what the automatic screening had concluded, so that the rates of false positives and false negatives can be estimated, the latter from a random audit sample, and an auditor can read them without being able to change a decision. |
| FR-17 | Role management | An administrator assigns the roles operator, auditor and administrator, cannot change their own role and cannot demote the last administrator; every change is recorded. |

Requirement FR-03 deserves particular comment because it shapes the architecture more than any other functional requirement. Routing a multi-gigabyte upload through the backend would consume server memory and bandwidth proportional to the number of concurrent uploads and would make the API server the bottleneck of the entire platform. Issuing a time-limited pre-signed URL and letting the browser transfer the file directly to Amazon S3 removes that bottleneck entirely: the backend handles only a small JSON request regardless of file size.

## 3.3 Non-Functional Requirements

The non-functional requirements are stated in measurable terms wherever possible, so that Chapter 6 can report whether they were met; they are listed in Table 3.3.

Table 3.3: Non-functional requirements of the system


| ID | ATTRIBUTE | REQUIREMENT |
|---|---|---|
| NFR-01 | Latency | Time-to-First-Frame should remain low enough that playback feels immediate; the measurement methodology is defined in Section 6.3. |
| NFR-02 | Scalability | The pipeline must absorb a burst of concurrent uploads without losing work, processing them as capacity permits rather than rejecting them. |
| NFR-03 | Reliability | A failed transcoding job must not silently disappear: it must be retried where retrying could succeed, and must raise an alert carrying the reason when it cannot. The retry and alerting mechanisms that satisfy this requirement on the deployed path are described in Section 5.5. |
| NFR-04 | Cost efficiency | Compute cost must accrue only during actual transcoding, with no charge for idle capacity. |
| NFR-05 | Security of content | Private videos must be inaccessible to unauthorised viewers even when the exact manifest URL is known. |
| NFR-06 | Security of the API | Authentication endpoints must resist brute-force attempts, and the origin of cross-origin requests must be restricted to an explicit allow-list. |
| NFR-07 | Reproducibility | The entire infrastructure must be reproducible from source control through a single command. |
| NFR-08 | Maintainability | Changes must pass automated tests and security scanning before reaching the main branch. |

Requirement NFR-05 is worth distinguishing from ordinary access control. Restricting an API response is straightforward, but a video is not delivered by the API: it is delivered by a content delivery network as hundreds of individual segment files. An access control scheme that protects only the API therefore leaves the actual content unprotected, a gap that Section 4.4 addresses explicitly.

## 3.4 Use Case Model

Figure 3.1 presents the use cases of the people who use the platform. Three actors appear: the anonymous visitor, the authenticated user, and the transcoding system itself, which is modelled as an actor because it initiates processing autonomously in response to events rather than in response to a direct user action. Verifying the e-mail address is the use case that lets a new account upload (requirement FR-01).

The diagram makes visible an important property of the design: the transcoding use cases are not invoked by the user at all. The user's upload action triggers them indirectly through the event chain, which is why they are attached to the system actor rather than

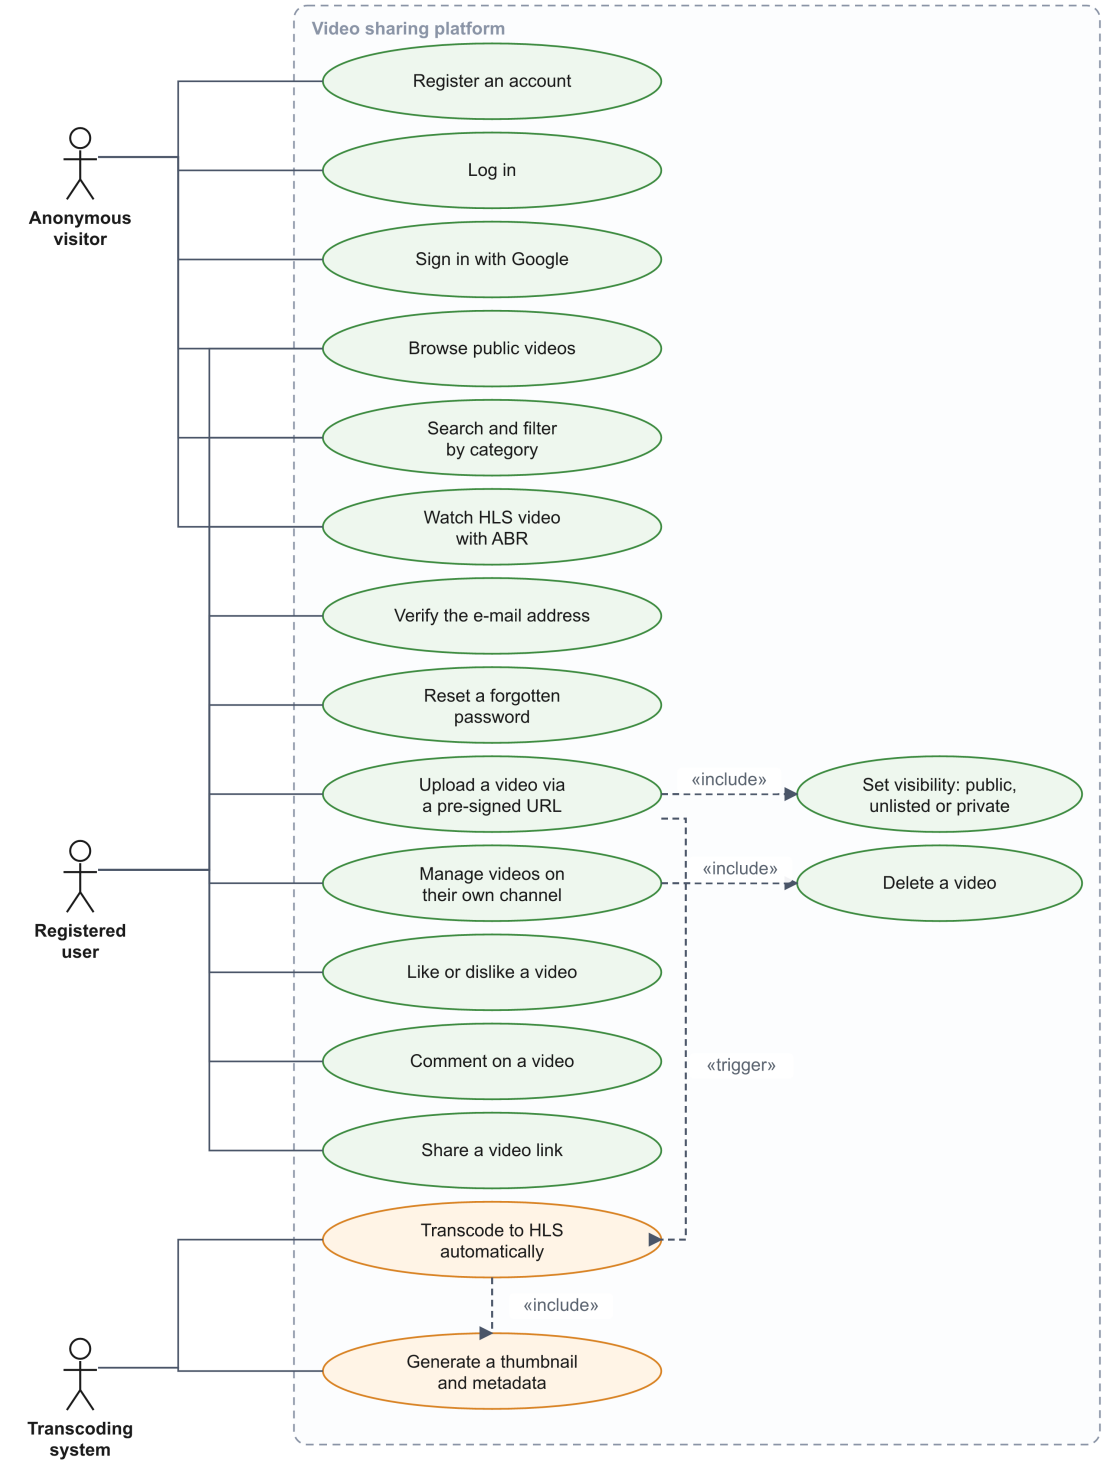



Association lines carry no arrowhead, as UML specifies. Only «include» and «trigger» relationships are directed. The transcoding use cases attach to the system actor because events start them, not a human action.

Figure 3.1: *Use case diagram of the video sharing platform*

to the human actors. This separation is what allows the browser to return control to the user immediately after the upload completes, without waiting for processing to finish.

Figure 3.2 adds the use cases of moderation and operation, which are requirements FR-12 to FR-17 (Table 3.2), designed in Section 4.5. They are drawn apart because adding them to Figure 3.1 would make that figure taller than a page. Three more actors appear, the roles operator, auditor and administrator. The use cases of each role stand together, and an administrator can also do everything an operator or an auditor can, which is why each association is drawn once. The transcoding system keeps its place as an actor because the screening runs inside the transcoder. Three things lead to a decision that only staff can take: what the screening holds back, a report from a viewer, and an appeal from the owner of a removed video.

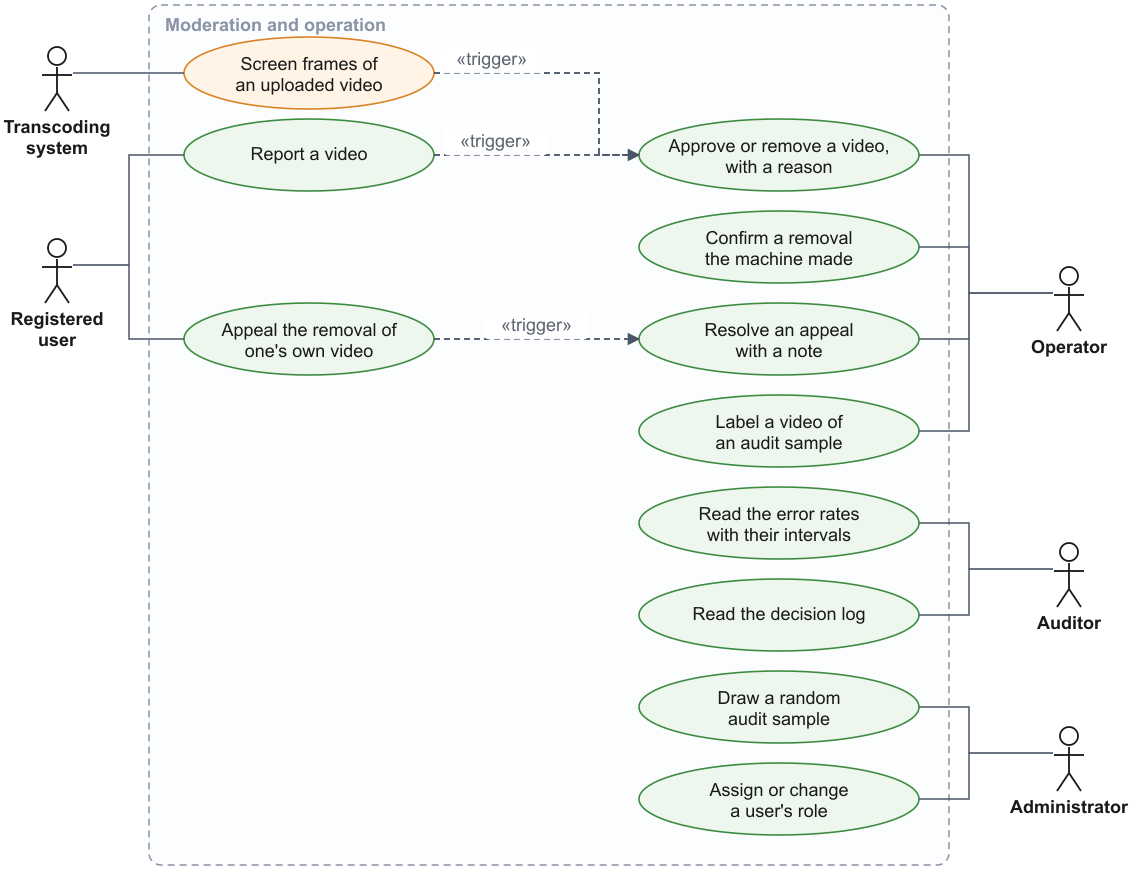


Reporting and appealing are open to every signed-in user. An administrator can also do everything an operator or an auditor can, so each association is drawn once, at the role that owns the use case. Screening acts on its own; what it holds back, and what viewers report, reaches an operator for a decision.

Figure 3.2: *Use case diagram of moderation and operation*

Table 3.4 specifies the most architecturally significant use case in detail.

Table 3.4: Use case specification: upload a video

| **FIELD** | **CONTENT** |
|---|---|
| Identifier | UC-07 |
| Actor | Authenticated user |
| Precondition | The user holds a valid JSON Web Token and a verified e-mail address. |
| Trigger | The user selects a video file and submits the upload form. |
| Main flow | 1. The client validates the file type and size locally.<br>2. The client calls the initiate-upload endpoint with the file metadata.<br>3. The server validates the metadata, creates a database record with status `UPLOADING`, and returns a pre-signed URL valid for fifteen minutes.<br>4. The browser transfers the file directly to the raw S3 bucket.<br>5. The client confirms completion and the record moves to `PROCESSING`.<br>6. The transcoding pipeline runs asynchronously and eventually sets the record to `READY`. |
| Alternative flow | If the file type is not an accepted video format or the size exceeds the limit, the server rejects the request before issuing a URL, and no orphan record is created. For a file larger than 512 MiB, step 3 returns a URL for each part of 32 MiB instead, and the server checks the stored parts before the object is assembled. If the e-mail address is not verified, the server refuses the request with the code `EMAIL_NOT_VERIFIED` and the interface offers to send the link again. |
| Postcondition | The video appears on the user's channel, initially as processing and subsequently as ready to play. |

# Chapter 4

# System Design

## 4.1 High-Level Architecture

The system is organised into four tiers, shown in Figure 4.1: a client tier running in the browser, a delivery tier built on Amazon CloudFront, an application tier comprising the backend API and the database, and a processing tier that performs transcoding.

The separation between the application tier and the processing tier is the defining characteristic of this design. The backend API never touches video content: it issues pre-signed URLs, records metadata, and answers queries, while every byte of video flows directly between the browser, Amazon S3, and CloudFront. This separation has three consequences that together justify the architecture. The API server's resource consumption becomes independent of video size and upload concurrency. The processing tier can scale according to transcoding demand without affecting the responsiveness of the interface. And a failure in the processing tier degrades the system gracefully, leaving already-published videos playable while newly uploaded ones remain in a pending state.

Two later additions sit inside this structure and do not change it. Content moderation runs in the processing tier, as the last step before a video is published, so that the check neither delays the upload nor adds a component to operate (Section 4.5). And the console that human reviewers use is a role-restricted part of the same single page application and the same backend API, not a separate system.

## 4.2 Transcoding Pipeline Design

Figure 4.2 traces the sequence of interactions from the moment the user initiates an upload until the video becomes available.

Two design decisions embedded in this sequence merit explanation.

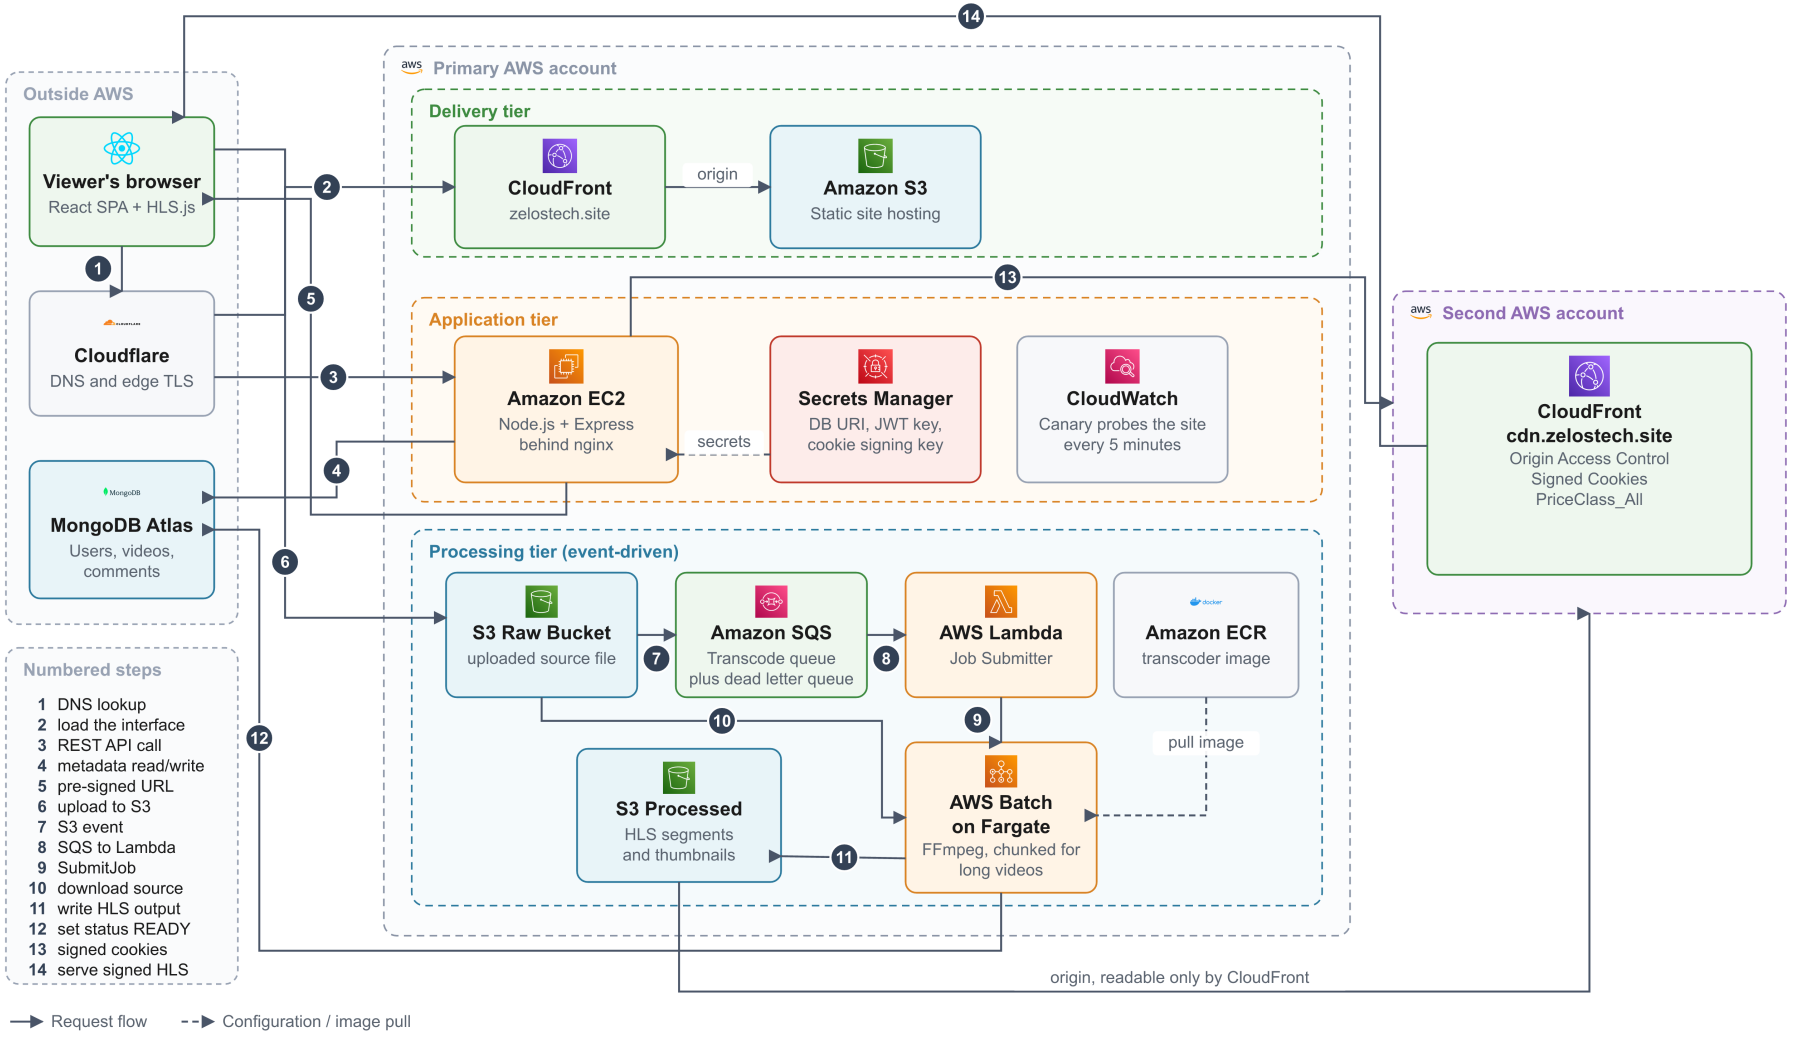



Figure 4.1: *Overall system architecture, showing the deployment boundaries and the numbered data flow from an anonymous visit through upload, transcoding and signed delivery; the key at the lower left names each step*

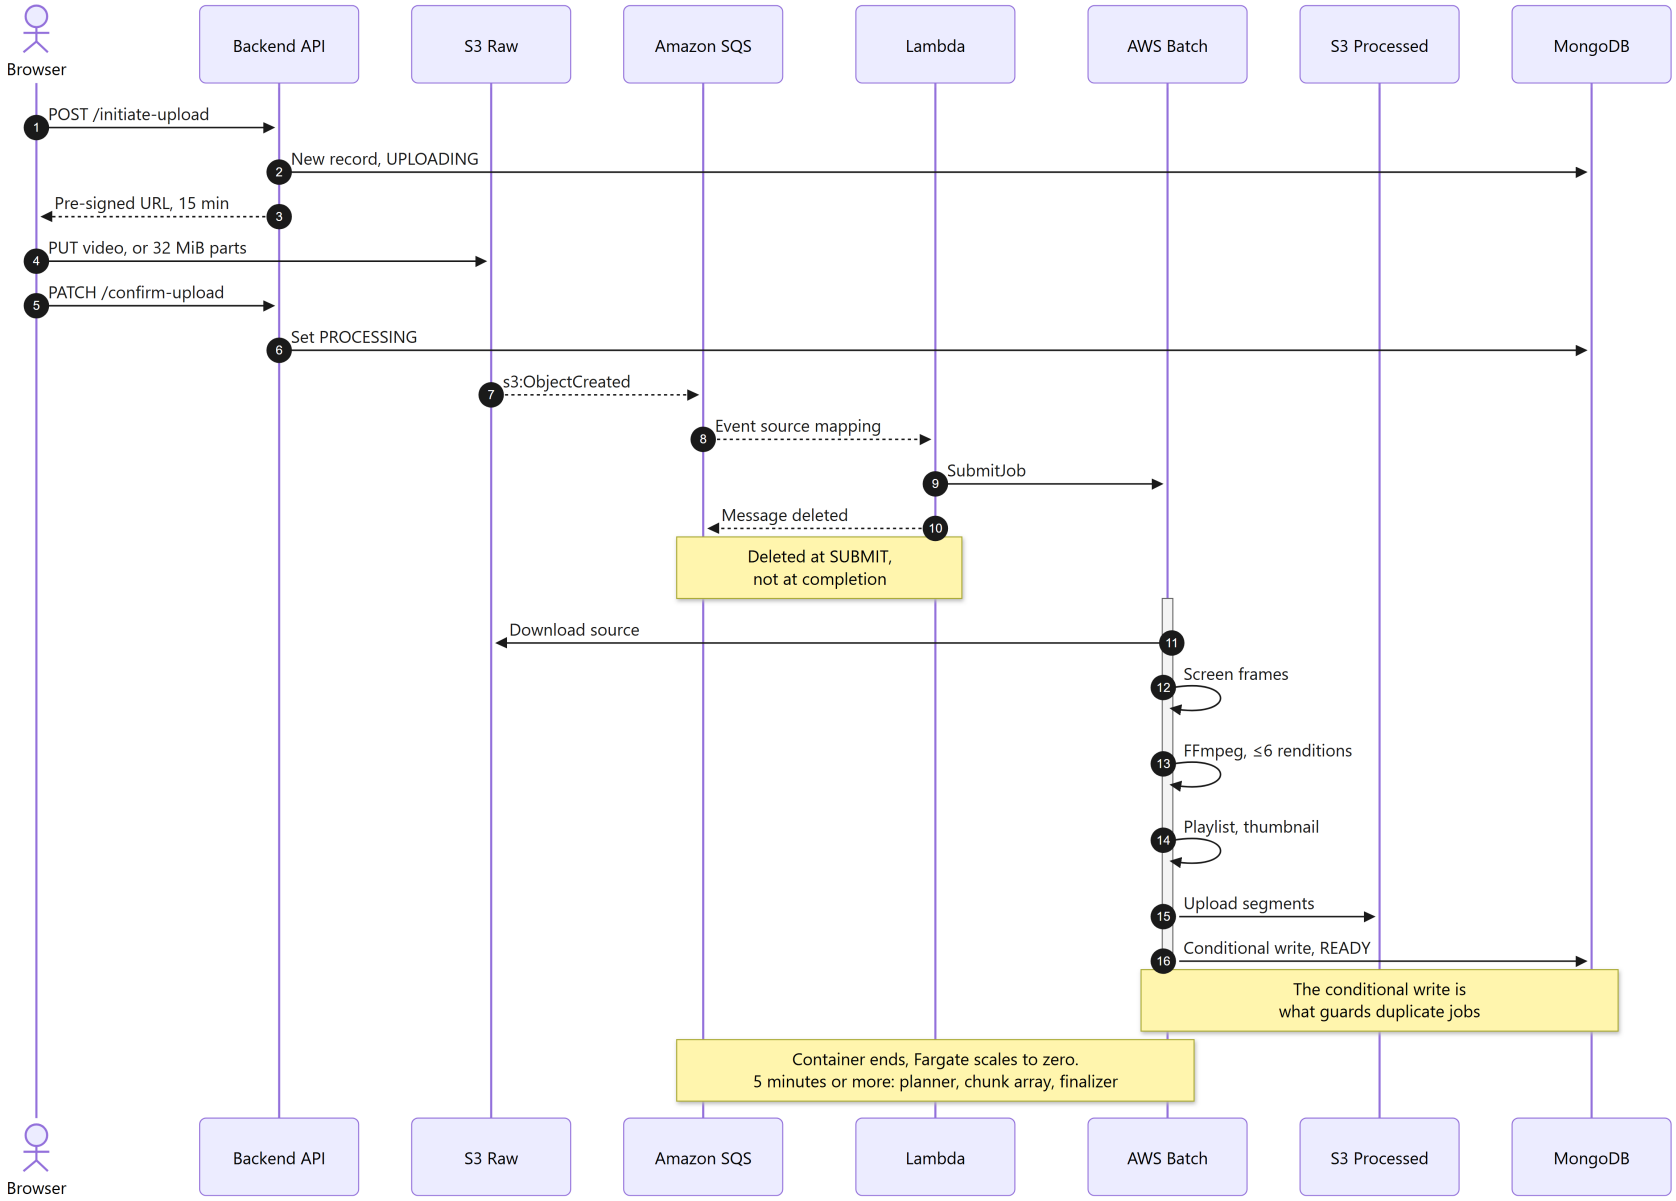



Figure 4.2: *Sequence diagram of the event-driven transcoding pipeline for one container; a video of five minutes or more takes the chunked path of Table 4.1*

The first concerns the ordering of database record creation and URL issuance. The backend creates the database record *before* generating the pre-signed URL, and derives the S3 object key from the identifier of that record. The alternative, generating a key first and creating the record afterwards, introduces a race condition: the S3 event notification can arrive and trigger transcoding before the record exists, at which point the transcoder has no row to update and the job fails. Creating the record first eliminates this class of failure entirely.

The second concerns the visibility timeout of the SQS message. Amazon SQS hides a message from other consumers for a configured period after it is received, and redelivers it if the consumer has not deleted it by then. Transcoding a large file can easily exceed any reasonable fixed timeout, which would cause the same video to be processed twice concurrently. The transcoder therefore implements the heartbeat pattern: while FFmpeg runs, a timer periodically extends the visibility timeout of the in-flight message. The message is deleted only after the job completes successfully. If the container crashes, the heartbeat stops, the timeout lapses, and the message returns to the queue for another attempt.

That description is accurate about the transcoder's `worker` mode, in which the container consumes from the queue itself, but it is important to be precise that this is not the mode the deployed system runs. The container image and the AWS Batch job definition both invoke `batch` mode, in which the video identifier and object key arrive as environment variables and the container never contacts SQS at all. The queue is consumed instead by the Lambda submitter, which reads the message, submits a Batch job, and returns immediately. Because the Lambda's work is finished at that point, the message is deleted when the job is *submitted*, not when transcoding completes.

The consequence is that on the deployed path there is no heartbeat, and the message is long gone before FFmpeg starts. Two properties the pattern was chosen to provide therefore have to be obtained elsewhere. Protection against duplicate processing rests entirely on the conditional database writes described in Section 5.2, which is where it belongs in any case, since Burrows' analysis of leases (Section 5.6) shows that a renewal timer cannot by itself guarantee mutual exclusion. Retrying a failed job, which the heartbeat design delegated to SQS redelivery, has no equivalent unless AWS Batch is configured to provide it; that it originally was not is discussed in Section 5.5.

Retaining the worker-mode implementation is a deliberate choice rather than an oversight: it allows the transcoder to be run against the queue directly during development without provisioning Batch. Recording which of the two modes the evaluated system actually executes matters, though, because a mechanism present in the source but absent

from the deployed path cannot be credited with the guarantees it would provide if it ran. Section 5.5 draws the same distinction about content protection.

### 4.2.1 Upload of Large Files

The sequence of Figure 4.2 uses one pre-signed request, which suits files up to a few hundred megabytes. For larger files the design switches to a multipart upload, because a single transfer that fails near its end must be repeated in full and Amazon S3 accepts at most 5 GiB in one request. The backend chooses the path from the declared size: a file of up to 512 MiB is sent with one pre-signed POST, and a larger file is divided into parts of 32 MiB.

Both paths keep the property that motivated direct upload, that the payload never passes through the application server, and both keep the limits enforced by the storage service and not by the client. For the single request, the signed policy fixes the object key, the content type and the size range. For a multipart upload the backend signs one URL per part for exactly that part's length, so S3 itself refuses a part of any other size, and when the client reports the upload complete the backend lists the parts that S3 holds and checks them before it asks S3 to assemble the object. The ceiling on the size of a file is a configuration value, with a hard limit of 20 GiB in the source, which is 640 parts of 32 MiB, and 20 GiB in the deployed system. An upload that is abandoned is cleaned up in two ways: a lifecycle rule aborts incomplete multipart uploads after two days, and a periodic reconciler in the backend removes a draft that has stayed in the `UPLOADING` state for more than a day.

### 4.2.2 Chunk-Parallel Transcoding of Long Videos

The pipeline of Figure 4.2 gives each video to one container. That is adequate for short videos and fails for long ones: on a single vCPU, FFmpeg ran roughly four to five times slower than real time in the measurements of Sections 6.4 and 6.5, so a long source would exceed the two-hour limit placed on a job however many vCPUs the account holds. The design therefore divides a video of five minutes or more into chunks that are encoded concurrently, and keeps the single-container path for shorter videos, where splitting costs more than it saves.

The job that the Lambda submitter starts becomes a planner. It reads the structure of the source over HTTP without downloading it and divides the video at boundaries that are whole multiples of a six-second group of pictures, counted in frames so that a rate such as 29.97 frames per second does not accumulate a fractional error. It then submits

the jobs of Table 4.1 to the same AWS Batch service.

Table 4.1: Jobs of the chunked path

| JOB | COUNT | TASK SIZE | RESPONSIBILITY |
|---|---|---|---|
| Planner | 1 | Default | Probes the source, computes the chunk boundaries, and submits the other jobs |
| Audio | 2 | Default | Encodes the audio once for the whole video, one job per bitrate (64 and 128 kbit/s) |
| Chunk | One per chunk, as an array job | 4 vCPU, 8 GiB | Reads its own range of the source over HTTP and encodes every rendition of the ladder for that range |
| Finalizer | 1 | Default | Runs after every chunk has ended; joins the playlists, measures the bandwidth of each rendition from the segments, extracts the thumbnail, screens the content, and sets `READY` |

Three properties of this design are deliberate. The chunk array goes to a second, lower-priority job queue that shares the Fargate Spot environment of the main queue, so that a short video submitted while a long one is encoding is scheduled ahead of its remaining chunks and does not wait for all of them. The number of chunks follows the number of tasks that can run at once, about three chunks per slot and none shorter than about a minute, so a larger quota produces smaller chunks. And the planner declines to split a source that cannot be split safely, which means a variable frame rate, an unknown duration, or audio and video that differ by more than 0.25 seconds; such a video falls back to the single-container path and is not failed.

While a chunked video is encoding, its child jobs periodically touch the `updatedAt` field of the video. The reconciler that returns a video stuck in `PROCESSING` for more than six hours to a consistent state would otherwise mistake a long and healthy encode for a stuck one. How this path behaves, including where adding vCPUs stops helping, is measured in Section 6.5.

## 4.3 Database Design

The persistence layer uses MongoDB Atlas with eight collections. Three of them, `User`, `Video` and `Comment`, model the platform itself and are shown in Figure 4.3. The other five exist to moderate and operate it, and are described after the state machine of the video.

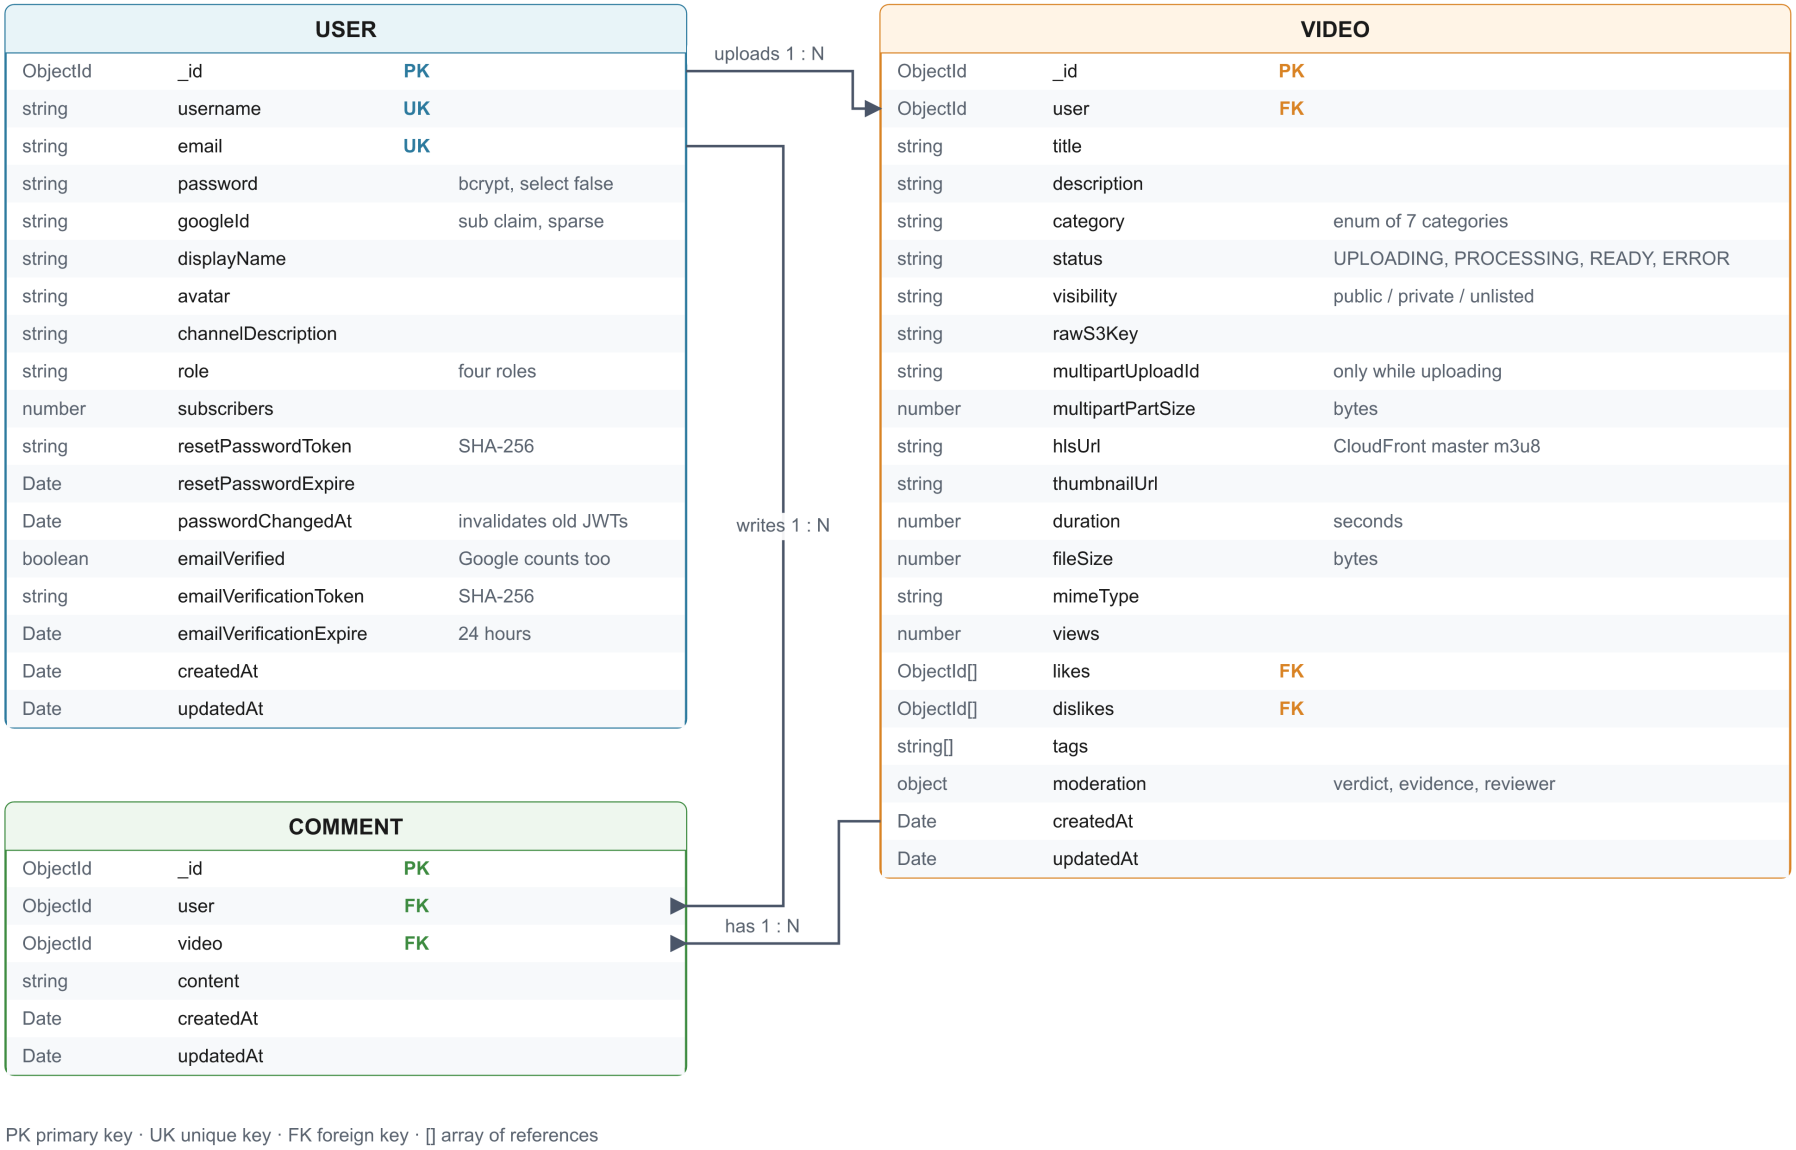



Figure 4.3: *Entity relationship diagram of the core MongoDB collections*

The Video document carries a status field that acts as a state machine with four values. A record begins as UPLOADING when the pre-signed URL is issued, moves to PROCESSING once the upload is confirmed and the job is submitted, and finally reaches either READY or ERROR. Modelling the lifecycle explicitly rather than inferring it from the presence of other fields makes the interface straightforward: the client simply renders a different state for each value, and a video that failed to transcode is distinguishable from one that is merely slow.

A second state, independent of the first, lives in the moderation sub-document of Video: the verdict (approved, flagged or blocked), whether it came from the machine or from a person, the labels that were its evidence, and, written exactly once and before any person first changes the verdict, autoStatus, the machine's own conclusion (Section 4.5). The five collections that support moderation are summarised in Table 4.2 and shown in Figure 4.4.

Table 4.2: Collections that support moderation and operation

| COLLECTION | ONE DOCUMENT IS | CONSTRAINT |
|---|---|---|
| Report | A viewer's report of a video | At most one open report per viewer and video, by a partial unique index |
| ModerationEvent | One decision by a person | Append only: no route edits or deletes it |
| Appeal | An owner's appeal against a removal | One per video and decision time, by a unique index |
| AuditSample | A video drawn into a random audit | A video enters at most once, by a unique index on the video |
| RoleChange | A change of one user's role | Append only: who changed whom, from which role to which |

Likes and dislikes are stored as arrays of user identifiers embedded within the video document rather than as a separate collection. The denormalisation is justified at this scale because the counts are always read together with the video, and because a single user can appear at most once in each array, so the arrays cannot grow through repeated interaction by the same person.

It should not be justified more strongly than that. Uniqueness bounds each array by the number of distinct users, which is a bound only in the formal sense; on a widely viewed video it is exactly the growth that a document store is poorly suited to hold, against MongoDB's document size limit. The cost is also paid on reads that do not want it, since a listing of twelve videos retrieves every identifier in all twenty-four arrays merely to display counts. The conventional remedy is a separate collection with a compound unique index on video and user, plus a denormalised counter on the video. That is the

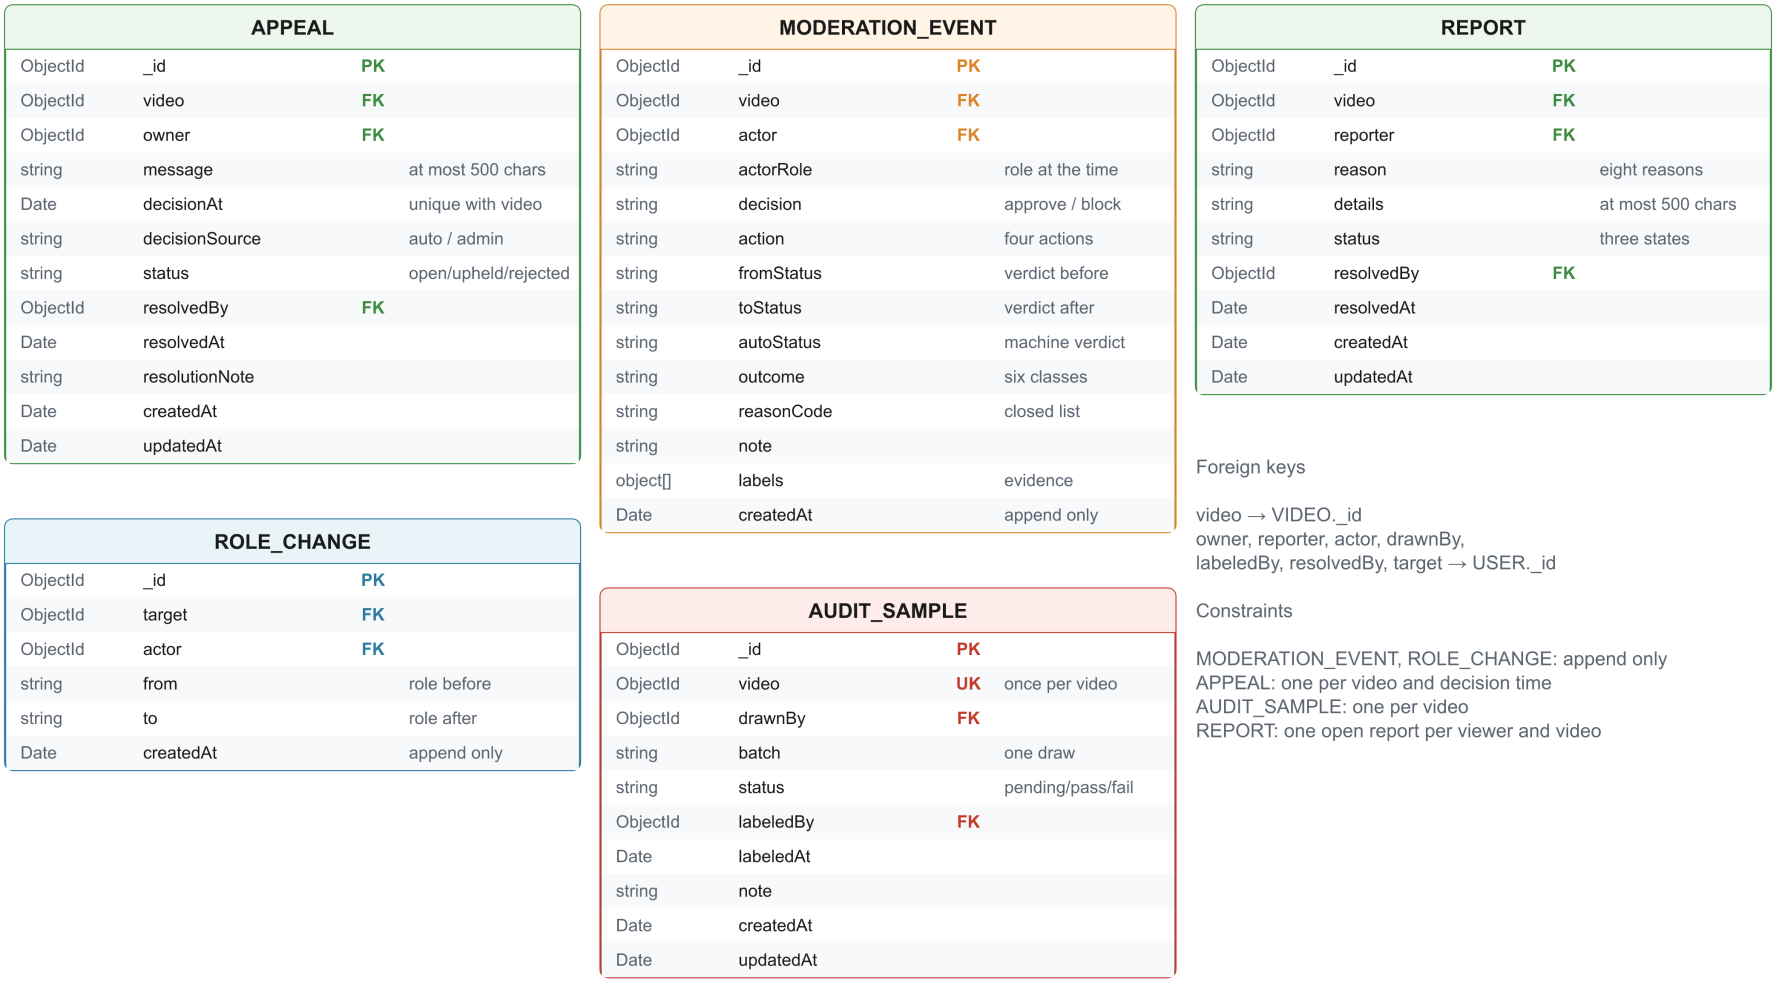



Figure 4.4: *Entity relationship diagram of the collections that support moderation and operation; every video field refers to* `Video` *and every user field to* `User`

right structure for a system expecting popular content, and the reason it was not adopted here is scale rather than principle. That is a different claim from the design being correct in general, and it is recorded as such.

Indexes are defined to match the actual query patterns. A compound index on visibility, status, and creation time supports the home page listing, which always filters on the first two fields and sorts on the third.

Search is the exception. The collection carried a text index on title and description, described as supporting the search feature, but no query ever used it: search is implemented as a case-insensitive regular expression matched against title, description and tags, and MongoDB cannot serve an unanchored regular expression from an index. Every search was a full collection scan, and the index cost write throughput and storage while serving nothing. The index has been removed rather than the query rewritten, because switching to a text search would change the feature's behaviour and not merely its cost: the regular expression matches substrings inside words and covers the tags field, neither of which a text index does. At the scale of this project a full scan is acceptable.

## 4.4 Content Protection Design

Protecting private content requires two complementary mechanisms, because each addresses a different threat.

Origin Access Control makes the processed S3 bucket entirely private and grants read access exclusively to the CloudFront distribution through a bucket policy. This prevents a viewer from bypassing the content delivery network and fetching objects directly from S3, which would both circumvent any access control implemented at the edge and incur higher data transfer charges.

Origin Access Control alone, however, does not determine *who* may retrieve content through CloudFront. Without a second mechanism, any person holding a manifest URL can download the video regardless of its visibility setting, which would make the private mode ineffective in practice. The system therefore adds CloudFront Signed Cookies backed by a trusted key group [8]. The backend verifies the requester's permission using exactly the same service function that governs the API response, signs a policy scoped to the directory of that single video, and sets the resulting cookies on the response. CloudFront rejects any request lacking a valid signature with HTTP 403 at the edge.

Signed cookies were chosen over signed URLs because of the structure of HLS. A playback session retrieves a manifest and then hundreds of individual segment files, each as a separate request. Signing each URL individually would require rewriting every

entry inside the manifest, typically using an edge function, which adds considerable complexity and cost. A single set of cookies covers the entire directory and is attached automatically by the browser to every subsequent request.

The policy is signed as a custom policy rather than a canned policy. This distinction is not cosmetic: a canned policy does not permit wildcards in the resource path, whereas the required scope is an entire directory. The custom policy expresses the resource as a pattern covering the manifest and all segments of one specific video, which grants exactly the access needed and no more.

One consequence of this design deserves stating precisely, because it is easy to describe the scheme as protecting private videos and thereby understate it. The edge does not distinguish one visibility level from another: *every* manifest and segment requires a valid signature, and a request without one is refused whatever the video's visibility. What visibility governs is the authorisation decision made earlier, when the backend decides whether to issue cookies at all. All three levels are thus protected identically at the edge and differ only in who can obtain the credential.

That uniformity has a limit that the design has to accommodate. A cookie authorises exactly one video's directory, whereas a catalogue page renders thumbnails for many videos at once, and no single cookie can cover them. Rather than weaken the policy scope to span the whole bucket, the distribution carves out a separate cache behaviour for the thumbnail path that requires no signature. The justification is that a thumbnail is not the asset the mechanism exists to protect: it is a single low-resolution still, already shown to anyone permitted to see the video in a listing, and treating it as public costs nothing that the scheme was designed to prevent. The narrower point is that the protected unit is the stream, not every byte associated with a video.

## 4.5 Content Moderation and Operations Design

A platform that publishes what its users upload has to decide, for each upload, whether it may be shown. No single check can be trusted with that decision, because an automatic classifier errs in both directions: it removes harmless videos, which are false positives, and it lets harmful ones through, which are false negatives. The design therefore stacks four layers, each of which can correct the one before it: automatic screening, reports from viewers, review by staff, and a random audit of what was approved. It also records every human decision together with what the machine had concluded, so that the error rates of the earlier layers can be estimated and not assumed.

### 4.5.1 Automatic Screening

Screening runs inside the job that finishes the video and writes its verdict in the same conditional write that marks the video `READY`, so a video is never published without a verdict unless screening was switched off explicitly. On the single-container path it runs before transcoding, and on the chunked path in the finalizer. A video that is blocked is still transcoded, so that staff can watch it when its owner appeals.

The job samples one frame every five seconds, at most 120 frames, scaled to at most 720 pixels wide, and sends each to the image moderation operation of Amazon Rekognition [9]. The image operation was preferred to the video operation for a concrete reason: the video operation accepts stored videos only if they are encoded with H.264 in an MPEG-4 or MOV container and are at most 10 GB [10], whereas the platform accepts MKV, WebM and AVI uploads of up to 20 GiB, and FFmpeg in the container can decode all of them. The image operation also runs synchronously inside a job that is already running, so it needs no notification topic and no polling, and its cost has a ceiling: at the Singapore list price of 0.00125 USD per image, for the first million images of the month, a video costs at most 0.15 USD. The price of this choice is that sparse sampling can miss content that appears for less than the interval between two samples, which is why screening is the first layer and not the only one.

Each label returned for a frame is looked up in a policy table that maps it to one of three actions (Table 4.3). The table sets policy at the coarse levels of the label taxonomy and uses the finest level only to exclude a specific concept, so that a bare male chest, for example, does not send a video to review merely because its parent label is non-explicit nudity.

Table 4.3: Actions assigned to Rekognition labels by the screening policy

| ACTION | LABELS | EFFECT |
|---|---|---|
| block | Explicit nudity and sexual activity, sex toys, graphic violence, death and emaciation, hate symbols and extremism | The video is removed automatically when a label reaches 90% confidence |
| review | Non-explicit nudity, obstructed intimate parts, violence, explosions, visually disturbing content, crashes | The video is held back for review when a label reaches 60% confidence |
| ignore | Weapons, bare back, exposed male nipple, and any label that is not in the table | No effect |

Two refinements keep the policy from over-reaching. A frame that Rekognition classifies as animated or illustrated with at least 80% confidence lowers graphic violence and death from *block* to *review*, since violence in a game or a cartoon is not the violence

the rule is about; explicit sexual content and hate symbols are not lowered, because a drawing violates the rule as much as a photograph does. And screening fails closed: a video for which no frame could be analysed, or fewer than 80% of the planned frames, is held back for review and is not published, so that an unavailable service produces a delay and not a publication.

### 4.5.2 Moderation States and Visibility

The verdict is stored as `approved`, `flagged` or `blocked`, independently of the transcoding status of Section 4.3. Whether a video has finished encoding says nothing about whether it may be shown, and a video can be `READY` and still hidden. A flagged video appears in no listing and is visible only to its owner and to staff. A blocked video can be played by staff alone, and its owner can appeal the removal. The filter that implements this is one function used by every public query path, for the reason given for authorisation in Section 5.1: copies of a rule drift apart. A video uploaded before moderation existed carries no verdict and is treated as approved.

### 4.5.3 Review, Appeals and Audit

Amazon's own guidance expects people to review a small share of the content, typically one to five per cent of the total volume, already flagged by the model [9]. Staff clear the review queue by approving or blocking each video, and every decision must carry a reason code from a short, closed list: for an approval, for example, a model error, fiction or a game, or an acceptable context; for a removal, for example content missed by the model, an upheld report or a failed audit; and, for a video that the machine has already removed, a confirmation that it was right. The list is closed because free text cannot be counted, whereas a count of how many removals were reversed because the content was a game points to the threshold that needs adjusting.

Each decision is appended to an event log that records who decided and in which role, the verdict before and after, the conclusion the machine had reached, the reason code, and the outcome class of Table 4.4. The machine's conclusion is copied onto the video once, immediately before a person first changes the verdict. Without that snapshot the first human decision would overwrite the very fact that is needed to say whether the machine was right. No route edits or deletes an event, because the auditor's work depends on the log being intact.

Table 4.4: Outcome class of a human decision, given the machine's conclusion

| OUTCOME | MACHINE | PERSON | MEANING |
|---|---|---|---|
| False positive | blocked | approves | The machine removed a video that was acceptable |
| Flag noise | flagged | approves | The flag did not need a person; it is not counted as a wrongful removal |
| False negative | approved | blocks | A violating video was published |
| True positive | blocked or flagged | blocks | The machine was right |
| True negative | approved | approves | The machine was right, for example a report found unfounded or an audit sample that passed |
| Unclassified | not known | either | A video from before the snapshot existed; it enters no rate |

The owner of a removed video can appeal, once per decision, with a message of at most 500 characters; a new decision, such as the video being restored and later removed again, allows a new appeal. A person who does not own the video receives a not-found response, for the same reason as for visibility, and an operator resolves the appeal as upheld or rejected with a note. This follows the Santa Clara Principles, which ask a platform to notify the person affected and to offer an appeal that is reviewed by a person who took no part in the first decision [11]. Appeals are also the most reliable source of false positives, since only the owner has a reason to say that the machine was wrong.

False negatives are harder to find, because a missed video is one among thousands that were approved and viewer reports see only the most conspicuous of them. The design therefore draws a random sample of approved videos, which staff label *pass* or *fail*; the proportion of failures in the sample estimates the rate at which violating videos get through. A video can enter a sample only once, so its label is never counted twice.

### 4.5.4 Measuring the Screening

The console reports four figures, each with its denominator and a 95% Wilson confidence interval [12]: the share of automatic removals that staff reversed, which is the false positive rate; the share of flags that staff confirmed, which is the precision of the flag; the share of each group that has been reviewed at all, which is coverage; and the false negative rate. The Wilson interval is used because the counts are small, and unlike the normal approximation it stays within zero and one and remains usable when the observed rate is near zero. The false negative rate comes only from the random audit and never from viewer reports, which would bias it low. A video that no one has reviewed is

reported as unverified and enters no rate. Confirming a removal that the machine made is a separate action in the console, because such a video goes straight to the Removed list, where the only other action is to restore it. Without the confirmation the removals that staff had reviewed would be those they reversed, and the false positive rate would be computed over reversals alone; with it, a confirmed removal is a true positive and stays in the denominator.

### 4.5.5 Roles and Permissions

Four roles divide the work (Table 4.5). Operators decide, auditors read the error rates and the log without being able to change a decision, and administrators assign roles and draw audit samples. The separation of operator and auditor is deliberate: the person who reads the error rates is not the person whose decisions produce them, so the monitoring does not depend on the monitored.

Table 4.5: Permissions of the four roles

| PERMISSION | ADMIN | OPERATOR | AUDITOR | USER |
|---|---|---|---|---|
| Approve or block a video, with a reason | yes | yes | – | – |
| Resolve an appeal | yes | yes | – | – |
| Label a video of an audit sample | yes | yes | – | – |
| Play a removed or held-back video | yes | yes | – | – |
| Draw a new audit sample | yes | – | – | – |
| Read the rates and the event log | yes | – | yes | – |
| See the owner's e-mail address in the queue | yes | – | – | – |
| Change a user's role | yes | – | – | – |
| Appeal the removal of one's own video | yes | yes | yes | yes |

Authorisation is expressed as permissions and not as role names, so that adding a role means editing one table. A role change is itself restricted: only an administrator may make it, nobody may change their own role, the last administrator cannot be demoted, and every change is appended to a log that the auditor can read.

### 4.5.6 Verifying the Owner of an Account

Registration checks that an e-mail address is well formed and nothing more, so anyone can register with an address that belongs to someone else. Two harms follow. The registrant can upload, the most expensive operation of the system, under another person's address, which makes uploads anonymous in practice. And when the real owner of the address later signs in with Google, the account is already taken by someone who knows its

password. The design therefore asks each new account to prove that it can receive mail at its address, and lets only verified accounts upload.

After registration the backend generates a random token of 32 bytes, stores only its SHA-256 hash with an expiry of 24 hours, and e-mails a link that carries the token itself, as is done for the tokens of a password reset. The link opens a page of the single page application, and that page sends the token in a POST request, so that a mail client that previews links by fetching them cannot verify the account by itself. The server consumes the token in one conditional update, so two clicks on the same link cannot both succeed. An account that has not verified its address can still browse, like and comment, but the upload endpoint refuses it with a distinct error code, which the interface turns into a reminder with a button that sends the link again, limited to five mails per hour for each account and, whoever asks, to five per hour for each recipient address.

Three events count as proof of ownership: following the link; signing in with Google, whose identity token carries an address that Google has verified; and completing a password reset, since the reset link also goes only to the mailbox. A Google sign-in whose address matches an unverified local account takes that account over. The password is removed, every token issued earlier is invalidated through the password-change timestamp, and any pending verification or reset token is deleted, so that whoever registered first cannot keep access. An account that is already verified is never merged automatically: its owner must sign in with the password and link Google from the settings page.

## 4.6 Interface Design

Figure 4.5 sets out the paths a user can take through the application, and it is worth reading before the component-level discussion that follows, because two of its properties constrain the design.

The first is that the catalogue and the watch page are reachable without an account. Browsing, searching, filtering by category and playing a public video all work for an anonymous visitor, and authentication is demanded only at the point where an action requires an identity, which in practice means uploading, commenting, reacting, or managing one's own channel. A visitor who reaches the upload page without a session is therefore diverted through sign-in or registration and returned to it, rather than being asked to sign in on arrival.

The second is that the upload path does not end where the user's involvement ends. Once the browser has transferred the file directly to Amazon S3, the interface returns

control immediately and the video enters the `PROCESSING` state, in which it is visible only to its owner on the channel management view. Only when the pipeline marks it `READY` does it join the public catalogue. The interface consequently has to represent a video that exists but cannot yet be played, which is why the state machine of Section 4.3 is modelled explicitly rather than inferred. The same holds after the pipeline has finished: a video that screening held back is visible to its owner and not in the catalogue until a person approves it.

The frontend is a single page application composed of functional React components with hooks, using React Context for authentication and theme state. Redux was considered unnecessary at this scale, since the shared state consists only of the current user and the selected theme.

The interface is available in Vietnamese and English, selected by a control in the header and remembered in the browser. One consequence of adding a second language is worth recording, because it constrains the data model rather than only the presentation layer. Video categories are stored in the database as Vietnamese strings, and the schema validates each new video against exactly those strings, so translating a category would have made both the catalogue filter and the upload form reject valid input. The display label and the stored value are therefore kept apart: the client renders a translated label while always sending the original value to the API. The same separation applies to messages the API returns, which are selected from the request's `Accept-Language` header rather than being fixed at the point where the error is raised.

The video player is implemented as a custom component rather than relying on the browser's native controls. The reason is that native controls cannot be extended: the browser renders its own separate menu for playback speed and picture-in-picture, which cannot be merged with the quality selector that HLS.js exposes. Presenting the user with two unrelated menus would be confusing, so the component reimplements play and pause, seeking, volume, fullscreen, playback speed, picture-in-picture, and rendition selection within a single settings menu.

The player also determines when a view is counted. Rather than incrementing the counter when the page loads, which would allow the count to be inflated by repeated refreshes, the component notifies the page only after playback has passed a threshold of several seconds, and the server additionally ignores repeated reports from the same viewer within a thirty-minute window and never counts the owner's own views.

The operations console is part of the same application, at its own address and reachable only by staff. Its tabs are the review queue, the removed videos, appeals, audit samples, the rates, the event log and the users, and a person sees only the tabs that the

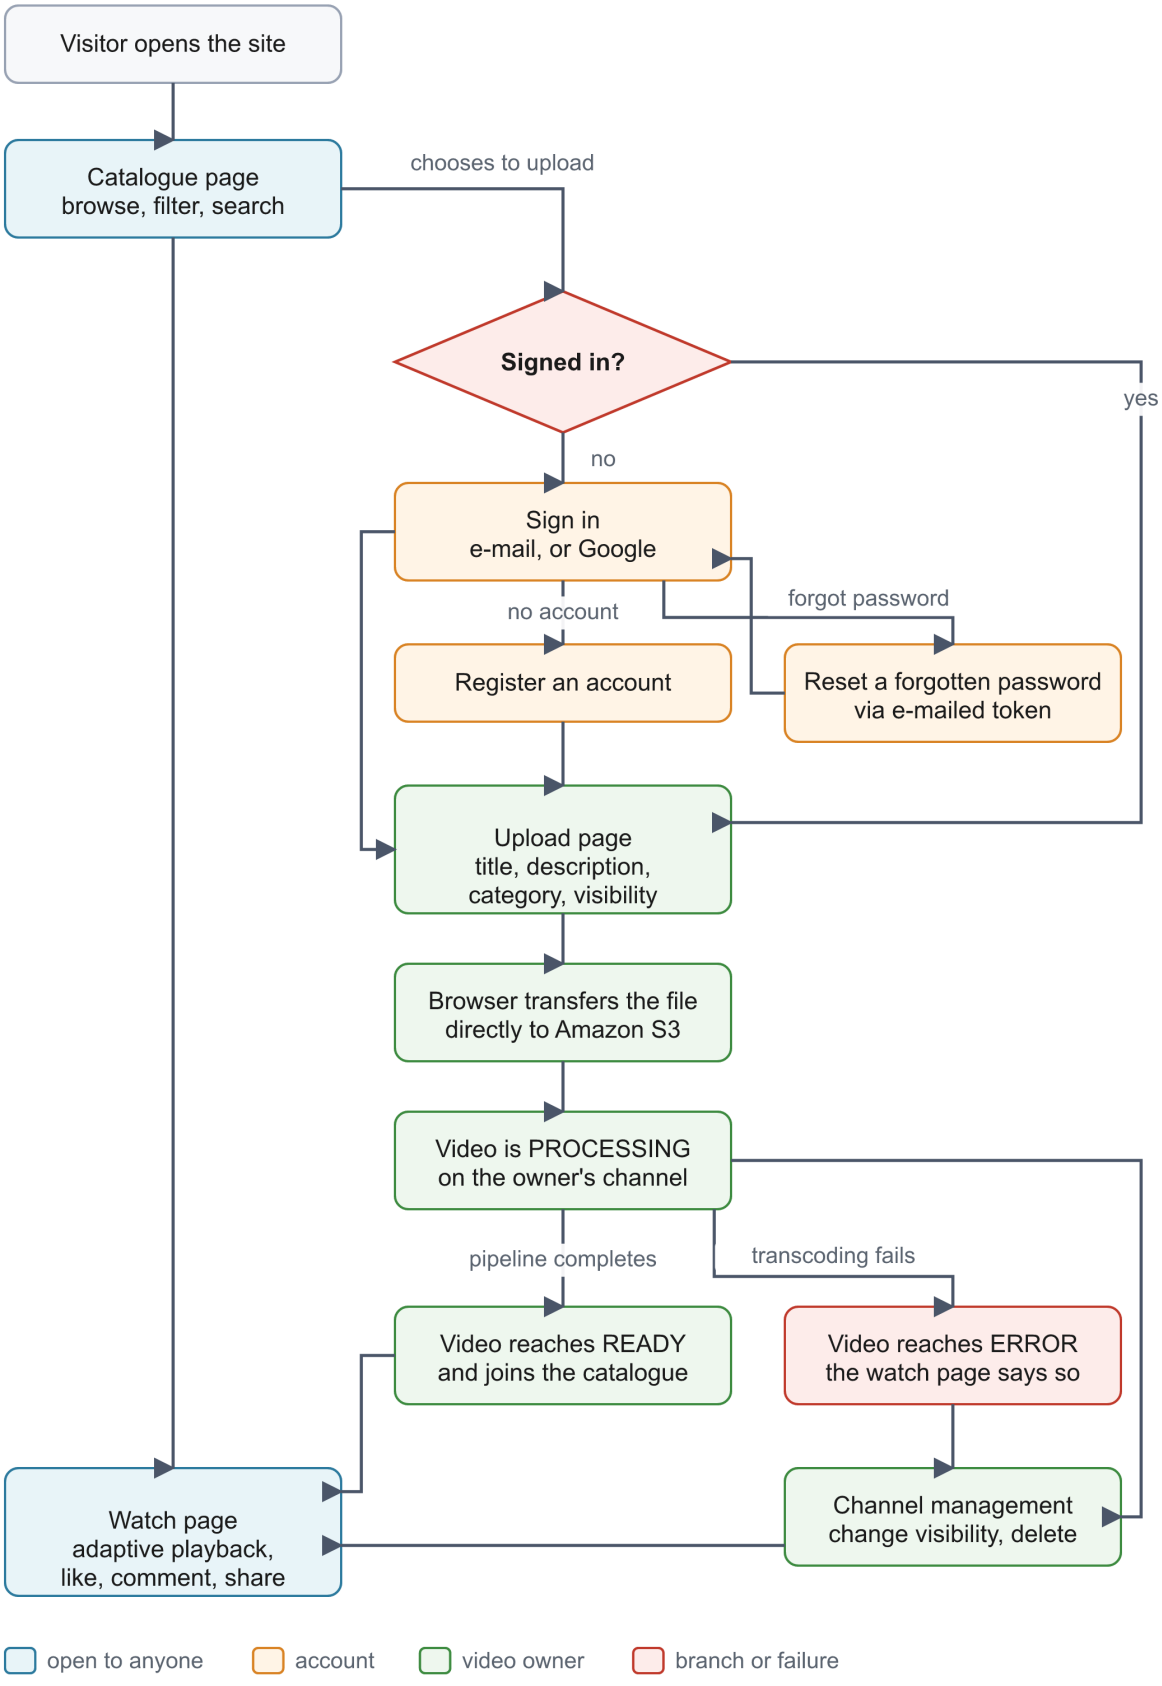



Figure 4.5: *User flow through the application, from an anonymous visit to a published video*

permissions of their role allow, so an operator never sees the rates and an auditor never sees a decision button. Thumbnails of videos under review are shown blurred until a reviewer chooses to reveal them, so that reading the queue does not by itself expose staff to the content.

# Chapter 5

# Development and Testing

## 5.1 Backend Implementation

The backend follows a layered structure in which routes delegate to controllers, controllers delegate to services, and only services interact with the data models. Business logic is kept out of route handlers so that it can be unit tested without an HTTP server.

Authorisation for video access is concentrated in a single service function. Every path that exposes a video, whether the detail endpoint, the like and comment endpoints, or the playback authorisation endpoint, calls that same function. This is a deliberate choice: duplicating the permission check across endpoints is the most common way for an access control gap to appear, because a later change updates one copy and not the others.

Operational authority follows the same principle. The four roles of the platform, user, operator, auditor and administrator, are mapped to permissions in a single table, and each route asks whether the requester holds a named permission, such as `moderation:review` or `metrics:read`, instead of comparing role names. Adding a role therefore means editing one table and not searching the code for comparisons. The requester's record, and with it the role, is read from the database on every request and is not copied into the token, so demoting a person takes effect at once and not when a token expires.

A decision is applied by one service function. It validates the reason code against the closed list for that decision, refuses to let an operator change a decision that an administrator made, copies the machine's verdict into `autoStatus` only if no earlier decision has done so, resolves the open reports on the video, dismissed on an approval and actioned on a removal, and then appends the event. The event is written after the decision has been applied. If writing it fails the decision stands and the failure is logged,

because withdrawing a removal on account of a faulty log would be the worse outcome; the false positive rate, the precision of the flag and the coverage are computed from the video documents themselves, so a missing event does not skew them.

The upload flow validates metadata on the server before issuing a pre-signed URL. Client-side validation alone is insufficient, since a user can call the API directly and obtain a URL for an arbitrary file, effectively turning the project's storage bucket into free hosting for unrelated content. The server therefore checks the declared MIME type against an allow-list of video formats and rejects files above the configured ceiling, which has a hard limit of 20 GiB in the source and is set to 20 GiB in the deployed system. Files up to 512 MiB go through a single pre-signed POST whose policy fixes the object key, the content type and the size range. Larger files use an S3 multipart upload in parts of 32 MiB: the backend signs one URL per part for exactly that part's length, so the storage service itself refuses a part of any other size, and on completion it lists the parts that S3 holds before asking for the object to be assembled.

Verification is a property of the account on which three places must agree: the guard of the upload route, the profile that the interface reads, and the takeover of an account by a Google sign-in. All three read it through one method of the user model, which treats an account with a Google identity as verified, and not through the stored field. The guard stands on the creation of the upload record, ahead of the upload rate limiter, so that a refused request does not use up the hourly quota; the later steps of a multipart upload need no guard of their own, because they act only on a record that the guarded step created.

Several protective measures were added at the HTTP layer. Security headers are applied through Helmet. Cross-origin requests are restricted to an explicit allow-list rather than being accepted from any origin, which is also a prerequisite for signed cookies to work, because the CORS specification forbids credentials in combination with a wildcard origin. Authentication endpoints are rate limited to ten attempts per fifteen minutes per address, which makes password guessing impractical without affecting legitimate users. Finally, the process validates its required environment variables at startup and refuses to start if the token signing secret is missing, converting a dangerous runtime failure into an immediate and obvious one.

A new password is checked in two stages, at registration, reset and change alike. The first runs locally: a short list of the passwords tried first, 131 of them and including common Vietnamese ones; obvious patterns, such as one repeated character, runs like `12345678` or `abcdefgh` and a short block repeated; a common base word followed by a few digits or symbols, or with letters swapped for digits; and the user's own name, the

start of their e-mail address and the name of the service. The second asks the Pwned Passwords service whether the password appears in a known breach, by the k-anonymity protocol [13]: only the first five hexadecimal characters of its SHA-1 hash leave the server, and the reply lists the suffixes that share them. A reply that takes more than two seconds, or fails, counts as no answer and lets the password through, so that registration does not depend on an outside service. Both stages apply only from eight characters, the length the user model already requires, and a refusal is a 400 response with the code `PASSWORD_TOO_COMMON`, `PASSWORD_PERSONAL` or `PASSWORD_BREACHED`, which the interface shows as a message. This follows the guidance that a verifier compare a new secret with commonly used, expected or compromised values and not impose composition rules [14].

The per-address limit on authentication does not stop one mailbox from being flooded, because an attacker who changes address is counted afresh while the mail still comes from the project's own account. A second limit therefore counts the mails sent to one recipient, under a hash of the normalised address, with one count shared by verification and reset mail: five per hour. Beyond it, registration still creates the account and skips the mail, the interface offering to send it again; a request to send the link again is refused with a 429 response before a new token is issued; and a reset request returns the same generic reply as every other outcome, so it still does not reveal which addresses have an account, and issues no new token.

## 5.2 Transcoder Implementation

The transcoder is a Node.js worker packaged with FFmpeg in a Docker image built through a multi-stage build. The base image went through two upgrades over the course of the project. Node 18 was used initially but had to be abandoned because Mongoose 9 depends on the Web Crypto API, which is not fully available in that version, causing the container to fail when connecting to MongoDB Atlas. Node 20 was then adopted, and later replaced with `node:24-slim` once Node 20 reached end-of-life on 30 April 2026 and stopped receiving security patches; Node 24 was chosen over the newer Node 26 because it is the current Active LTS release, supported until April 2028, whereas Node 26 had not yet entered its LTS phase at the time of the upgrade. The Alpine variant was avoided throughout because FFmpeg requires glibc.

The heartbeat mechanism described in Section 4.2 is, in effect, a lease in the sense introduced by Burrows for the Chubby lock service [15]: a holder retains a resource by periodically renewing it before a timeout expires, and Burrows already identified

the classical failure mode of that pattern: a lease can expire while its holder is merely stalled rather than dead, so a second holder may be granted the same resource while the first is still alive and will eventually act on it. A defect matching exactly this failure mode surfaced during a literature-driven review of the pipeline's reliability guarantees, discussed further in Section 5.6: neither `updateVideoReady` nor `updateVideoError` checked the video's current status before writing, so a duplicate job triggered by an SQS redelivery could silently overwrite a successful result, and in the worst case could revert an already-`READY` video back to `ERROR`. Both functions were changed to a conditional `findOneAndUpdate` that only writes when the current status is not already `READY`, and `processVideo` now checks the video's status before downloading anything, so a duplicate delivery that arrives after the first job has already finished is rejected immediately instead of re-downloading and re-transcoding the source.

A single FFmpeg invocation produces every rendition of the ladder that the source can fill, which is more efficient than separate invocations because the source is decoded only once. The ladder has six rungs, from 144p at 120 kbit/s to 1080p at 4 Mbit/s, and each rung fits the source inside its own frame without enlarging it: a 480p source yields a 360p rung and one at 854×480, not a 1080p rendition enlarged 2.25 times. Only the single-container path for a video longer than twenty minutes keeps the earlier three-rung ladder of 360p, 720p and 1080p, to stay within the time limit of a job. The command emits segments of six seconds, generates the per-rendition playlists, and the worker then writes the master playlist that lists the available bandwidths, codecs and resolutions. Those bandwidths and codec strings are derived from the encoded output rather than from the encoder settings: the bandwidth is the peak segment bit rate measured from the segments themselves, which Section 6.3.3 examines in detail, and the codec string is read out of each stream's sequence parameter set, since the constraint-set byte that RFC 6381 requires appears in neither the profile name nor the level number reported by a probe. A thumbnail is extracted in a separate pass.

The chunked path of Section 4.2.2 runs the same container image under four commands. The planner computes the chunk boundaries with functions that perform no input or output, so the arithmetic can be tested directly: a boundary is a whole number of groups of pictures counted in frames, and every chunk, the first included, writes its timestamps from the same base offset, so that the playlists of independently encoded chunks join without a gap or a repeated segment. A chunk job reads only its own range of the source over HTTP and encodes every rendition of the ladder for it. The finalizer joins the playlists and, as the single-container path does, measures the bandwidth of each rendition from the segments and not from the encoder settings. Chunk jobs are submitted

with a task size of their own, 4 vCPU and 8 GiB, because a four-vCPU task measured 14% faster and used 7% fewer vCPU-seconds than a one-vCPU task; the size is checked against the table of valid Fargate combinations when the configuration is loaded, since Batch would otherwise reject the submission only after the video had been marked as processing.

Content screening is one function that the single-container job and the finalizer both call, with the same policy and thresholds. It extracts the sampled frames with FFmpeg, sends them to Rekognition three at a time with retries and client-side rate limiting when the service throttles, applies the label policy of Section 4.5.1, and returns the verdict together with its evidence labels and the share of planned frames that could be analysed. A failure inside the step is converted into a flagged verdict that carries the error, so that the video waits for a person and is neither lost nor published. Screening is on unless `MODERATION_ENABLED` is explicitly set to false, so that a missing setting cannot silently publish every video.

Failure handling is deliberate. When FFmpeg exits with a non-zero status, the error propagates to the top-level handler, which records the `ERROR` status in the database and, in `worker` mode, does *not* delete the SQS message: leaving it in flight allows the visibility timeout to lapse so that the job is retried, and after the configured number of failed attempts the message is moved to the dead letter queue where it can be inspected rather than lost.

As Section 4.2 establishes, however, the deployed system runs `batch` mode, where the container holds no message to retain. The retry and dead-letter behaviour just described therefore governs only the Lambda that submits jobs, not the transcoding itself, and the recording of `ERROR` in the database is the sole part of this paragraph that applies to a deployed transcoding failure. The gap this left, and its consequences for how such failures were detected, is examined in Section 5.5.

## 5.3 Infrastructure as Code

The AWS environment is described by thirteen Terraform modules, summarised in Table 5.1, and is described by three environment definitions: `dev`, which hosts the deployed system; `staging`, a reduced copy used to test a branch before it is merged; and `prod`, a variant that uses On-Demand Fargate capacity, keeps logs for thirty days and does not force-destroy buckets. Only the first two have been applied: the state of `prod` does not exist, and its definition was checked with `terraform validate` and never deployed. The `dev` environment, which serves real users, carries the same protection

against a mistaken `terraform destroy`: its buckets and its registry cannot be force-deleted while they hold objects or images, and a deleted secret stays recoverable for seven days.

Table 5.1: Terraform modules and their responsibilities

| MODULE | RESPONSIBILITY |
|---|---|
| `s3` | Raw and processed buckets, CORS configuration, Glacier lifecycle transition, event notification |
| `sqs` | Transcode queue, dead letter queue with a redrive policy, queue access policy |
| `ecr` | Container registry with image scanning on push and a lifecycle policy retaining recent images |
| `iam` | Execution roles for AWS Batch, the ECS task, the transcoder task, and the Lambda submitter |
| `vpc` | Virtual network, public subnets, internet gateway, security groups, S3 gateway endpoint |
| `secrets` | AWS Secrets Manager entries for the database connection string and the token signing secret |
| `sns` | Notification topics for transcode completion and dead letter queue alerts |
| `monitoring` | CloudWatch log groups, alarms and dashboard, a scheduled health check of the public API, and a rule that alerts on failed Batch jobs |
| `batch` | Fargate Spot compute environment and an optional On-Demand one for overflow, the main and the lower-priority job queue, and the job definition |
| `lambda` | Job submitter function and its SQS event source mapping |
| `cloudfront` | Distribution, Origin Access Control, cache policy, and the trusted key group used for signed cookies |
| `backend-userdata` | Builds the start-up script of the backend instance from a single template, so that every environment runs the same script; creates no resources |
| `cloudflare-ips` | The IPv4 ranges from which Cloudflare reaches the origin, used to restrict the backend's security group; creates no resources |

Two configuration details are worth highlighting. The S3 lifecycle policy transitions raw source files to Glacier after thirty days, since they are never read again once transcoding has succeeded but must be retained in case a re-encode becomes necessary. The cache policy assigns a long time-to-live to segments, which are immutable once produced, and a short one to manifests, which may change if the set of renditions changes.

## 5.4 CI/CD Pipeline and DevSecOps

Seven GitHub Actions workflows automate verification and deployment, as shown in Figure 5.1.

The security gate is structured in two tiers, and the reason is practical. Scanning at the combined critical and high severity levels and failing the build on any finding sounds rigorous, but in practice most high-severity findings originate in transitive dependencies for which no patch yet exists. A gate configured that way fails continuously for reasons the team cannot act upon, and the predictable result is that developers begin ignoring it. The pipeline therefore reports critical and high findings for visibility without blocking, and blocks only on critical findings for which a fix is available. This keeps the gate meaningful, because a failure now always corresponds to an action the team can actually take.

Static application security testing is performed with `eslint-plugin-security` rather than SonarQube. The rule set detects patterns such as command execution built from user input, regular expressions vulnerable to catastrophic backtracking, and cryptographically unsafe random number generation. The choice avoids operating a separate analysis server while still executing genuinely within the pipeline. Where a finding is a false positive, it is suppressed with an inline annotation that documents why, which forces each suppression to be justified rather than silently ignored.

Infrastructure code is validated in its own workflow, which checks formatting, initialises without a remote backend so that no credentials are required, validates both environments, and scans the configuration for insecure settings.

A later audit of the pipeline found a weakness in its own supply chain. All five workflows referenced the vulnerability scanner as `aquasecurity/trivy-action@master`. A branch reference resolves to whatever that repository's default branch contains at the moment a job runs, so a change made there, including one made by someone who had compromised the action, would execute inside this project's continuous integration, which holds AWS credentials. Every other action in the pipeline was already pinned at least to a major version tag. The references are now pinned to a release commit hash, with the version tag retained in a comment so that upgrades remain deliberate and readable.

The same audit narrowed one permission. The Lambda that submits transcoding jobs held `batch:SubmitJob` on `Resource: "*"`, which allowed it to submit to any job queue in the account rather than the project's own. It is now scoped to the specific queue and job definition. The scoping is expressed through the naming convention rather than by referencing the Batch module's outputs, because the Batch module already depends

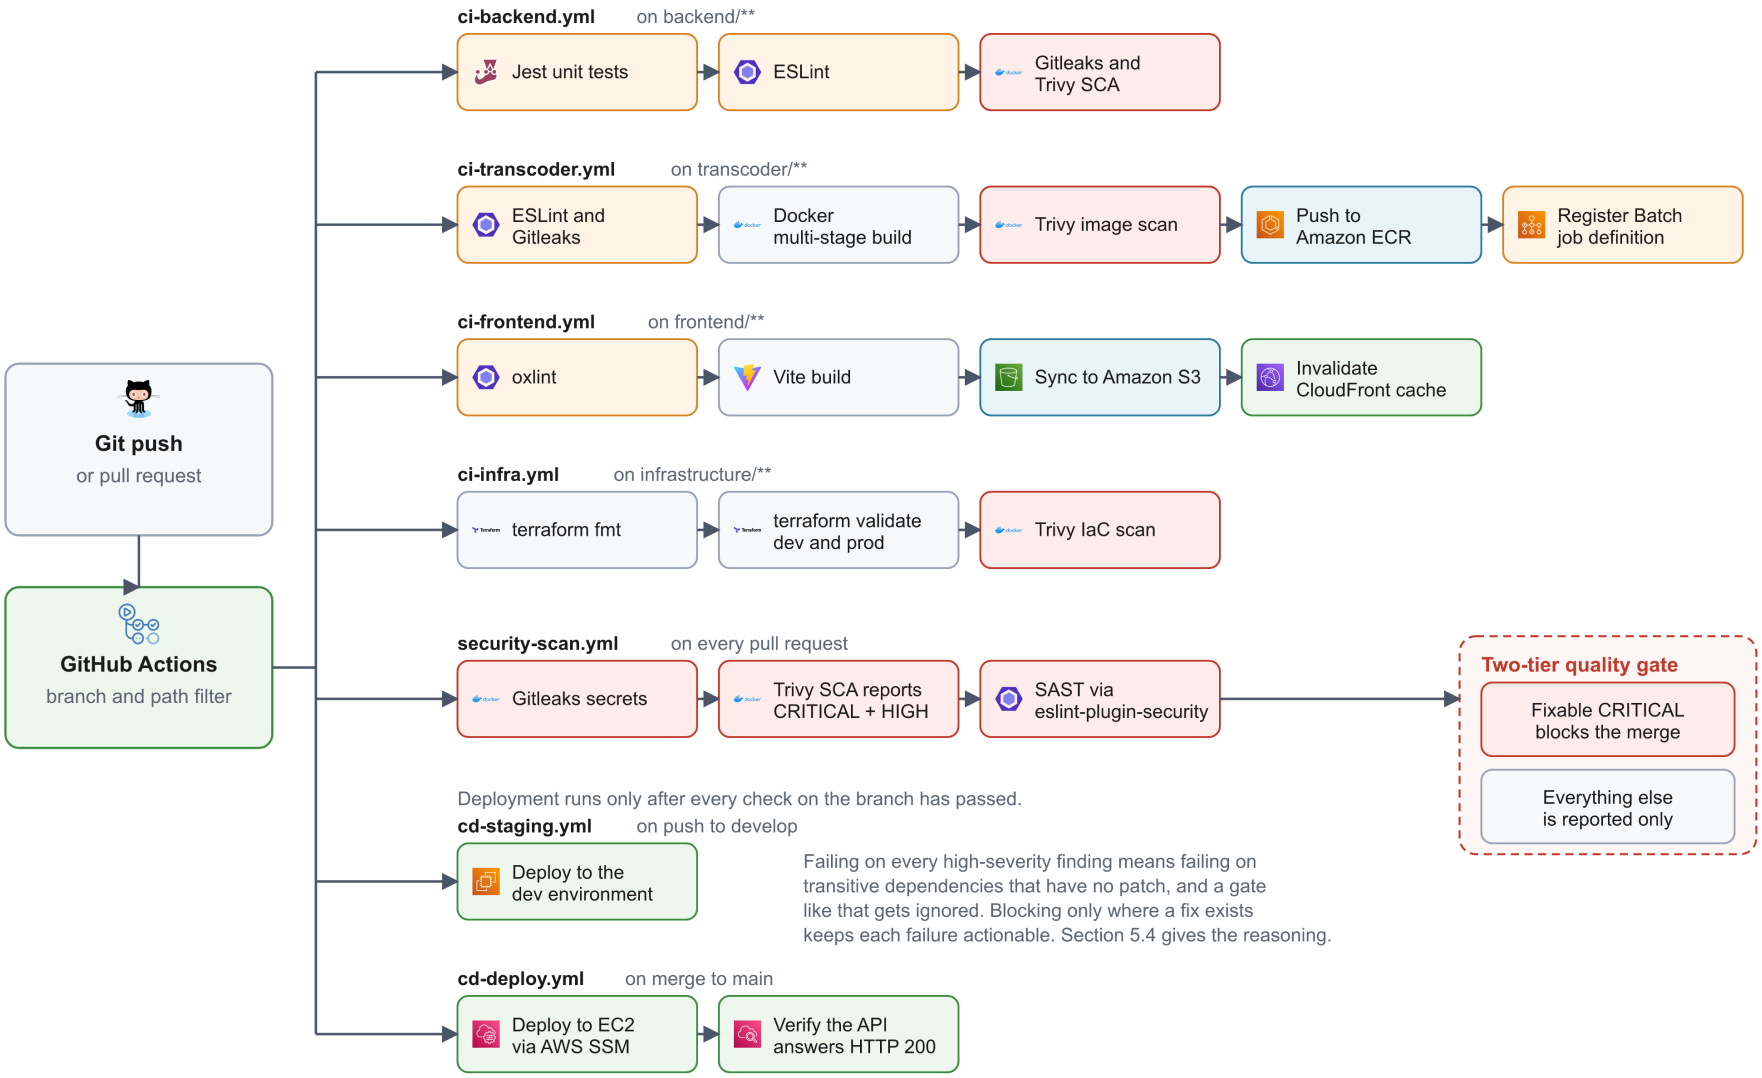



Figure 5.1: *The seven GitHub Actions workflows, the file paths that trigger each of them, and the two-tier DevSecOps quality gate*

on the IAM module for its roles and referring back would introduce a dependency cycle; both modules carry a note recording the coupling that this creates. The companion action `batch:DescribeJobs` keeps the wildcard, because it accepts arbitrary job identifiers and AWS provides no resource-level control for it, and the module records that reason in a comment so the wildcard is not mistaken for an oversight.

## 5.5 Challenges During Development

Several difficulties arose between a design that was correct on paper and a system that behaved correctly once deployed. Each is recorded here with the resolution adopted, because those resolutions shaped parts of the final architecture.

### 5.5.1 Provisioning Blocked by Account Policy

The content protection scheme of Section 4.4 was implemented and covered by unit tests well before it could be provisioned. Applying the Terraform configuration failed with an access-denied error, because AWS requires manual account verification before a new account may create CloudFront distributions, and the request filed to lift that restriction remained pending with no bound on how long it might take. Until it was resolved the processed-content bucket was reachable directly over the public internet, so the private visibility setting had no effect at the storage layer.

The restriction was worked around by provisioning the distribution in a second AWS account not subject to it. Terraform supports this without duplicating any module: the distribution, its Origin Access Control, its cache and response-header policies, and its Signed Cookie trusted key group were given an explicit `provider` argument pointing at the second account, while the buckets, Batch, Lambda and the database connection remained in the original one. Only the bucket policy could not move, since a bucket policy may be attached only by the account that owns the bucket. This required no special handling, because an Origin Access Control policy is expressed as a service principal together with an `AWS:SourceArn` condition naming the distribution, a form that is indifferent to which account owns the ARN. With the distribution in place, the temporary public bucket policy was removed and the bucket returned to being reachable only through CloudFront.

### 5.5.2 A Signed Cookie Policy That Matched Nothing

Exercising Signed Cookies against the new distribution revealed that every request returned `403 Forbidden`, whatever the video's visibility. The function building the resource pattern that a cookie authorises, `buildResourcePattern`, signed `videos/*/{videoId}/*`, with a wildcard segment between the prefix and the identifier, whereas the transcoder writes every rendition and the master playlist directly under `videos/{videoId}/`. Each cookie was therefore well formed and correctly signed, and authorised a resource that no viewer could request.

The existing unit test did not detect this because it compared the function's output against a literal string copied from the function itself rather than against the transcoder's key layout, so it could confirm only that the function had not changed. The pattern was corrected to `videos/{videoId}/*` and the test rewritten to assert against the layout the transcoder actually produces. Signed Cookies were then verified end to end against the deployed system: a manifest request without a valid cookie is rejected at the edge, and the identical request succeeds once the playback-authorisation endpoint has issued cookies for that video.

### 5.5.3 Two Consequences of Gating Every Object

Gating the whole bucket behind Signed Cookies also gated video thumbnails, which a catalogue listing must render for many videos at once even though a cookie authorises exactly one. A separate unsigned cache behaviour was carved out for the thumbnail path, since a thumbnail is not the content the mechanism exists to protect.

Separately, the frontend's own CloudFront distribution, added because an Amazon S3 website endpoint cannot return `200` for a single-page application's client-side routes on direct navigation, had no cache-invalidation step in its deployment workflow, so a fix already synced to the origin bucket continued to be served from the edge for hours afterwards. The workflow now invalidates that distribution immediately after every deployment.

### 5.5.4 Playback Across the Cookie Expiry Boundary

Signed Cookies are valid for two hours, and the watch page requested them once when it mounted. Crossing that boundary produced a `403` on the next segment, and the player's error handler responded to any fatal network error by calling `startLoad()` with no attempt counter and no delay, so an error that does not resolve on its own became an

unbounded retry loop behind a "reconnecting" message that never changed.

Two properties of hls.js governed the fix. The library marks the first `403` as non-fatal while it retries internally, so the handler must inspect the status code before filtering on the fatal flag, or it discards the very error it exists to report. And `startLoad()` resumes segment loading, whereas an expired cookie fails at the manifest, so recovery requires re-invoking `loadSource()`. The handler now refreshes the cookies on a `403`, reloads the source, and gives up after a bounded number of attempts with a message the viewer can act on.

### 5.5.5 An Empty Secret That Stopped the Pipeline

Every transcoding task began failing at `ResourceInitializationError` before its entrypoint ran. The Terraform module for Secrets Manager created the entry holding the notification e-mail password unconditionally but populated its value only when a password had been configured, so leaving e-mail unconfigured produced a secret with no version carrying the `AWSCURRENT` label. The Batch module decided whether to declare that secret in the job definition by testing whether its ARN was non-empty, and the ARN of an empty secret is non-empty. The fix made the secret itself conditional, so that the unconfigured state is internally consistent: no secret, an empty ARN, and no declaration in the job definition.

The defect persisted longer than it should have because the only jobs submitted while it was live belonged to the concurrency stress test, whose synthetic payloads were expected to fail. Checking the cause recorded in `statusReason` rather than the terminal state alone would have identified it immediately, and the alerting described next was changed to carry that field.

### 5.5.6 Retry and Alerting on the Deployed Path

Section 4.2 describes retry as delegated to SQS redelivery, which holds in `worker` mode. On the deployed path the Lambda submitter deletes the message once the job is submitted, so SQS no longer holds anything to redeliver, and the Batch job definition declared no `retryStrategy`. Nothing retried a failed job at any layer, and a transient fault such as a network error while downloading the source lost the video with no record beyond an `ERROR` row.

Detection had the same shape. The alarm whose description read "video transcoding failures detected" watched the depth of the dead letter queue, which receives a message only when the Lambda fails to submit, so a job that fails after submission is invisible to it.

The job definition now declares three attempts, retrying infrastructure faults and exiting immediately when the exit status indicates that FFmpeg rejected the content, together with a two-hour timeout that bounds a process stalled on malformed input. Because AWS Batch publishes no CloudWatch metric for failed jobs, an EventBridge rule matches job state transitions to `FAILED` and publishes to the alert topic, with the notification carrying `statusReason`. The alarm description was corrected to state what it genuinely covers.

### 5.5.7 Monitoring the Service Rather Than the Server

Both of the alarms defined at that point watched the transcoding pipeline, the dead letter queue and the queue depth, and neither watched the backend API, which runs as a single process on a single instance. The gap surfaced when assigning the backend a static address moved its public IP while DNS still pointed at the released one, and the API returned `522` for several minutes. Every infrastructure indicator stayed green, because nothing at the infrastructure level was wrong.

A scheduled function now calls the public domain every five minutes along the same path a viewer takes and publishes a metric that an alarm watches, with an instance status-check alarm alongside it. A self-hosted check was chosen over a managed one on cost, since a managed health check on an endpoint outside the provider costs roughly 1.75 USD per month against zero within the free tier, and the trade-off it accepts, that checks originate from a single location, is recorded with the implementation. The alarm's evaluation period is three times the check interval, so that each window holds several datapoints and one late execution cannot open a gap that the missing-data policy would read as a breach.

### 5.5.8 Infrastructure Drift in the Instance Definition

The AMI for the backend instance is resolved through a data source with `most_recent = true`, and the `ami` attribute forces replacement when it changes, so every Ubuntu security release armed the next `terraform apply` to destroy and rebuild the running server. What would have been lost is the state Terraform does not manage: the environment file holding the database URI, signing key and mail credentials, the nginx configuration, the TLS certificates, the process manager's state, and the public address that DNS points at. Changes to the attribute are now ignored, which makes an image upgrade deliberate, and an Elastic IP keeps the address stable across any rebuild that does occur.

## 5.6 Testing

The automated test suite comprises 853 tests across 52 suites, 492 in 35 suites for the backend and 361 in 17 for the transcoder, and Tables 5.2 and 5.3 group them by area.

Table 5.2: Automated backend tests by area, 492 tests in 35 suites

| AREA | TESTS | FOCUS |
|---|---|---|
| Authentication and account verification | 102 | Registration conflicts, login failures and token claims; the issue, expiry and single use of the verification link, which is stored only as a hash; the Google sign-in that takes over an unverified account; missing, malformed, forged and expired tokens, and tokens issued before the account's last password change; the password policy, which refuses common, personal and breached passwords and lets a password through when the breach lookup fails; and a reset response that is identical whether or not the address has an account, including when e-mail delivery fails |
| Visibility and authorisation | 34 | Privacy enforcement across every query path; that the recommendation endpoint reuses the rule of the detail endpoint and never surfaces a private or unlisted video; and that a video exposes how many likes and dislikes it has but not who gave them |
| Upload | 98 | Metadata and ownership checks, the refusal of an unverified account, the deletion cascade, pre-signed URL creation, file type and size validation, the ceiling and its hard limit, the choice between a single and a multipart upload, part URLs signed for exact sizes, completion by listing the stored parts, and the clean-up of abandoned uploads |
| Content delivery | 30 | Cookie signing, policy scope and cookie attributes, and that revocation repeats the attributes used when issuing |
| Listing, reactions and views | 31 | Pagination bounds, a stable sort order for channel pages, likes and dislikes as conditional updates, view deduplication, and the order of routes |
| Operation and reconciliation | 50 | Reconciliation of videos stuck in processing or abandoned in uploading, the client address behind Cloudflare and nginx, rate-limit keys, the cap on mail to one recipient with its sliding window and bounded memory, e-mail configuration, and the health endpoint |
| Moderation and operations console | 147 | Classification of each decision as a false positive, a false negative or neither; the snapshot of the machine's conclusion written once; the confirmation of a removal the machine made, logged as its own action and counted as a true positive; the permission table for the four roles; one appeal per decision; audit sampling and labelling; the Wilson interval and the rates; and that the last administrator cannot be demoted |

Table 5.3: Automated transcoder tests by area, 361 tests in 17 suites

| AREA | TESTS | FOCUS |
|---|---|---|
| Chunked pipeline | 184 | Chunk boundaries as multiples of the group of pictures counted in frames, the conditions that fall back to one container, command construction, playlist joining, submission to the lower-priority queue, task-size validation, and the planner, audio, chunk and finalizer jobs end to end |
| Ladder, frame rate and encode guard | 78 | Rung selection from the source resolution and the reduced ladder for long videos; that the group of pictures follows the real frame rate, that a variable-frame-rate file cannot poison it, and that every rendition cuts at the same instant; giving up early when a video cannot be encoded within the budget of a job; the thumbnail |
| Playlist metadata | 51 | That the declared bandwidth of each variant is the peak measured from the segments rather than a configured target, rounded upward as RFC 8216 requires, and that the codec string is read from the encoded stream and omitted rather than guessed |
| Persistence and delivery | 30 | Conditional writes that prevent a duplicate job from overwriting a result, object storage access, and the content of the READY and ERROR notifications, which never expose raw failure detail to the viewer |
| Content screening | 18 | The label policy including parent labels and the downgrade of animated content, the frame sampling plan, and holding back a video that could not be analysed fully |

The visibility suite is the most important from a security standpoint, since it asserts that a private video is absent from the public listing, returns a not-found response rather than a forbidden one to non-owners, and remains accessible to its owner. Returning not-found is deliberate: a forbidden response would confirm that a video with that identifier exists, which leaks information.

The value of testing was demonstrated concretely during development of the signing service. An initial implementation produced a canned policy, which the test suite immediately flagged because the resulting cookie set contained an expiry field instead of a policy field. Since canned policies do not support wildcard resources, that implementation would have failed for every video once deployed. The defect was caught before any infrastructure was provisioned.

Testing caught a second defect in a similar way, this time surfaced not by writing a test first but by a literature review of the reliability guarantees the pipeline was implicitly assuming (Section 5.2). Once the conditional-write fix was implemented, six tests were

written to pin down the exact contract: a normal write succeeds when the video is not yet `READY`; a write that loses the race to an earlier successful write is rejected and the function returns the winning record rather than throwing; and a late failure from a duplicate job can never revert an already-`READY` video to `ERROR`. As a falsifiability check, the same six tests were run against the original, unconditional implementation: four of the six failed, either because it never calls `findOneAndUpdate` at all or because it crashes outright when handed a plain record with no `save` method, which is exactly the shape a conditional read would have to return. The two that still passed were the not-found cases, which neither version distinguishes from a duplicate write. The result confirms both that the new tests are actually exercising the fixed code path and that the original implementation could not have satisfied the contract by construction, not merely by accident of the test data chosen.

# Chapter 6

# Deployment and Evaluation

## 6.1 The Deployed Environment

The system described in the preceding chapters runs as a live deployment, and every figure reported later in this chapter was measured against it rather than against a local approximation.

The application is reached at two hostnames. The single-page frontend is served from an Amazon S3 bucket through its own CloudFront distribution, and the backend API answers on a separate subdomain from a Node.js process on an Amazon EC2 instance, behind nginx for TLS termination and behind a process manager that restarts it on failure. Media is served from a third hostname belonging to the video distribution, whose origin is the processed-content bucket and which admits a request only when it carries a valid Signed Cookie. Cloudflare provides DNS and edge TLS in front of the two application hostnames. MongoDB Atlas holds the database, and the transcoding tier consists of the SQS queue, the Lambda submitter and the AWS Batch compute environment described in Chapter 5, none of which occupies any capacity between jobs.

A scheduled health check calls the public API domain every five minutes and publishes a metric that an alarm watches, so that the availability of the service, rather than of the instance hosting it, is what is monitored. Because the transcoding tier is billed only while a job runs, the instance is the only component that accrues cost continuously, and it can be stopped and restarted without losing the environment file, the TLS certificates or the public address, all of which survive by design.

## 6.2 User Interface Showcase

This section presents the interface as it appears to a user of the deployed system. The screens below are described in terms of what a user can do on each and how one leads to the next, rather than merely labelled.

Figure 6.1 shows the catalogue that a visitor reaches first. The header carries the search field, a theme toggle, and the sign-in and registration links, and directly beneath it a row of seven category tabs filters the listing without a page reload. Each card in the grid carries the thumbnail generated during transcoding, a duration badge in its corner, the title, the uploading channel with its avatar, the view count and the age of the upload. A visitor who is not signed in sees the same catalogue as a registered user, since public videos are readable without an account; the difference appears only when an action requires ownership or identity.

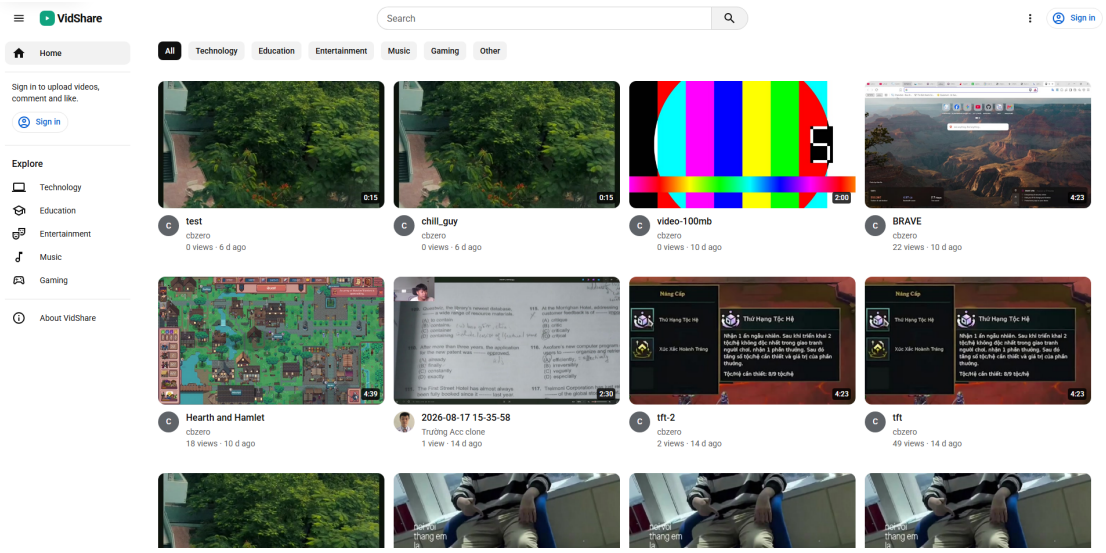



Figure 6.1: *Catalogue page, the entry point for a visitor*

Selecting a card opens the watch page in Figure 6.2. The player is a custom component rather than the browser's native controls, for the reason given in Section 4.6: the quality selector that HLS.js exposes cannot be merged into the browser's own menu, so play and pause, seeking with a timestamp tooltip that follows the cursor along the timeline, volume, fullscreen, playback speed, picture-in-picture and rendition selection are all reimplemented behind a custom control bar. The tooltip reports the time under the cursor alongside the video poster frame; it does not show the frame at that position, since the transcoder extracts a single thumbnail rather than the sprite sheet a frame-accurate preview would require. Before the stream can load, the page calls the playback-authorisation endpoint, which returns the Signed Cookies the content delivery network

requires; only then does the player fetch the master playlist. Below the player sit the title, view count and publication date, the like and dislike controls, a share control, the uploading channel, and the comment thread. To the right of the player area, a responsive sidebar displays recommended related videos filtered by category and author.

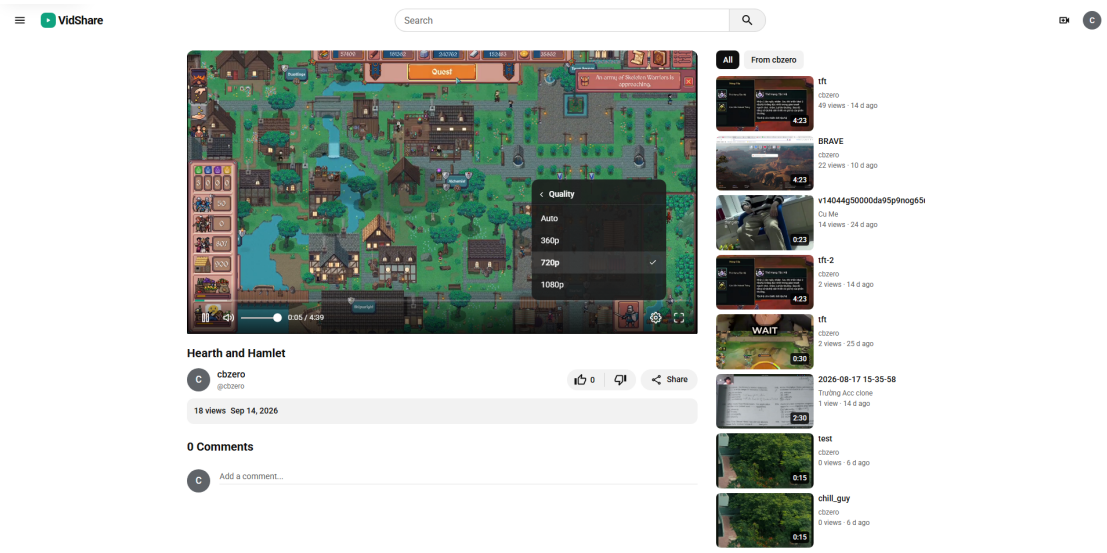



Figure 6.2: *Watch page with custom player, rendition selector and related videos sidebar*

Figure 6.3 shows the upload flow, which is where the architecture of Chapter 4 becomes visible to the user. The form collects the title, description, category and visibility, and on submission the browser receives a pre-signed URL and transfers the file directly to Amazon S3, so the progress indicator reflects a transfer that never passes through the backend. During upload, the interface displays live transfer telemetry including uploaded bytes, instantaneous transfer speed, and estimated time to completion (ETA), while providing a cancel button backed by an `AbortController` to abort the in-flight S3 PUT request immediately and asynchronously discard the draft `UPLOADING` database record to prevent orphaned records from accumulating. Once the transfer completes the page returns control immediately rather than waiting for transcoding, and the video appears on the uploader's channel in a processing state until the pipeline marks it ready.

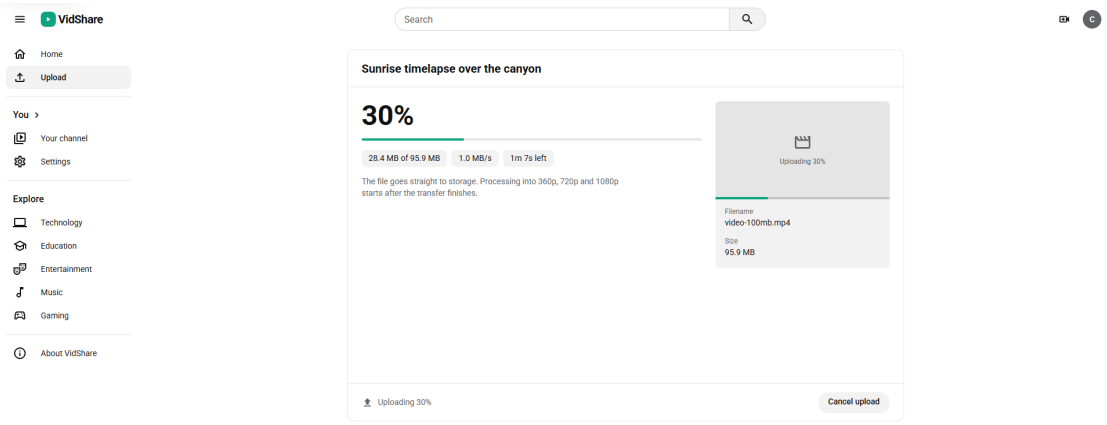



Figure 6.3: *Upload page, showing direct-to-storage transfer with live telemetry*

Figure 6.4 shows the channel management view, which lists the signed-in user's own videos regardless of visibility, together with the state of each. This is the only place a video in the `PROCESSING` or `ERROR` state is visible, since the public catalogue lists only videos that have reached `READY`, and it is where a video has its visibility changed (either directly via the actions menu or through a modal editing form that updates title, description, category, and visibility), or is deleted.

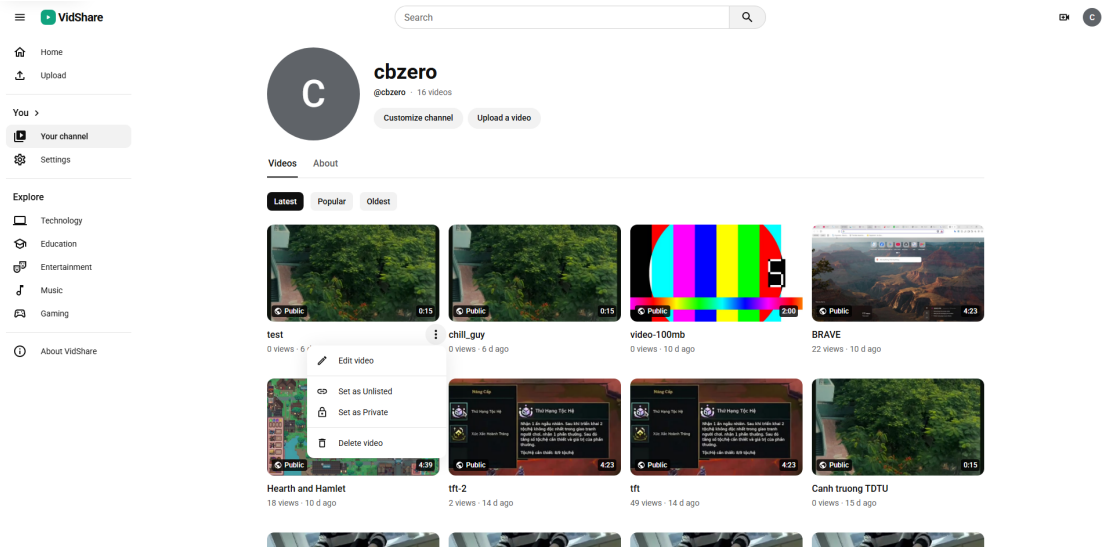



Figure 6.4: *Channel management view, including videos still being processed*

Staff reach the operations console of Figure 6.5 from the Moderation entry of the sidebar, which is shown only to the roles operator, auditor and administrator. Three counters stand above the tabs: the videos waiting for review, the open viewer reports, and the removed videos, the last with the number that the machine removed on its own.

The *Removed* tab lists each removed video with a blurred poster that is shown only on request, the labels the machine detected with their confidence and the time in the video at which each was found, and who removed it: the machine, or a named member of staff. Beside each video are the actions to watch it, to read the reports against it and to restore it; for a video that the machine removed and nobody has reviewed, a further button confirms the removal and records that the machine was right. The two videos in the figure are test uploads made for this purpose: one removed by an operator after a viewer report, and one deliberately violent clip that the machine removed on its own, with 98.9 per cent confidence for both Blood and Gore and Graphic Violence, and that an administrator then reviewed and kept removed.

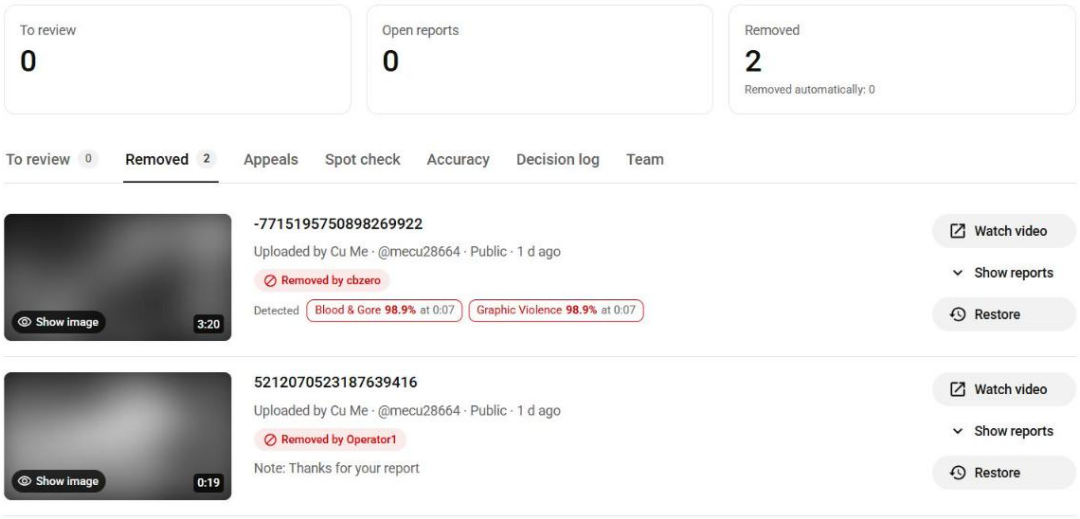



Figure 6.5: *Operations console, Removed tab, with the labels the machine detected and who removed each video*

Figure 6.6 shows the Accuracy tab, which administrators and auditors see. It gives four figures, each with its 95 per cent interval and the number of videos behind it: the share of automatic removals that were wrongly made, the share of flags that were right, the missed share estimated from the random sample, and the number of known misses, which is not a rate because the violations nobody has seen are not counted. With one removal reviewed, the interval for the wrongly removed share runs from 0.0 to 79.3 per cent, which is what an interval is for: the screen says that so small a sample tells little, and this is why the report makes no claim about the error rates of the screening on real traffic.

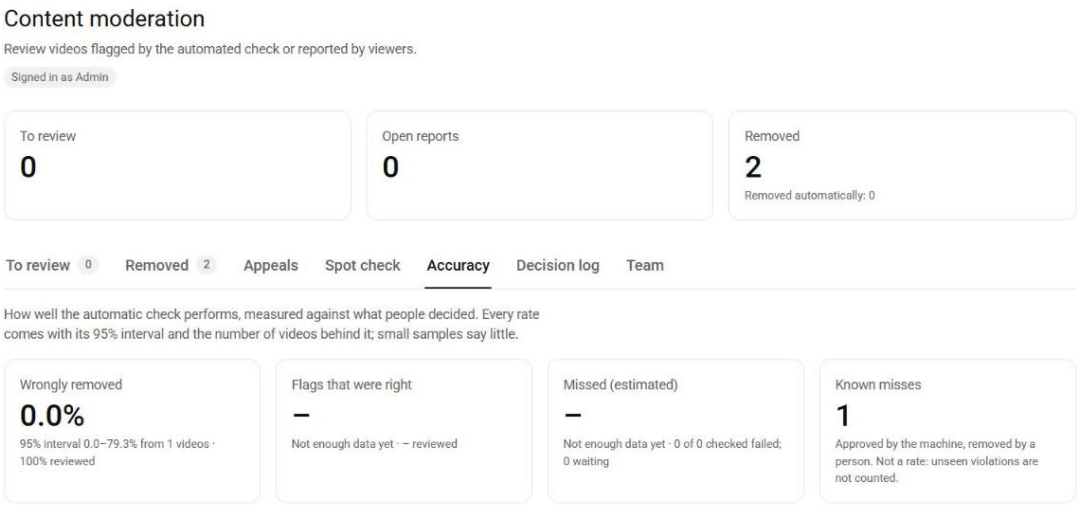



Figure 6.6: *Operations console, Accuracy tab, each rate shown with its interval and sample size*

## 6.3 Quality of Experience Evaluation

The playback measurements of this section were taken in September 2026, when the ladder had three rungs, 360p, 720p and 1080p; the ladder was extended to six rungs on 7 October 2026 (Section 5.2). The rungs named in its tables are those three, and the findings about declared and actual bandwidth do not depend on the number of rungs.

Time-to-First-Frame is measured by an instrumentation script that fetches the master playlist, parses it to locate a rendition playlist, fetches that playlist, and finally downloads the first media segment, recording the elapsed time for each stage. The measurement is repeated so that mean, median, and 95th percentile values can be reported, because a single sample is meaningless when network latency varies and the first request is typically an edge cache miss.

Measured against a video served directly from the S3 bucket, before the CloudFront distribution described in Section 5.5 was deployed, twenty samples gave a median Time-to-First-Frame of 251.52 ms. That is origin latency without any CDN, and it serves here as the baseline against which Section 6.3.1 compares the deployed system. The mean (292.93 ms) exceeds the median because one outlier sample (884.54 ms) inflates both the mean and the 95th percentile, which coincides with the single-sample maximum at this sample size. The statistics of each of the three stages are in Table B.1 (Appendix B).

### 6.3.1 Measuring the Deployed CDN, and a Configuration That Inverted It

Repeating the measurement against the live distribution required extending the instrumentation, since every request now requires a Signed Cookie: without one the script would have measured the latency of being refused. The script therefore requests cookies from the playback-authorisation endpoint and attaches them to all three stages, exactly as a browser does.

The first run produced a result that contradicted the entire justification for using a content delivery network. Against the CDN the median TTFF was 727.69 ms, against 251.52 ms measured directly from S3. The CDN was slower than the origin it was meant to accelerate, by a factor of 2.9. Caching was not the problem: nineteen of twenty samples were edge hits, and the single miss (4655 ms) was six times slower than the hits, so the cache was working precisely as intended.

The cause was visible in a response header rather than in any timing. Every request reported `X-Amz-Cf-Pop: MRS53`, the edge location in Marseille, France, and the frontend distribution was answering from Tel Aviv. Both distributions were configured with `PriceClass_100`, annotated in the Terraform as the cheapest option, which restricts delivery to edge locations in North America and Europe. Every request from Vietnam, where the system's users are, was therefore crossing to Europe and back. The setting did reduce the per-gigabyte rate, and in doing so it removed the entire benefit the component exists to provide for the only population that uses it.

Changing both distributions to `PriceClass_200`, which includes the Asian edge locations, moved delivery to `SGN50` in Ho Chi Minh City and produced the result in Figure 6.7.

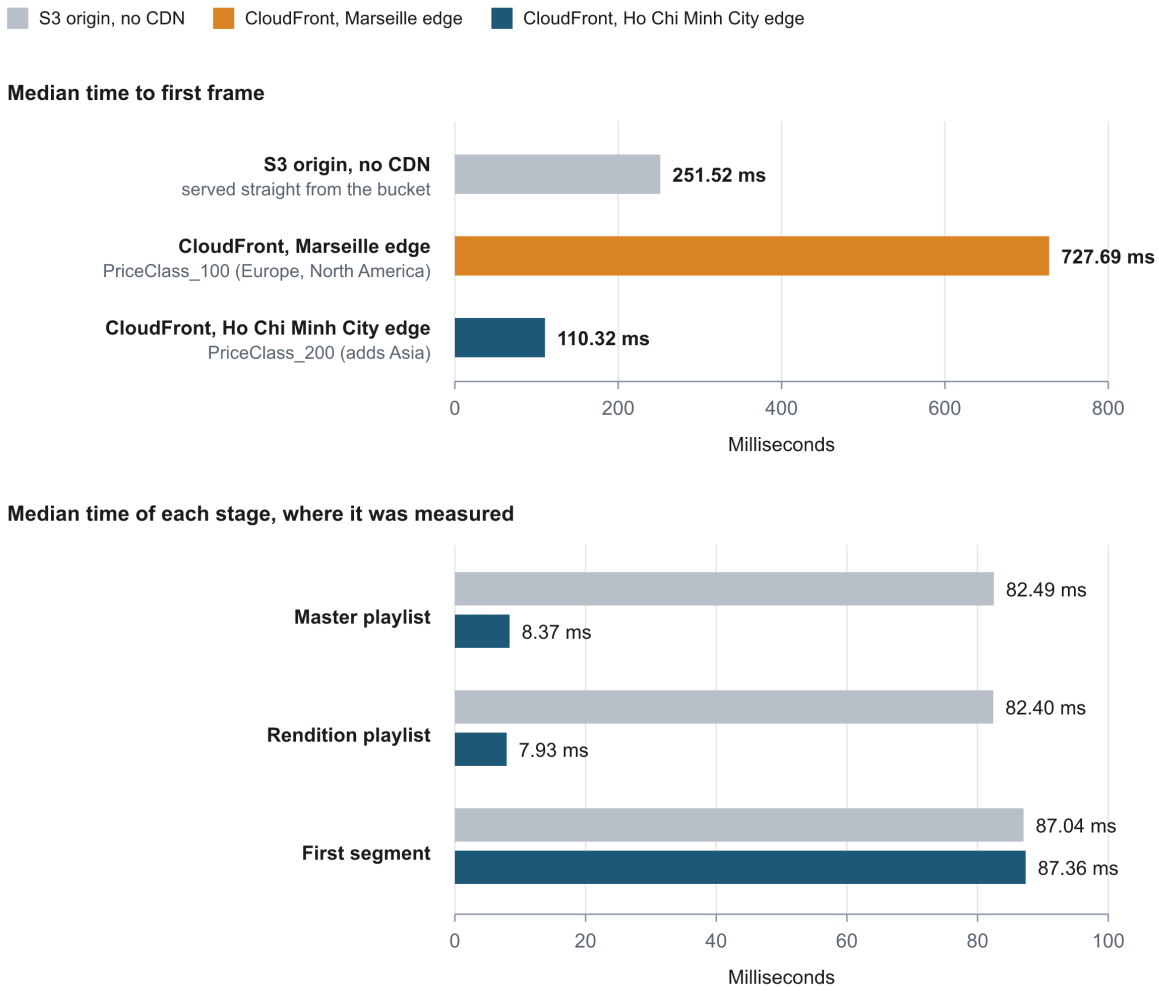



Figure 6.7: *Median time to first frame in three delivery configurations, and the median of each stage where it was measured*

*Note: $n = 20$ samples per configuration, with Signed Cookies attached to the two CloudFront ones. Of the twenty samples through the Ho Chi Minh City edge, eighteen hit the cache at all three stages and two missed; the median of those eighteen is 107.57 ms. The 727.69 ms figure is the median recorded when the fault was found: the file holding that run was overwritten by the measurement taken after the correction, so the time of each of its stages is not shown. The mean, 95th percentile, minimum and maximum of every stage are in Table B.2 (Appendix B).*

The comparison against the two earlier figures is stark. The median falls from 727.69 ms through the European edge to 110.32 ms through the local one, a factor of 6.6, and now sits 2.3 times faster than the S3 origin baseline rather than 2.9 times slower. The stage breakdown shows where the gain lands: the manifest and rendition playlists, small files served from cache, now complete in single-digit milliseconds, while the segment continues to dominate because it is the only stage transferring a meaningful payload.

Two properties of this defect are worth noting for the measurement methodology. It was invisible to every form of inspection short of measurement from the right place: the infrastructure code was valid, the distribution was healthy, the cache hit rate was excellent, and each individual request succeeded, so a measurement taken from Europe or North America would have shown the CDN performing well. And the original setting was a deliberate, documented cost optimisation that was correct about cost; what it did not account for was the geography of the traffic it governed.

### 6.3.2 Delivery Latency by Client Location

Since a single vantage point was what concealed the fault above, the measurement was repeated from five. The same three-stage probe, with Signed Cookies attached, was deployed as an AWS Lambda function to five regions, invoked for twenty iterations each, and deleted afterwards. Placing the client inside AWS regions makes the comparison between locations clean, because the only variable that changes is geography; the caveat this introduces is discussed below. Figure 6.8 reports the results.

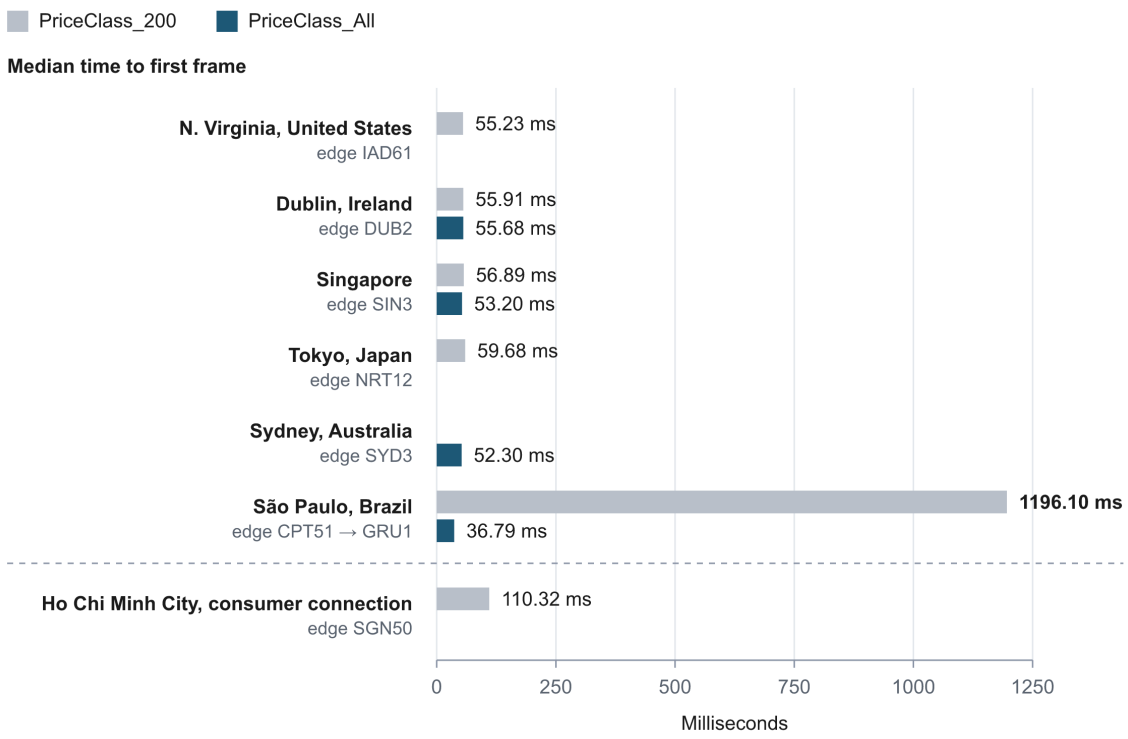



Figure 6.8: *Median time to first frame by client location, before and after* `PriceClass_All`

*Note: values in milliseconds, n = 20 per location and per configuration. A location has a single bar where it was measured in only one configuration: the first run predated the Sydney probe, and the second re-measured only the two locations that could change plus*

*two controls. The Ho Chi Minh City bar is the local measurement of Figure 6.7, taken from a consumer connection rather than from inside an AWS region, and is included for comparison rather than as a like-for-like sample. The median over the samples that hit the edge cache at all three stages is in Table B.3 (Appendix B).*

Under `PriceClass_200`, four of the five locations were indistinguishable, clustering between 55 and 60 ms and each served by an edge in its own region. That uniformity is the property a content delivery network is expected to provide, and it corroborates the price class correction more strongly than the single improved figure from Vietnam had.

São Paulo was the exception. Requests from Brazil were served by `CPT51` in Cape Town, South Africa, across the South Atlantic, at a median of 1196 ms, twenty-one times the latency of every other location and considerably worse than the 728 ms that prompted the correction in the first place. The cause was the same mechanism: `PriceClass_200` includes Asia, India, the Middle East and Africa, but excludes South America and Oceania, so a Brazilian viewer occupied exactly the position a Vietnamese viewer had occupied before. The correction had not eliminated the problem; it had moved the excluded region to one where this system happens to have no users.

Both distributions were therefore moved to `PriceClass_All`, which excludes nothing, and the affected locations were re-measured. Brazil is now served by `GRU1` in São Paulo itself at a median of 36.79 ms, a thirty-two-fold improvement and the fastest value measured; Sydney, the other previously excluded region, is served by `SYD3` at 52.30 ms. The two control locations moved by less than 4 ms, confirming that nothing else changed. Delivery is now uniform across every location measured.

The basis for that decision is narrower than the numbers alone suggest. The system has no users in South America or Oceania, so the change did not meet an existing need. It was adopted because the difference in cost is zero in practice: CloudFront's perpetual free tier covers one terabyte of transfer and ten million requests per month, well above anything this deployment approaches. With no cost to weigh against it, there is no reason to retain a region served an order of magnitude worse. Were traffic ever to exceed that allowance, this is the first setting that should be revisited, since South America and Oceania carry the highest per-gigabyte rates in the schedule.

One methodological limit applies to every bar. These probes ran inside AWS regions, reaching edges over well-provisioned network paths, which is why four of them report around 55 ms while the consumer connection in Ho Chi Minh City reports 110 ms to an edge in the same city. The figures therefore measure edge proximity under favourable conditions, not what a residential viewer in each location would experience; the last-mile difference is roughly a factor of two on this evidence. Within that limit, the measurement

establishes what a single vantage point could not: delivery is uniform wherever the price class reaches, and an order of magnitude worse where it does not.

### 6.3.3 Playback Under Constrained Bandwidth, and a Manifest That Understated Itself

The Time-to-First-Frame figures above were produced by a script built on `fetch`, and that construction places three quantities permanently out of its reach. Rebuffering ratio, bitrate switch count, and the bitrate a viewer actually receives do not exist unless something is playing: they require a buffer, a playback clock, and an adaptive bitrate algorithm, none of which a sequence of HTTP requests possesses. Measuring them therefore required driving the real player rather than simulating it.

The harness written for this purpose launches headless Chromium under Playwright, loads the deployed watch page, and takes its signals from the <video> element itself: the `waiting`, `playing`, and `ended` events for stalls, and the `resize` event for the rendition currently on screen. No production code was modified to accommodate the measurement. Bandwidth is capped through the Chrome DevTools Protocol, which is why the harness is fixed to Chromium. Three definitional choices matter when reading the numbers. Startup buffering is excluded from the rebuffering ratio, because waiting for a video to begin is an ordinary expectation while a mid-playback freeze is not, and conflating them inflates every figure. The initial rendition selection is not counted as a switch, since counting it would add exactly one spurious switch to every measurement. The average bitrate is weighted by the time each rendition was displayed, because playing 1080p for one second and 360p for fifty-nine and then averaging the two rungs describes nothing a viewer experienced.

Each profile discards two warm-up runs before recording five. One proved insufficient, and this was measured rather than assumed: on the slow 3G profile with a single warm-up, the first recorded run showed a startup delay of 26.04 s against roughly 1.90 s for the remaining four, and a second warm-up removed the outlier entirely. The effect is invisible on a fast connection, so testing only the unthrottled profile would have concealed it.

Table 6.1: Playback quality by emulated network profile

| METRIC | UNTHROTTLED | FAST 3G | SLOW 3G |
|---|---|---|---|
| Startup delay, median (s) | 2.576 | 2.076 | 3.803 |
| Startup delay, max (s) | 5.221 | 2.389 | 3.920 |
| Rebuffering ratio, median | 0.00% | 0.00% | 5.72% |
| Rebuffering ratio, mean | 0.00% | 1.20% | 6.49% |
| Rebuffering ratio, max | 0.00% | 5.99% | 14.83% |
| Runs exhibiting a stall | 0/5 | 1/5 | 3/5 |
| Bitrate switches, median | 1 | 4 | 5 |
| Average bitrate (kbit/s) | 1833 | 1551 | 1200 |

*Note: five recorded runs per profile after two discarded warm-up runs, 120 s of playback each, against a single 4:23 source. Emulated ceilings are 1678 kbit/s for fast 3G and 512 kbit/s for slow 3G. The rebuffering ratio is reported as median, mean, and maximum together because stalls are rare but severe: on slow 3G the median alone is 5.72% while two runs exceeded 11%, and on fast 3G the median is 0.00% while one run reached 5.99%. Reporting the median in isolation would have rendered fast 3G as "no rebuffering", which the underlying runs contradict.*

Producing these figures required deciding what the received bitrate actually is, and that question exposed a defect. The obvious source is the `BANDWIDTH` attribute of each `EXT-X-STREAM-INF` entry, but the routine that writes the master playlist was emitting that value as the sum of two target constants from its configuration, never inspecting what the encoder had produced. RFC 8216 Section 4.3.4.2 is normative on this point and states that the value "represents the peak segment bit rate of the Variant Stream", adding that where the media segments already exist the value *MUST* be derived from them. The segments do exist by the time the function runs, so the condition is satisfied and the requirement binding.

What the encoder actually produced was therefore measured directly: the size of every segment of every rendition was taken from the processed bucket and divided by that segment's own duration, read from the corresponding `#EXTINF` tag rather than assumed to be the nominal six seconds, since the final segment of each rendition is shorter and assuming otherwise would depress every figure.

Table 6.2: Declared against actual bitrate for each rendition

| RENDITION | DECLARED | PEAK | MEAN | SHORTFALL |
|---|---|---|---|---|
| 360p | 464 | 637 | 514 | 37% |
| 720p | 1628 | 2148 | 1714 | 32% |
| 1080p | 4192 | 5390 | 4338 | 29% |

*Note: kbit/s; n = 44 segments per rendition. The shortfall column expresses how far the declared value falls below the actual peak.*

The direction of the error is what makes it consequential. Because hls.js consults `BANDWIDTH` when judging whether a rendition fits the throughput it has measured, a value below the true peak invites the player to select a level the connection cannot sustain. The fast 3G profile sits precisely on that boundary: its 1678 kbit/s ceiling admits the declared 1628, and excludes the actual 1701. The prior measurement round showed the predicted consequence, with two of five runs stalling and one requiring 16.81 s to reach the first frame after eight rendition switches.

The correction computes `BANDWIDTH` from the segments themselves, taking the peak and rounding upward, since rounding down would return the declared figure to below the true value and reproduce the defect in miniature. Existing videos were repaired in place by rewriting the master playlist alone, since re-transcoding would have generated new segments and destroyed the comparison the experiment depends upon. The rendition ladder itself is unchanged.

Table 6.3: Playback quality before and after the manifest correction

| PROFILE | REBUFFERING | STALLED | STARTUP MAX | BITRATE |
|---|---|---|---|---|
| Unthrottled | 0.00% → 0.00% | 0/5 → 0/5 | 3.29 → 5.22 | 1833 → 1833 |
| Fast 3G | 2.48% → 1.20% | 2/5 → 1/5 | 16.81 → 2.39 | 1823 → 1551 |
| Slow 3G | 6.49% → 6.49% | 3/5 → 3/5 | 3.83 → 3.92 | 1236 → 1200 |

*Note: rebuffering is the mean across five runs, startup maximum in seconds, and average bitrate in kbit/s. Both rounds used identical parameters, and the only attribute altered between them was `BANDWIDTH`; the manifests carried no `CODECS` attribute in either round, that being added afterwards.*

The correction helps in exactly one of the three conditions, and the pattern is more informative than the improvement. On fast 3G the worst-case startup delay falls from 16.81 s to 2.39 s, the whole distribution narrowing to between 2.03 and 2.39 s, while mean rebuffering halves and the number of affected runs drops from two to one. This gain is not free: the average bitrate falls by 15% and the median switch count rises from one to four, the player now adapting continuously instead of settling on a level it could not carry. Trading picture quality for continuity is a genuine trade-off and is reported here as one.

The unthrottled profile is unchanged, and serves as a control. Where bandwidth is ample the declared value constrains nothing, so a correct manifest should make no difference, and none is observed; the apparent worsening of the startup maximum from

3.29 to 5.22 s reflects a single slow run within ordinary variation, with rebuffering at zero in both rounds.

Slow 3G is unchanged for a different and more instructive reason. Its five runs reproduced the prior round to within 0.02 percentage points, mean rebuffering landing on 6.49% in both, which attests to the repeatability of the harness while confirming the correction had no effect. The explanation is that a manifest can only mislead a player that has a choice to make. At a 512 kbit/s ceiling even the lowest rung, whose actual peak is 637 kbit/s, exceeds the connection, and since hls.js cannot descend below the bottom of the ladder its behaviour is identical whatever the manifest declares. No manifest correction can address this condition; the remedy would be a lower rung or a cheaper 360p encode, which is recorded as future work rather than attempted here.

Three limitations qualify the whole of this evaluation. The average bitrate is computed from the bytes actually transferred rather than from the declared attribute, which is why it remains valid across the correction; the harness derives it by summing segment sizes and dividing by the summed `#EXTINF` durations of those same segments. The peak the harness observes is a lower bound on the true peak, since it sees only segments the player chose to fetch, so exceeding the declared value proves a violation while remaining below it proves nothing. Finally the profiles were executed in sequence, leaving edge cache state confounded with profile order for the startup delay figures specifically, which is the likeliest explanation for fast 3G showing a lower median startup than the unthrottled profile in both rounds. The harness also exports its event log in the input format of the ITU-T P.1203 model, Mode 0; it does not compute a MOS score, and no such score is claimed here, since obtaining one requires the public reference implementation of that model.

### 6.3.4 Whether Content Complexity Governs the Result

Every figure reported above rests on a single source video, and one sample cannot separate a property of the system from a property of that recording. A screen capture of a mostly static browser window and a recording of a busy game scene make very different demands of an encoder, and if the preceding measurements merely describe how this system handles one particular file they generalise to nothing. Settling that question required varying the attribute that plausibly governs the outcome.

That attribute is visual complexity rather than duration. Duration need only exceed the measurement window; past that threshold a longer file consumes transcoding time without contributing information. Complexity determines how many bits the content

genuinely requires, and therefore whether the rungs of the ladder separate or collapse together.

Complexity was measured rather than inferred from genre, since a static shot inside an action film is still a static shot. Each candidate was encoded at a constant quality target, sixty seconds taken from the thirty-second mark at CRF 23, and the resulting bitrate read as the measure: at constant quality the encoder holds picture fidelity and allows bitrate to follow the content, so the figure reports complexity directly. Three sources were selected on that basis and are named low, medium, and high below. They measured 151, 405, and 2298 kbit/s, a spread of 15.2× end to end with adjacent ratios of 2.7× and 5.7×.

Each source was run against all three network profiles before the next source began, so that the three profiles of every source encounter the same ordering and its effect cancels when sources are compared. Order does not cancel between the profiles of a single source, exactly as in the single-source measurement.

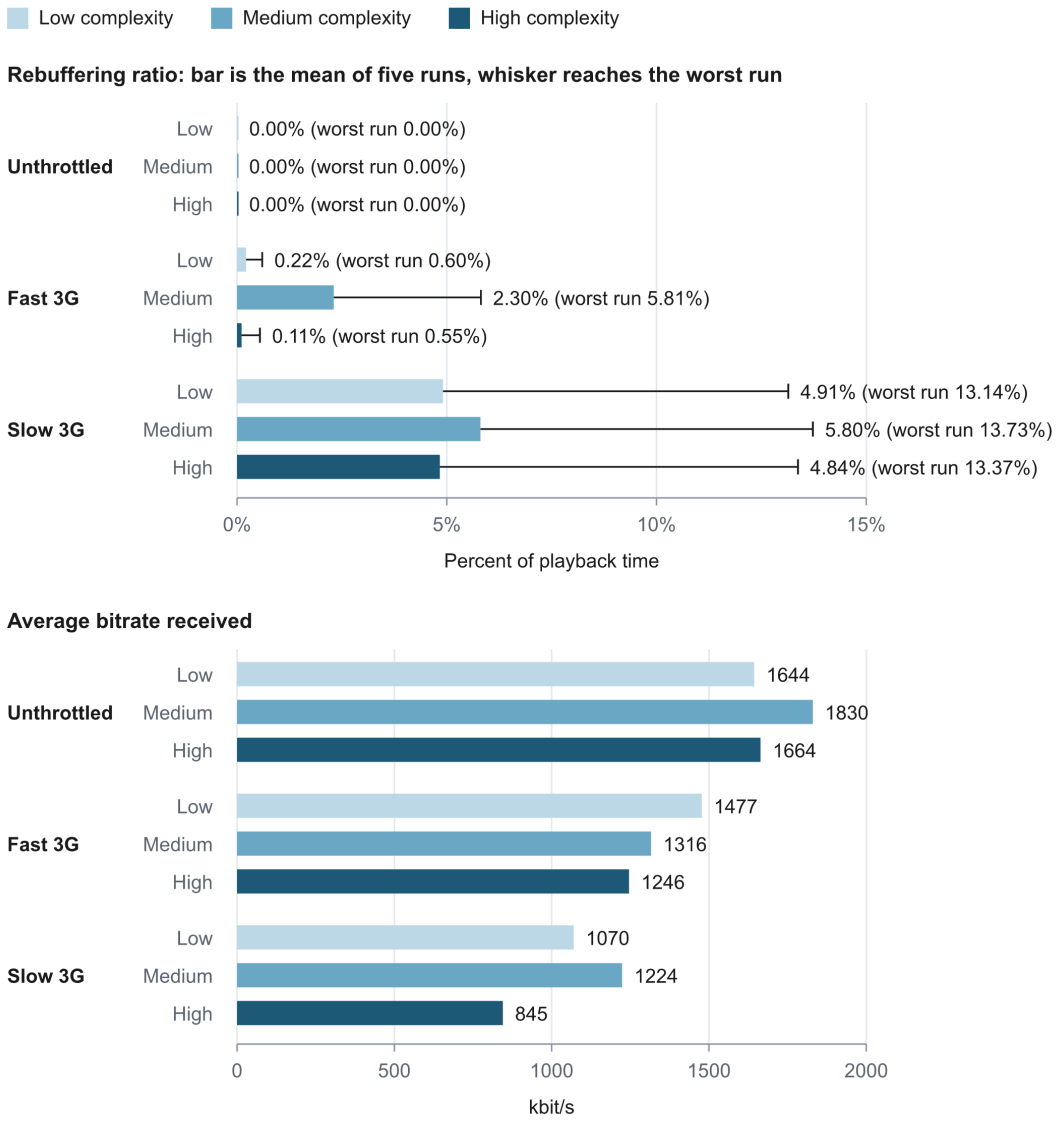



Figure 6.9: *Rebuffering ratio and average bitrate for three sources of differing visual complexity under three network profiles*

*Note: five recorded runs per combination after two discarded warm-up runs, 120 s of playback each, at a device pixel ratio of one. Source durations are 4:23, 4:23, and 4:40, all longer than the measurement window. The number of runs that stalled and the median startup delay are in Table B.4 (Appendix B).*

Figure 6.9 gives the result for the nine combinations, and complexity does not order it. Under fast 3G the mean rebuffering ratio runs 0.22%, 2.30%, and 0.11% across low, medium, and high, so the most demanding source is the least affected and the middle source the worst. Under slow 3G the three land within a single percentage point of one another, and under the unthrottled profile all three are identically zero. A fifteenfold difference in content complexity produces no corresponding ordering under any profile.

The explanation lies in the encoder configuration rather than in the measurement. The ladder targets fixed bitrates through average-bitrate mode, so the encoder spends its allotted budget whether the content requires it or not: the 720p rung averages 1650, 1694, and 1652 kbit/s for the three sources despite their raw complexity differing fifteenfold. Content is flattened at the point of encoding, and by the time playback occurs little remains for it to influence. The limitation recorded against the single-source measurement is therefore answered in the strongest form available, since adding sources leaves the result unchanged and that is now established by measurement rather than assumed.

A second finding emerged from the rendition ladder, and it governs how the unthrottled row of every table in this section must be read. The player configures hls.js with `capLevelToPlayerSize`, which restricts the selectable renditions to those needed to fill the video element, and hls.js scales that element's dimensions by the device pixel ratio before comparing. The watch page holds the player column at roughly 880 px on any display, because the layout caps the page at 1320 px and reserves 360 px for the sidebar. At a device pixel ratio of one the player therefore requires at most 1280×720, and the 1080p rung is unreachable: across all nine measurements above it received one segment in total. Contemporary laptops commonly report a ratio between 1.25 and 2, at which the same element is treated as 1320 to 1760 px wide and the 1080p rung is selected. The unthrottled row was consequently measured a second time at a ratio of two.

Table 6.4: Unthrottled playback at device pixel ratio one against two

| SOURCE | DPR 1 | DPR 2 | RUNGS, DPR 1 | RUNGS, DPR 2 |
|---|---|---|---|---|
| Low | 1644 | 4318 | 360p, 720p | 360p, 1080p |
| Medium | 1830 | 4312 | 360p, 720p | 360p, 1080p |
| High | 1664 | 4206 | 360p, 720p | 360p, 720p, 1080p |

*Note: average bitrate in kbit/s, measured over five recorded runs per cell. Rebuffering was 0.00% in every run of both configurations. The medium source additionally fetched a single 1080p segment at a ratio of one, which is treated here as unused.*

Average bitrate rises by a factor of 2.5 to 2.6 while rebuffering remains at zero and the median startup delay moves by at most 0.34 s. The unthrottled profile as measured at a ratio of one was therefore bounded by the resolution ceiling rather than by the network, and the delivery path sustains two and a half times the throughput without a single stall. Neither configuration exercises the whole ladder: at a ratio of one the 1080p rung is unreachable, while at a ratio of two the low and medium sources ascend directly from 360p to 1080p and bypass 720p entirely. The middle rung is thus seldom selected on an unconstrained connection, and serves principally on the fast 3G profile.

Raising the ceiling also closed a caveat carried by the earlier measurement. The peak bitrate the harness observes is a lower bound on the true peak, since it sees only the segments the player chose to fetch, so remaining below the declared value proves nothing. At a ratio of two the 1080p rung was fetched in quantity, and the observed peak matched the declared `BANDWIDTH` exactly for all three sources, at 4 601 399, 5 389 584, and 5 495 113 bit/s respectively. Two computations performed independently, one by the packager from segment sizes in the processed bucket and the other by the harness from bytes received over the network, agree to the bit. The declared value is therefore attained by a real segment rather than overstated, although the harness still cannot exclude a heavier segment among those it never fetched.

Two limitations attach to this comparison specifically. The 120 s window covers approximately the first twenty of the forty-four segments of each source, so statements about peak bitrate concern the opening of each file rather than the whole of it. And variance under fast 3G was markedly higher than under either neighbouring profile: two of the three sources produced a bimodal startup distribution, clustering near 1.2 s and again near 7.5 s, while the third remained uniform at 1.1 s. Fast 3G is the only profile whose ceiling falls between two rungs rather than above all of them or below all of them, which would place the adaptation algorithm at a decision boundary, but the third source contradicts that account and the cause was not established here.

## 6.4 Transcoding Pipeline Performance

Pipeline latency is measured from the completion of the upload to the moment the record reaches the `READY` state, which corresponds to the interval a user actually waits. This interval encompasses the S3 event delay, the time spent queued in SQS, container startup on Fargate, FFmpeg execution, and the upload of results.

The measurements of this section predate both the six-rung ladder and chunked transcoding: the encoder produced the three renditions 360p, 720p and 1080p, in one container per video. That is the configuration against which Section 6.5 later compares the chunked path.

The compute allocation of each run was verified after the fact rather than taken from the label the measurement script recorded, since a mislabelled run would silently invalidate the comparison that follows. Querying the job definition revision each job actually executed against resolved every run in Table 6.5 to the 1 vCPU / 2 GB revision, and every run in the comparison after it to the 4 vCPU / 8 GB revision.

Table 6.5: Transcoding pipeline latency by input size

| SIZE | DURATION | UPLOAD (S) | PIPELINE (S) | REALTIME FACTOR |
|---|---|---|---|---|
| 100 MB ($n$=3) | 120 s | 3.13 | 475.80 | 3.97 |
| 500 MB ($n$=1) | 600 s | 13.13 | 2281.25 | 3.80 |
| 1 GB ($n$=1) | 1600 s | 72.00 | 5917.03 | 3.70 |

*Note: measured at the 1 vCPU / 2 GB job configuration. Pipeline and upload columns are the arithmetic mean across replications. Realtime factor is pipeline time divided by video duration, so a value above 1.0 means transcoding took longer than the video's own runtime.*

Two observations follow from the table. The realtime factor stays within a narrow band of 3.70–3.97× across a more than thirteen-fold range of content duration, which indicates that the pipeline scales essentially linearly with duration at fixed compute. And for the 100 MB size, the three individual runs of 346.32, 539.80 and 541.28 s did not show the monotonic cold-start slowdown the measurement protocol anticipated, the first run being in fact the fastest of the three; at this scale Fargate Spot capacity variability appears to dominate over container image pull cost, rather than any first-run-specific effect.

The precision of two rows is limited. The 500 MB and 1 GB sizes were each measured once, because a full run at those sizes occupies between 30 and 100 minutes of AWS Batch time and repeated sampling was costly within the time and budget available. Chapter 7 returns to this as a threat to those two rows specifically.

A separate experiment raised the container allocation from 1 vCPU / 2 GB to 4 vCPU / 8 GB and repeated the measurement on the same two inputs. Pipeline time fell from a mean of 475.80 s to a mean of 115.56 s for the 100 MB input (3 runs each), and from 5917.03 s (1 run) to a mean of 1078.70 s for the 1 GB input (2 runs: 1080.29 s and 1077.10 s). Taken at face value these are speedups of 4.12× and 5.49× respectively.

Both figures exceed the 4× that the change in vCPU count alone could account for, and that observation deserves scepticism rather than celebration. Amdahl's Law bounds the achievable speedup *below* the resource ratio, because the serial portion of an encoder, entropy coding and rate control among others, does not parallelise; the multi-threaded H.264 literature reports exactly this sub-linear pattern, with Sankaraiah *et al.* measuring 1.97×/3.96×/7.71× at 2/4/8 threads [16] and Chen *et al.* 4.7–8.6× across six Cell SPEs [17]. A measured result above the resource ratio therefore indicates that something other than thread-level parallelism is contributing, and two confounds are visible in the data.

The first is that the experiment did not vary vCPU count in isolation: memory was raised from 2 GB to 8 GB at the same time, so any benefit from reduced memory pressure during the concurrent encoding of three renditions is folded into the same measurement. The second, and more serious, is the instability of the 1 vCPU baseline. The three 100 MB runs at 1 vCPU span 346.32 s to 541.28 s, a spread of 56.3%, whereas the corresponding 4 vCPU runs span only 24.0%. The speedup estimate is consequently very sensitive to which baseline statistic is chosen: 3.29× comparing the fastest run of each configuration, 4.12× comparing means, 4.15× comparing slowest runs, and 4.86× comparing medians. Only the first of these is consistent with the sub-linear bound the theory predicts. The 1 GB comparison rests on a single 1 vCPU observation and so admits no variance estimate at all.

The conclusion this data supports is therefore narrower than the headline numbers suggest: raising the allocation from 1 to 4 vCPU reduced pipeline latency by roughly a factor of four on this workload, but the present sample is too small and too noisy to establish whether the true scaling is sub-linear as theory requires, and the simultaneous memory change means the experiment does not isolate the effect of vCPU count. Establishing the scaling behaviour properly would require repeated 1 vCPU baselines, since the variance there rather than in the 4 vCPU measurements is what limits the conclusion, together with a separate arm that varies memory alone. This is recorded as future work in Section 7.4 rather than presented as a settled result.

Cost per video, by contrast, is robust to this uncertainty: AWS Batch on Fargate bills per vCPU-second, so roughly four times the hourly rate for roughly one quarter of the duration leaves the total charge per video essentially unchanged. The practical implication is that the 4 vCPU configuration buys a substantially lower waiting time for the user at close to no additional cost, which holds regardless of whether the exact speedup is 3.3× or 4.9×.

*Note: each size should be measured at least three times, and the first run reported separately, because it includes the cost of pulling the container image and is therefore substantially slower than the steady state.*

## 6.5 Chunked Transcoding of Long Videos

The single-container design evaluated in Section 6.4 transcodes a video at a roughly constant fraction of its own runtime, and one AWS Batch job is bounded by the two-hour attempt timeout set in its job definition. A requirement that the platform accept videos of four hours or more cannot be met by that path: a five-minute video took 26.7 minutes

as a single job, which extrapolates to about twenty-one hours for four hours of content. This section evaluates the second execution path that was added for that reason.

The path applies to videos of five minutes or longer, a threshold chosen from the measurements in Table 6.6. The job started by the upload event then becomes a planner. It reads the container structure of the source over HTTP range requests, divides the video into chunks whose length is a whole number of six-second groups of pictures, and submits child jobs to AWS Batch: two audio jobs, each encoding one audio bitrate once for the whole video; an array job whose elements each encode one chunk at every rendition; and a finalizer that starts when every chunk has finished, concatenates the playlists, measures the bandwidth of each rendition from the produced segments, extracts the thumbnail, runs content moderation and sets the record to `READY`. The array job is placed in a second, lower-priority queue that shares the compute environment, so a short video submitted behind a long one is served before the remaining chunks rather than after them. The planner chooses the chunk length so that each concurrent slot receives about three chunks, between one and five minutes long, and falls back to the single-job path when the source cannot be split safely, for example when its frame rate is variable or its audio and video start more than 0.25 seconds apart. Chunk boundaries were verified by analysing the packets of the produced renditions for gaps and overlaps, and the check passed in every run reported below.

All measurements ran in the staging environment, which uses the same container image, job definitions and compute settings as production but a separate database and separate storage buckets. Capacity is the Fargate vCPU quota available to the compute environment: 8 vCPU of Fargate Spot, which is the production quota, or 16 vCPU when an On-Demand environment of 8 vCPU was attached behind it. Each chunk runs in a 4 vCPU / 8 GB task, the size selected by the comparison in Figure 6.10. Latency is measured, as in the previous section, from the moment the upload finishes to the moment the record reaches `READY`, taking the return of the upload command as the end of the upload. The 25-minute source is a 1080p H.264 file of 2.75 GiB with an AAC track. The four-hour source was built by repeating a 1,600-second 1080p test-pattern clip nine times and adding a 128 kbit/s tone, and was uploaded with the S3 multipart protocol, which the browser path also uses for files larger than 512 MiB.

Table 6.6: Single-container path against chunked path for videos of five to fifteen minutes

| VIDEO LENGTH | SINGLE JOB (MIN) | CHUNKED (MIN) | SPEED-UP |
|---|---|---|---|
| 5 min | 26.7 | 11.9 | 2.2 |
| 10 min | ≈ 53.0 | 27.2 | ≈ 1.9 |
| 15 min | ≈ 80.0 | 17.4 | ≈ 4.6 |

*Note: values marked ≈ for the single-container path are extrapolated at 5.3 times the video duration from the measured five-minute run. The chunked values come from three videos competing for one 8 vCPU quota, so they overstate what a lone submission would see.*

Table 6.6 shows why the threshold sits at five minutes. For a five-minute video the chunked path finished in 11.9 minutes against 26.7 minutes as a single job, about 2.2 times faster, even though planning, audio encoding and finalisation take roughly 4.4 minutes of fixed cost. Below that length the fixed cost would be more than half of the processing time, so shorter videos keep the single job.

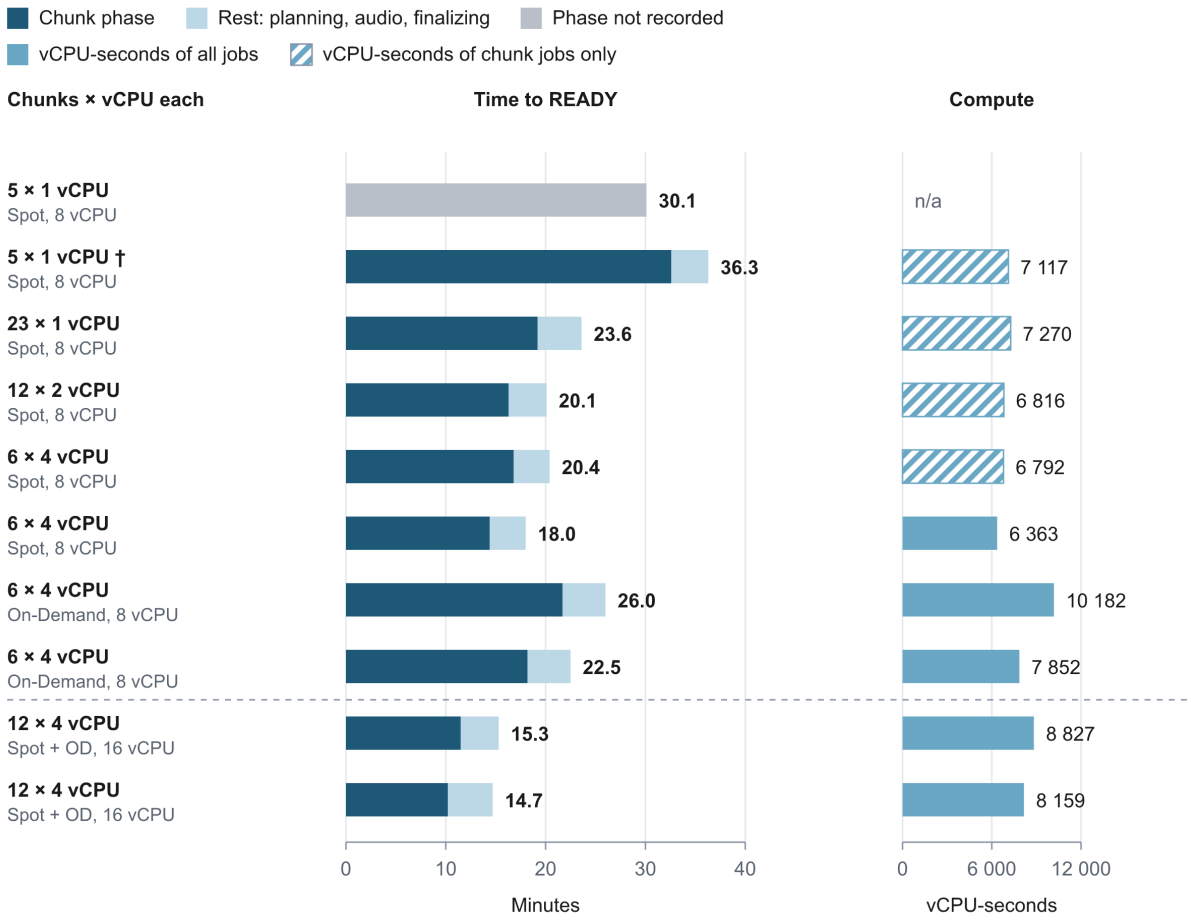



Figure 6.10: *A 25-minute video on the chunked path: time to READY and compute by chunk configuration and capacity*

*Note: the first four bars were timed from the creation of the first job and the later ones from the end of the upload, which differ by about half a minute. Bars are in order of measurement within each capacity; † marks the run on the production environment. The pale part of a time bar is what remains of the time to READY after the chunk phase, that is planning, audio and finalisation, and its order relative to the chunks is not shown. The vCPU-seconds of the hatched bars count chunk jobs only and those of the plain bars count every job of the video, so the two kinds are not comparable with each other. The phase lengths and the remaining columns are in Table B.5 (Appendix B).*

Figure 6.10 follows the same 25-minute video through the changes made to the chunked path. The first deployment cut the video into five chunks of five minutes on 1 vCPU tasks and took 36.3 minutes; five chunks used only five of the eight available vCPU, and chunks of identical size ran between 18.2 and 32.6 minutes because Fargate Spot hosts are not uniform. Choosing the chunk length from the capacity, which produced 23 chunks, reduced the time to 23.6 minutes, and moving the chunks to 4 vCPU tasks reduced it to 20.4 minutes and, on a later repeat, 18.0 minutes; a 4 vCPU task processed a second of video 4.7 times faster than a 1 vCPU task. Twelve 2 vCPU tasks gave the same time and the same vCPU-seconds as six 4 vCPU tasks, which is why the larger size was kept. Doubling the capacity to 16 vCPU shortened the video to 14.7 and 15.3 minutes, a factor of only 1.2, for 1.3 to 1.4 times the vCPU-seconds: planning, audio encoding and finalisation take about three minutes whatever the capacity, and each of the twelve smaller chunks pays a container start-up. For a single video of this length, additional capacity is therefore close to saturation.

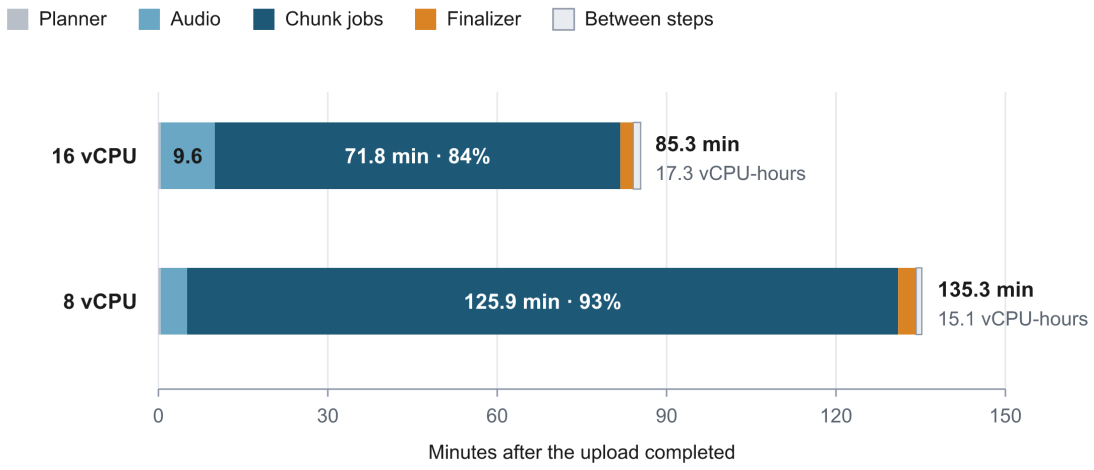



Figure 6.11: *A four-hour video: time from the end of the upload to READY, by step, at 16 and at 8 vCPU*

*Note: the pale segment at the end of each bar is the part of the time to READY that*

*belongs to none of the four steps, the queueing and hand-over between jobs. Steps too short to hold a label are given, in minutes, in Table B.6 (Appendix B).*

Figure 6.11 reports the requirement that motivated the path. At the production capacity of 8 vCPU a four-hour video reached `READY` 135.3 minutes after its upload finished, and with 16 vCPU, which doubles the number of chunks encoded at once, 85.3 minutes. Both are far inside the two-hour limit of a job, because no chunk ran longer than seven minutes. The first measurement of the path, taken with 1 vCPU chunks at 8 vCPU, took 185.0 minutes, so the later changes shortened the result at production capacity by 27%. Capacity helped the long video more than the 25-minute one, 1.6 times against 1.2, because 48 chunks keep every slot busy through many rounds and the fixed phases are a small share of the total. The compute used was 15.1 vCPU-hours at 8 vCPU and 17.3 at 16 vCPU, so doubling the capacity cost about 15% more compute for 37% less time.

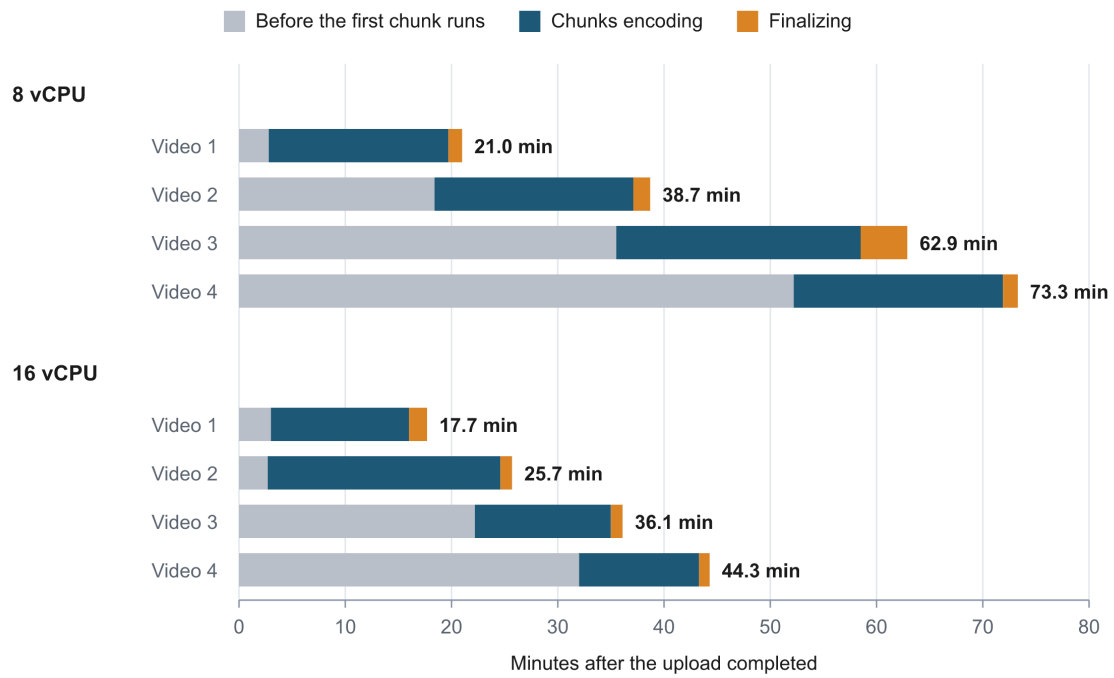



Figure 6.12: *Four 25-minute videos submitted together: when each waited, encoded and finalised, at 8 and at 16 vCPU*

*Note: in the 8 vCPU runs the four videos were uploaded together over one connection and timed from the first job creation. In the 16 vCPU runs the arrival was produced by server-side copies of one uploaded file, so all four events reached the pipeline within a second. Videos are numbered in the order of completion. The start and end of the chunk phase of each video are in Table B.7 (Appendix B).*

When four 25-minute videos arrived together (Figure 6.12), 8 vCPU finished them

one after another at 21.0, 38.7, 62.9 and 73.3 minutes, a throughput of 1.4 times real time, and 16 vCPU finished them at 17.7, 25.7, 36.1 and 44.3 minutes, 2.3 times real time. Capacity therefore shortened the batch by a factor of 1.65 for twice the vCPU, closer to proportional than for a single video, because the additional slots were always filled with chunks of the other videos. The order of completion follows the order of arrival: the queue is first-in first-out within a priority, so the first video is delayed least and the last most.

Table 6.7: Simultaneous submissions at 16 vCPU

| BATCH | VCPU | READY | ALL (MIN) | P50 (MIN) | P95 (MIN) | PER MIN | VCPU-H |
|---|---|---|---|---|---|---|---|
| 4 × 25min-1080p | 16 | 4/4 | 44.3 | 36.1 | 44.3 | 0.09 | 9.2 |
| 100 × 60s-1080p | 16 | 100/100 | 35.8 | 17.9 | 33.7 | 2.80 | 8.3 |

*Note: ALL is the time of the whole batch, P50 and P95 the median and 95th percentile of the latency of a video from its arrival, PER MIN the videos completed per minute, and VCPU-H the vCPU-hours used.*

To reach the load level named in the evaluation plan, one hundred 60-second clips were submitted at once at 16 vCPU (Table 6.7). All one hundred reached `READY` without a failure. The whole batch took 35.8 minutes, the median clip waited 17.9 minutes and the 95th percentile 33.7, and the batch drained at 2.8 videos per minute for 8.3 vCPU-hours of compute. The fastest clip needed 3.7 minutes, which is the time of a single job running alone, so the rest of the latency is queueing: sixteen one-vCPU jobs run at a time and one hundred clips need about six rounds. The queue absorbed the burst without losing any work, and the capacity quota rather than the architecture set the drain rate.

Fargate On-Demand did not make the work faster. The same 25-minute video on 8 vCPU of On-Demand took 26.0 and 22.5 minutes against 18.0 on Spot, with chunk medians of 414 and 313 seconds against 255 seconds, so On-Demand showed no advantage and, at a higher price per vCPU-second, was several times more expensive per video. Two On-Demand runs and one Spot run do not establish that On-Demand is slower, because the host hardware behind a Fargate task is not guaranteed, but they give no reason to prefer it other than as overflow when the Spot quota is exhausted. Spot capacity was also reliable: in the seven days of AWS Batch job history queried at the end of the measurements, 2 of 370 job executions (0.5%) had been interrupted, and both

were retried successfully by AWS Batch.

Several limits apply to these figures. Most rows are single runs, and chunks of identical size on Fargate Spot varied by up to 1.8 times within one job in the first deployment, so differences of about ten percent between two rows should not be read as an effect. The four-hour source is a synthetic test pattern at 5.35 Mbit/s, which may encode faster than camera footage, although its chunks ran at 0.9 seconds per second of video against 1.0 for the 25-minute file, which suggests the bias is small. The 16 vCPU capacity exceeds the quota granted for production at the time of the measurements, so those rows describe what a quota increase would give rather than the deployed system, and the staging environment served no other traffic during the runs, so production contention is not represented.

## 6.6 Load Testing

Scalability is assessed by submitting concurrent uploads with a virtual user count ramping to one hundred, verifying that the queue retains all work and that AWS Batch scales to process it. Upload payloads in this test are synthetic (a small fixed byte string rather than a real video file), because the object here is to exercise the upload API, S3 event notification, SQS queue, and Batch job submission path under concurrent load, not to measure transcoding quality. Job outcome is therefore not the metric of interest; queue behaviour is.

One caveat must be stated before the results, because it bounds what they can be taken to show. Inspecting the failure reasons of the submitted jobs afterwards revealed that they terminated at container initialisation with `ResourceInitializationError`, not at the FFmpeg stage as the synthetic payload would have caused. The cause was a defect in the Terraform configuration: the Secrets Manager entry holding the notification e-mail password was created as an empty container without a value whenever e-mail was left unconfigured, while the Batch job definition still declared that secret, so every task failed before its entrypoint ran. The defect is described and its correction recorded in Section 5.5. Its consequence for this experiment is specific: the control-plane observations below, that Amazon SQS retained and forwarded every message and that AWS Batch admitted exactly its configured number of concurrent tasks, are unaffected, because those mechanisms operate before and independently of the container's entrypoint. The *rate* at which the backlog cleared, however, reflects how quickly Fargate provisions and fails a task, not how quickly it completes real transcoding work, and must not be read as a throughput figure for production load. This gap is closed, though not with the

same measurement precision, in Section 6.6.2.

Table 6.8: Concurrent upload stress test results (API layer)

| METRIC | VALUE |
|---|---|
| Total requests | 100 |
| Throughput (requests/s) | 15.52 |
| Failure rate | 0% |
| Mean response time (ms) | 2388.52 |
| 95th percentile (ms) | 3317.79 |
| Peak virtual users | 50 |

*Note: produced by a second load generator, written against native* `fetch` *in Node.js. All 100 uploads (initiate, direct-to-S3 PUT, confirm) succeeded at the API layer.*

### 6.6.1 Cross-Validation with an Independent Tool

A single load generator can produce a misleading result if the generator itself, rather than the system under test, is the bottleneck. The experiment was therefore repeated with k6, an industry-standard load testing tool implemented in Go, driving the same three-step upload sequence against the same deployed endpoint at the same concurrency (50 virtual users, 100 total iterations). The k6 scenario uses the `shared-iterations` executor rather than the time-based ramp that the script originally specified, so that the total unit of work is fixed at exactly 100 uploads and is therefore directly comparable rather than merely similar.

Table 6.9: Cross-validation of the load test across two independent tools

| METRIC | NODE.JS | K6 |
|---|---|---|
| Upload cycles completed | 100 | 100 |
| Failure rate | 0% | 0% |
| Batch jobs queued (RUNNABLE) | 92 | 92 |
| Batch jobs admitted (STARTING) | 8 | 8 |
| SQS messages remaining | 0 | 0 |
| Queue drain, 76 jobs (s) | 416 | 417 |
| Consumption rate (jobs/min) | 10.96 | 10.94 |

The two tools agree exactly on every infrastructure-level observation. Immediately after each burst the queue held 92 jobs waiting with 8 admitted for execution, and Amazon SQS reported zero messages outstanding. The drain rate agrees to within 0.24%: measuring from the common reference point at which 76 jobs remained queued until the

queue emptied took 416 s in the Node.js run and 417 s in the k6 run, a consumption rate of 10.96 against 10.94 jobs per minute. Reproducing both the 92/8 split and the drain rate across two independently implemented generators running on different runtimes is considerably stronger evidence than either run alone that the eight-job ceiling and the resulting throughput are properties of the compute environment's configuration namely `max_vcpus` = 8 divided by `job_vcpu` = 1, rather than artefacts of how one particular client paced its requests.

The latency figures, by contrast, are *not* directly comparable, and reporting them side by side without qualification would be an error. The Node.js script times each complete upload cycle, so its mean of 2388.52 ms covers all three HTTP requests together; k6's `http_req_duration` times each HTTP request individually, giving a mean of 670.03 ms per request across 300 requests. Scaling the latter by the three requests per cycle yields 2010.09 ms, within 15.8% of the Node.js figure, close enough to corroborate it, and the residual gap is consistent with k6 running inside a Docker container with an additional network hop that the natively executed Node.js script did not incur. Throughput agrees on the same basis once k6's virtual-user initialisation is accounted for: the raw 100 cycles over 9.83 s understates the steady-state rate, because no iteration completed during the first four seconds, whereas the 100 cycles that completed in the remaining 5.8 s correspond to 17.24 cycles per second against the Node.js script's 15.52.

The queue and compute layer were observed separately by polling the AWS Batch job queue every 25 seconds after the 100 uploads completed. Two data points anchor this observation: immediately after the burst, 92 jobs were queued in the `RUNNABLE` state with 8 already `STARTING`, and the Amazon SQS queue itself reported zero messages remaining, meaning the Lambda job submitter had already drained every event into AWS Batch within seconds of the S3 notifications firing. The `STARTING` count held at 7–8 throughout the drain, matching `max_vcpus` = 8 divided by `job_vcpu` = 1 exactly, which confirms the compute environment enforced its configured concurrency ceiling rather than either exceeding it or under-utilising it. The backlog of 92 queued jobs reached zero 456 seconds after the burst, and no message was lost or left stuck. Subject to the caveat stated above, this is the direct evidence for the claim that opened this section: Amazon SQS retained every unit of work submitted faster than the compute layer could consume it, and AWS Batch admitted work strictly at, and never above, its configured limit while consuming that backlog.

### 6.6.2 Validating Real Transcoding Throughput

The caveat stated at the start of this section was closed once the Secrets Manager defect was corrected (Section 5.5) and the concurrency test was re-run with a genuine three-second H.264 source file in place of the synthetic byte string that every earlier run in this section used. The scenario, executor, and concurrency were otherwise unchanged from Table 6.9: fifty virtual users driving the `shared-iterations` executor to exactly one hundred upload cycles against the same production endpoint.

All three hundred HTTP requests succeeded, covering initiate, direct-to-S3 PUT, and confirm across the one hundred cycles, for a throughput of 23.47 requests per second and a 95th-percentile request duration of 1827 ms, both consistent with the request-level figures in Table 6.9. The decisive difference is downstream of the HTTP layer: every one of the resulting one hundred Batch jobs reached `SUCCEEDED`, and none failed. Two point-in-time samples of the job queue, taken roughly ten minutes apart while the backlog drained, showed 18 succeeded / 3 running / 84 queued shortly after the burst and 28 succeeded / 5 running / 74 queued about ten minutes later, consistent with the same seven-to-eight-way concurrency ceiling established in Section 6.6.1 and confirming that ceiling now gates genuine FFmpeg work rather than a task that fails at initialisation. What it establishes, which no earlier run in this chapter could, is that the queueing and admission-control behaviour validated in Section 6.6.1 sits in front of a pipeline that actually completes real transcoding work at that concurrency rather than one that only queues and admits it.

### 6.6.3 Drain Rate Under Real Transcoding Load

That run established that the work completes but not how fast the backlog clears, because it was not instrumented with the twenty-five-second polling cadence that produced the synthetic drain curve. Repeating it with that cadence in place closes the last measurement gap and, more usefully, makes the two curves directly comparable: same scenario, same executor, same fifty-way concurrency and one hundred uploads, differing only in whether the payload is a real video.

The HTTP layer behaved as before, with three hundred requests, no failures and 33.12 requests per second, and all one hundred Batch jobs again succeeded, with none failing. Independently of the Batch job states, all one hundred video records were confirmed to have reached `READY` in the database, which verifies that the jobs did the work rather than merely exiting zero. Table 6.10 reports the comparison.

Table 6.10: Backlog drain under synthetic and real payloads

| | SYNTHETIC | REAL VIDEO |
|---|---|---|
| Jobs submitted | 100 | 100 |
| Jobs succeeded | 0 | 100 |
| Drain duration (s) | 456 | 826 |
| Drain rate (jobs/min) | 13.16 | 7.26 |
| Peak concurrent `RUNNING` | 0 | 8 |
| Implied wall-clock per job (s) | n/a | 66.1 |

*Note: both columns sampled every 25 s. The synthetic column records no successes and no `RUNNING` observations because those jobs failed at FFmpeg almost immediately, which is what that experiment intended. Implied wall-clock per job is the drain duration multiplied by the observed concurrency and divided by the job count.*

The real backlog drains at 7.26 jobs per minute against 13.16 for the synthetic one, so doing the work costs a factor of 1.8 in throughput relative to merely admitting and rejecting it. The concurrency ceiling is confirmed rather than inferred: `RUNNING` peaked at exactly eight, matching `max_vcpus` divided by the per-job vCPU allocation, and stayed there through the linear portion of the curve. The synthetic run could not establish this, because with jobs failing on startup the `RUNNING` count was zero at every sample and only `STARTING` was observable.

The implied per-job figure is where the number becomes interesting rather than merely precise. At eight-way concurrency, 826 seconds for one hundred jobs means roughly 66 seconds of wall-clock per job, and that is for a three-second video. Section 6.4 measured a 100 MB input at around 476 seconds, so the fixed overhead visible here is not a small fraction of that, but for short content it is almost the entire cost. What the pipeline spends on a three-second clip is overwhelmingly container provisioning, image pull and result upload rather than encoding, which explains why the realtime factor reported earlier stays in a narrow band across input sizes: the variable cost scales with duration while a fixed cost of roughly a minute is paid regardless. For a platform whose median upload is short, that fixed cost, not FFmpeg's throughput, is what determines how long a user waits.

## 6.7 Cost Analysis

The cost comparison contrasts a traditional deployment, in which an Amazon EC2 instance runs FFmpeg continuously, against the serverless container architecture. The workload assumption is three hundred videos per month averaging five minutes each.

The processing effort is taken from the measurements of Section 6.5 and not assumed: a 25-minute video used 6,363 vCPU-seconds at the best configuration and a four-hour video 15.1 vCPU-hours, which is about 0.35 vCPU-hours for each five minutes of video, so the month needs about 105 vCPU-hours. An earlier version of this estimate assumed forty-five seconds of encoding per video, 3.75 hours a month. The measurements show that figure to have been about thirty times too low, because encoding one second of 1080p video takes about four vCPU-seconds.

Prices are the list prices of ap-southeast-1 read from the AWS Price List API on 15 October 2026: 0.05056 USD per Fargate vCPU-hour and 0.00553 USD per GB-hour, which is 0.0616 USD per vCPU-hour for the 2 GB per vCPU of the chunk tasks. Spot capacity is taken at 30% of that, 0.0185 USD, since AWS publishes discounts of up to 70%; the real Spot price varies with demand.

Table 6.11: Monthly operating cost comparison for the part of the bill that the architecture controls (ap-southeast-1)

| COMPONENT | EC2 (ALWAYS ON) | SERVERLESS | SAVING |
|---|---|---|---|
| Compute | `c5.xlarge` for 730 h: $124.10 | Fargate Spot for 105 vCPU-h: $1.94 | 98.44% |
| Storage | EBS 100 GB plus S3 50 GB: $9.25 | S3 with Glacier lifecycle: $1.45 | 84.32% |
| Queueing | Self-hosted broker | SQS and Lambda: $0.01 | n/a |
| **Total** | **$133.35** | **$3.40** | **97.45%** |

Two costs are excluded from Table 6.11 because they are neutral with respect to the architectural choice, and both are larger than the serverless column. Content delivery is the first: the volume of data served to viewers is identical whichever compute model produces the renditions, and attributing a CloudFront charge to the EC2 column while crediting the serverless column with the free tier would overstate the saving. At post-free-tier rates it is about 12 USD a month. Content screening is the second, because both architectures must screen what users upload. A five-minute video is sampled at one frame every five seconds, 60 images, and at the Singapore price of 0.00125 USD per image for the first million images of the month that is 0.075 USD per video and 22.50 USD for three hundred videos, more than six times the whole architecture-dependent bill of the serverless column. With both costs added to both columns the totals are $167.85 against $37.90, a saving of about 77.4%. That is the conservative figure and the one to quote for total cost of ownership at scale; the saving on the part that the architecture controls is 97.5%.

The saving originates entirely in the elimination of idle capacity. Under the stated assumptions the always-on instance offers 2,920 vCPU-hours in a month, four vCPUs for 730 hours, while the work needs about 105 of them, a utilisation of roughly 3.6%. It follows that the advantage is not universal: as sustained utilisation rises, per-second Fargate billing approaches and eventually exceeds the cost of a reserved instance. The architecture is therefore best suited to workloads that are genuinely bursty, which is the case for user-generated video uploads.

# Chapter 7

# Conclusion and Future Work

## 7.1 Summary of Achievements

This project set out to build a video sharing platform whose transcoding subsystem runs on a serverless container and event-driven architecture, and to evaluate whether that choice delivers the cost and scalability benefits it promises.

The functional platform was completed. Users can register, authenticate, upload videos directly to Amazon S3 through pre-signed URLs, watch them with adaptive bitrate playback across up to six renditions, control whether each video is public, unlisted or private, manage their channel, search and filter the catalogue, and interact through likes and comments.

The platform also moderates what it publishes. Uploaded videos are screened automatically with Amazon Rekognition, and doubtful ones are held back for review by staff working in a console with separate roles: operators decide, auditors read the error rates, and administrators assign roles. Every decision is recorded together with the machine's own conclusion, so that the false positive rate and, from a random audit sample, the false negative rate can be estimated with confidence intervals, and the owner of a removed video can appeal (Section 4.5). The implementation is covered by 147 of the backend's tests, but the rates themselves have not been measured on real traffic, so this report makes no claim about how accurate the screening is. Uploading also requires a verified e-mail address, so that the public content of the platform is tied to a mailbox that someone can read (Section 4.5.6).

The transcoding pipeline operates without manual intervention. An upload emits an S3 event that is buffered in Amazon SQS and dispatched by an AWS Lambda function to AWS Batch, where a container packaging FFmpeg produces the renditions, the master playlist, and a thumbnail before terminating. Conditional database writes prevent a

duplicate delivery from overwriting a completed job, failed jobs are retried by AWS Batch and, when they exhaust their attempts, raise an alert carrying the reason for the failure rather than terminating silently. Both mechanisms replaced earlier designs that held only for an execution mode the deployed system does not use; the reasoning is set out in Section 4.2 and Section 5.5.

The platform also processes long videos. Videos of five minutes or longer are divided by a planner job into chunks that an array of AWS Batch jobs encodes in parallel and a finalizer job merges, while shorter videos keep the single-job path. Measured on the deployed pipeline, a four-hour video reached the `READY` state 135 minutes after its upload finished at the production capacity of 8 vCPU and 85 minutes at 16 vCPU, and one hundred 60-second clips submitted at once were all processed without a failure (Section 6.5).

Content protection was implemented in two layers. Origin Access Control keeps the storage bucket entirely private, and CloudFront Signed Cookies ensure that private videos are rejected at the edge even when the exact manifest URL is known. This closes a gap that would otherwise have made the private visibility setting ineffective in practice, since the API can restrict its own responses but cannot restrict a content delivery network.

The infrastructure is fully described as code in thirteen Terraform modules across three environment definitions, and seven GitHub Actions workflows automate linting, unit testing, static security analysis, container scanning, infrastructure validation, and deployment. The security gate blocks merges on fixable critical findings rather than merely reporting them.

The automated test suite grew to 853 tests across 52 suites, 492 for the backend and 361 for the transcoder. Its practical value was demonstrated when it caught a defect in the cookie signing implementation that would have prevented every private video from playing once deployed. A second defect in that same subsystem, which only appeared once the distribution was live, is described in Section 5.5.

## 7.2 Strengths of the System

The strongest property of the design is the separation between the application tier and the media path. The backend API issues pre-signed URLs, records metadata and answers queries, and never handles video bytes, which flow directly between the browser, Amazon S3 and CloudFront. The API's resource consumption is therefore independent of video size and upload concurrency, and a failure in the processing tier leaves already-published videos playable.

The processing tier costs nothing while idle. Because transcoding runs on AWS Batch over Fargate rather than on a reserved instance, compute capacity exists only while a job runs. Section 6.7 estimates the monthly operating cost of this arrangement at $3.40 against $133.35 for an always-on instance sized for the same workload, a difference that originates entirely in the elimination of idle capacity. Screening and delivery cost the same on both sides, and with them included the saving is about 77%.

The same property extends to long videos. Chunk jobs are ordinary AWS Batch jobs on the same compute environment, so additional vCPU quota translates directly into lower latency: a four-hour video took 135 minutes at 8 vCPU and 85 minutes at 16 vCPU, and no chunk came near the two-hour limit of a job (Section 6.5).

Content protection is enforced at the edge rather than only in the API. Origin Access Control keeps the storage bucket private and CloudFront Signed Cookies reject unauthorised requests before they reach it, which is what makes the private visibility setting meaningful, since an API can restrict its own responses but cannot restrict a content delivery network. The mechanism was verified against the deployed system rather than in code alone, as Section 5.5 records.

The infrastructure is reproducible. Thirteen Terraform modules describe three environment definitions in full, and seven GitHub Actions workflows automate linting, unit testing, static security analysis, container and dependency scanning, infrastructure validation and deployment. The security gate blocks a merge on fixable critical findings rather than merely reporting them, and the scanner itself is pinned to a release commit rather than to a moving branch.

Finally, the performance claims in this report are measured rather than asserted. Time-to-First-Frame was measured from six AWS regions and from a consumer connection in Vietnam, and led to two corrections of the CloudFront price class that reduced the median latency seen from Vietnam by a factor of 6.6 and the median seen from Brazil by a factor of 32. Transcoding throughput was measured under one hundred concurrent uploads of real video and cross-validated with two independently implemented load generators. And the automated suite, which has since grown to 853 tests in 52 suites, caught a signing defect that would otherwise have prevented every private video from playing.

## 7.3 Limitations

Several limitations remain in the delivered system.

The bitrate ladder is fixed at six rungs regardless of content, and a video receives those that its source resolution can fill. As the literature reviewed in Section 2.2 shows, the

optimal ladder is content-dependent, so a fixed ladder wastes bandwidth on simple content while under-serving complex content. Netflix reported bitrate reductions between 28% and 38% at equivalent perceptual quality by optimising the ladder per shot [7], which indicates the magnitude of the opportunity forgone.

Parallelism is bounded by the account quota and by fixed per-job costs. Chunked transcoding converts capacity into lower latency for long videos, but the gain flattens for shorter ones: a 25-minute video finished in 18.0 minutes at 8 vCPU and in about 15 minutes at 16 vCPU, a speed-up of only 1.2, because planning, audio encoding and finalisation take about three minutes regardless of capacity and each chunk pays a container start-up (Section 6.5). Production runs on a Fargate Spot quota of 8 vCPU, so a burst of long videos is served one after another: four 25-minute videos submitted together finished after 73 minutes, and a request for a larger quota had not been granted when the measurements ended. Videos shorter than five minutes keep the single-container path, where processing time still scales linearly with duration; Section 6.6.3 measured roughly 66 seconds of wall-clock time per job for a three-second clip, which shows how far fixed overhead dominates for short content.

The automatic screening samples one frame every five seconds, so content that is on screen for less than that interval can pass it; this is why viewer reports, staff review and audit sampling follow it. Its confidence thresholds, 60 and 90 per cent, were set from the provider's guidance and were not calibrated on this platform's own content, and, as stated in Section 7.1, the error rates of the arrangement as a whole have not been measured on real traffic. Screening is also the largest line of the monthly bill under the stated workload, 22.50 USD at sixty images per five-minute video, so a longer sampling interval would trade coverage for money.

The controls on accounts are limited. A new password is compared with a list of common ones, with the user's own details and with a breach service, as current guidance for verifiers asks [14], but existing passwords were not rechecked and the breach lookup is skipped when the service does not answer within two seconds. Mail to one address is capped at five per hour, yet the count lives in process memory and registration has no CAPTCHA, so automated registration is slowed by the per-address limit and not stopped. And every account created before verification was introduced counts as unverified, except those that sign in with Google, until its owner follows a link.

Signed Cookies remain valid for two hours after issuance, so switching a video from public to private leaves viewers holding unexpired cookies with access until those cookies lapse. Immediate revocation would require rotating the signing key or introducing an edge function that performs a per-request check. The system also implements no digital

rights management: an authorised viewer can capture the decrypted stream or share their cookies, and preventing this is outside the scope of the techniques used here.

Rate limiting and view deduplication hold their state in process memory. This is correct for the current single-instance deployment but would need to move to a shared store such as Redis before the backend could be scaled horizontally, since each instance would otherwise enforce its own independent limits. The backend itself remains one process on one instance in a single region and is the only single point of failure in the system, the transcoding and delivery tiers being managed services that scale and recover on their own.

The channel management interface exposes metadata modification through an in-place editing modal, allowing uploaders to update the title, description, category, and visibility of an existing video without losing accumulated views, comments, or transcoding artifacts. However, tags management remains confined to the initial upload form, and thumbnail replacement is not yet supported in the interface; changing a video's poster requires administrative intervention or re-uploading.

The long-video measurements are narrower than their headline figures in one respect as well: the four-hour results are one run per capacity on a synthetic source, a test pattern repeated nine times, and the 16 vCPU rows describe a quota that production does not currently have (Section 6.5).

Two experimental results are narrower than the headline figures suggest. The comparison between 1 and 4 vCPU allocations rests on a 1 vCPU baseline whose three runs span 56%, so the estimated speedup varies between 3.3 and 4.9 times depending on which statistic is compared, and memory was raised at the same time as the vCPU count, so the experiment does not isolate either variable. The delivery latency figures were collected from probes running inside AWS regions rather than on residential connections, so they describe edge proximity under favourable network conditions rather than what a home viewer would experience.

The two-language interface has one gap of the same kind. A viewer's language choice is held in the browser and sent to the API on each request, which is sufficient for everything the interface and the API produce, but the notification e-mails announcing that a video is ready or has failed are sent from an AWS Batch job long after the request that started it. That job has no request to read a language from, and the account record stores no language preference, so those two e-mails are sent in both languages. Storing the preference on the user document would let them be sent in one, and is the correct fix rather than the one adopted here.

Finally, the CloudFront distributions are provisioned in a second AWS account,

because the primary account was not permitted to create them. The arrangement is invisible to viewers and changes nothing about the security property being provided, but it splits the infrastructure across two sets of credentials and carries operational overhead that a verified account would not.

## 7.4 Future Work

Two measurements should still be repeated before the experimental results are considered settled. The Time-to-First-Frame measurement has been repeated against the live distribution (Section 6.3.1) and then from several client locations (Section 6.3.2), which closed that item and, in doing so, exposed a further limitation that has since been corrected: viewers in South America and Oceania fell outside the configured price class and were served across an ocean until both distributions were moved to `PriceClass_All`. What remains open is that every probe ran inside an AWS region, so the figures describe edge proximity under favourable network conditions rather than residential connections; comparing the two Vietnamese samples suggests the last mile costs roughly a factor of two, but one pair of observations is not a basis for that claim. The concurrency test re-run with genuine video payloads (Section 6.6.2) confirmed that every job succeeds under load, but it was not instrumented with the same twenty-five-second polling cadence as the original synthetic run, so a precise drain-rate figure for real transcoding throughput, as opposed to confirmation that throughput is non-zero and failure-free, remains to be measured; repeating the same short-clip payload with that polling protocol in place would close this. The vCPU scaling comparison should also be repeated with more replications of the 1 vCPU baseline and with memory held constant, since Section 6.4 showed the present estimate to be dominated by baseline variance and confounded by a simultaneous change in memory allocation.

The most valuable functional extension would be per-title bitrate ladder optimisation driven by a perceptual quality metric such as VMAF. Encoding a short probe of the source at several operating points and selecting those on the convex hull of the quality-versus-bitrate curve would reduce delivery bandwidth at unchanged perceived quality, which lowers the largest remaining cost component of the system.

Chunked transcoding is in place, so the remaining work on long videos concerns its efficiency. Each chunk pays a container start-up of tens of seconds, which is why doubling the capacity helps a 25-minute video so little. Encoding several chunks in one longer-lived worker, or raising the minimum chunk length, would trade parallelism for less overhead, and the measurements of Section 6.5 suggest that the best choice depends

on both the length of the video and the quota available. A related extension is to compare a faster x264 preset with the current one using VMAF on difficult clips, since a faster preset could shorten every chunk if the quality loss is acceptable.

Account hardening would continue with a CAPTCHA on registration and password reset, a shared store for the mail count, and a second backend instance behind a health-checked address, which would remove the one single point of failure of the system. The state that matters is already in MongoDB Atlas and S3, so a second identical instance needs a load balancer and, for the rate limits, the shared store; an orchestrator such as Kubernetes would add automatic replacement and rolling updates, a larger change than the single point of failure calls for.

The moderation console already collects what is needed to tune the screening: the reason codes show which labels cause reversed removals, and the audit sample gives an unbiased estimate of what passes. Once a few hundred decisions have accumulated, the confidence thresholds and the label policy can be adjusted from that evidence and the effect measured again, instead of staying at the provider's defaults.

Hardware acceleration offers a further avenue. Research on GPU-enabled serverless platforms for HEVC encoding [18] suggests substantial throughput gains, and adopting a more efficient codec such as HEVC or AV1 alongside H.264 would reduce bandwidth for clients that support it.

Finally, moving the rate limiting and deduplication state into a shared store, and adding distributed tracing across the S3, SQS, Lambda, and Batch boundaries, would prepare the system for horizontal scaling and make failures in the asynchronous pipeline substantially easier to diagnose.

# Bibliography


[1] Netflix Technology Blog, "Rebuilding netflix video processing pipeline with microservices." https://netflixtechblog.com/rebuilding-netflix-video-processing-pipeline-with-microservices-4e5e6310e359, 2024. Accessed: 2026-08-10.

[2] Netflix Technology Blog, "The making of VES: the cosmos microservice for netflix video encoding." https://netflixtechblog.com/the-making-of-ves-the-cosmos-microservice-for-netflix-video-encoding-946b9b3cd300, 2024. Accessed: 2026-08-10.

[3] Amazon Web Services, "Video on demand on AWS: Implementation guide." https://docs.aws.amazon.com/solutions/latest/video-on-demand-on-aws/, 2025. Accessed: 2026-08-10.

[4] M. Zhang, Y. Zhu, C. Zhang, and J. Liu, "Video processing with serverless computing: A measurement study," in *Proceedings of the 29th ACM Workshop on Network and Operating Systems Support for Digital Audio and Video (NOSSDAV)*, 2019.

[5] M. Golec, G. K. Walia, M. Kumar, F. Cuadrado, S. S. Gill, and S. Uhlig, "Cold start latency in serverless computing: A systematic review, taxonomy, and future directions," *ACM Computing Surveys*, vol. 57, no. 3, 2025. Published version of arXiv:2310.08437.

[6] Netflix Technology Blog, "Per-title encode optimization." https://netflixtechblog.com/per-title-encode-optimization-7e99442b62a2, 2015. Accessed: 2026-08-10.

[7] Netflix Technology Blog, "Dynamic optimizer: A perceptual video encoding optimization framework." https://netflixtechblog.com/dynamic-optimizer-a-perceptual-video-encoding-optimization-framework-e19f1e3a277f, 2018. Accessed: 2026-08-10.

[8] Amazon Web Services, "Serve private content with signed URLs and signed cookies: Amazon cloudfront developer guide." https://docs.aws.amazon.com/AmazonCloudFront/latest/DeveloperGuide/PrivateContent.html, 2025. Accessed: 2026-08-10.

[9] Amazon Web Services, "Moderating content, Amazon Rekognition developer guide." https://docs.aws.amazon.com/rekognition/latest/dg/moderation.html. Accessed: 2026-10-15.

[10] Amazon Web Services, "Guidelines and quotas in Amazon Rekognition." https://docs.aws.amazon.com/rekognition/latest/dg/limits.html. Accessed: 2026-10-15.

[11] "The Santa Clara principles on transparency and accountability in content moderation." https://santaclaraprinciples.org/, 2021. Version 2.0. Accessed: 2026-10-15.

[12] E. B. Wilson, "Probable inference, the law of succession, and statistical inference," *Journal of the American Statistical Association*, vol. 22, no. 158, pp. 209–212, 1927.

[13] J. Ali, "Validating leaked passwords with k-anonymity." Cloudflare Blog, https://blog.cloudflare.com/validating-leaked-passwords-with-k-anonymity/, 2018. Published 2018-02-21. Accessed: 2026-10-16.

[14] P. A. Grassi *et al.*, "Digital identity guidelines: Authentication and lifecycle management," NIST Special Publication 800-63B, National Institute of Standards and Technology, 2017. Includes updates as of 2020-03-02. https://doi.org/10.6028/NIST.SP.800-63b. Accessed: 2026-10-16.

[15] M. Burrows, "The chubby lock service for loosely-coupled distributed systems," in *Proceedings of the 7th USENIX Symposium on Operating Systems Design and Implementation (OSDI)*, 2006.

[16] S. Sankaraiah, L. H. Shuan, C. Eswaran, and J. Abdullah, "Scalable video encoding with macroblock-level parallelism," *EURASIP Journal on Advances in Signal Processing*, vol. 2014, p. 145, 2014.

[17] C.-Y. Chen, S.-C. Cheng, *et al.*, "Task-based parallel H.264 video encoding for explicit communication architectures," in *Proceedings of the International Confer-*

*ence on Embedded Computer Systems: Architectures, Modeling, and Simulation (SAMOS)*, 2011.

[18] A. Salcedo-Navarro, R. Peña-Ortiz, J. M. Claver, M. Garcia-Pineda, and J. Gutierrez-Aguado, "Towards GPU-enabled serverless cloud edge platforms for accelerating HEVC video coding," *Cluster Computing*, vol. 28, p. 68, 2025.

# Appendix A

# Supplementary Material

## A.1 Repository Structure

The source code is organised as a monorepo with the following top-level layout.

```
DACNTT_VideoStreaming/
  frontend/            React single page application (Vite, HLS.js)
  backend/             Node.js Express API and test suite
  transcoder/          FFmpeg worker and Docker image
  infrastructure/
    modules/           Thirteen reusable Terraform modules
    environments/      dev, staging and prod definitions
  .github/workflows/   Seven CI/CD workflows
  scripts/             Benchmarking and load testing scripts
  docs/                Architecture diagrams, cost analysis,
   measured results
  report/              LaTeX sources of this report
```

## A.2 FFmpeg Transcoding Command

The following invocation is the one the worker builds for a 1080p source at 24 fps, which fills all six rungs of the ladder, and it produces every rendition from one read of the source. A single input is followed by one output block per rendition, each carrying its own scaling filter and encoder settings, so FFmpeg decodes the source once and feeds all six filter chains from it. The blocks after the first are abbreviated here, and the 360p, 480p and 720p blocks are left out of the listing; in the source every block repeats the first in full. The master playlist is not written by FFmpeg: the worker generates it afterwards,

which is why no -master_pl_name argument appears. It does so from the encoded output rather than from the settings above, measuring each rendition's peak segment bit rate from the segment sizes and their #EXTINF durations, and reading the codec string for each variant out of the sequence parameter set of its first segment.

The keyframe interval is derived from the source rather than assumed. The worker probes the first video stream and reads avg_frame_rate, preferring it over r_frame_rate because the latter is a base rate FFmpeg infers from the timing grid and need not describe the frames that are actually present.

A screen recording taken from the project's own test material shows how far apart the two can be. The file reports r_frame_rate as 60000/1001, that is 59.94 fps, while avg_frame_rate reports 28.725 fps; counting frames confirms the second, at 287 frames in ten seconds. Every interval between consecutive frames turns out to be an integer multiple of 1/144 second — four, five or six ticks, giving instantaneous rates of 36, 28.8 and 24 fps — so the real timing grid is the 144 Hz display, and neither the 59.94 that r_frame_rate advertises nor the 30 the source game was capped at. The cap cannot be met exactly, because 144 is not divisible by 30 and a frame would have to occupy 4.8 ticks.

The consequence for the group of pictures is direct. Taking avg_frame_rate gives 172 frames, or 5.988 seconds, which fits inside the segment. Taking r_frame_rate would give 359 frames, or 12.5 seconds, more than twice the segment length. A fixed 30 fps assumption would give 180 frames, or 6.27 seconds, which also overruns. This is also why -force_key_frames is retained alongside -g: when the source rate varies between 24 and 36 fps, an interval counted in frames cannot correspond to a fixed interval in time, and only the time-based expression can.

Once the rate is known the group of pictures is floor(fps × 6) frames, floored rather than rounded so that it never exceeds the segment length. The same count of 180 frames illustrates why the rate has to be right before the arithmetic can be: it lasts 6.27 seconds at the 28.725 fps just measured, and 6.006 seconds at 29.97 fps, where it arises instead from rounding 179.82 upward. Both overrun a six-second segment, and in both cases the boundary drifts past the point where a keyframe exists. The value shown below, 144, is what a 24 fps source produces.

Two further arguments keep the boundaries aligned. Scene detection is disabled, because letting the encoder place keyframes at scene changes would allow the renditions to cut at different points, and RFC 8216 requires that matching content in variant streams carry matching timestamps. -force_key_frames then pins a keyframe to every sixth second of media time; unlike -g, which only bounds the interval from above, it is absolute

and independent of the detected frame rate, so a misdetected source still yields aligned segments.

The H.264 profile is pinned but the level is not. Each rendition carries a different frame size, and the lowest conforming level therefore differs between them, so the level is left for the encoder to derive from the resolution rather than fixed in the command. The pixel format is pinned to 8-bit 4:2:0 for the same reason as the profile: a 10-bit or 4:4:4 source would otherwise be encoded in a form that the main profile does not allow and most browsers do not decode.

```
ffmpeg -i input.mp4 -hide_banner -loglevel warning -stats -y \
  -vf "scale=256:144,setsar=1" \
  -c:v libx264 -b:v 120k -maxrate 150k -bufsize 240k \
  -preset fast -profile:v main -pix_fmt yuv420p \
  -g 144 -keyint_min 144 -sc_threshold 0 \
  -force_key_frames "expr:gte(t,n_forced*6)" \
  -c:a aac -b:a 48k -ar 44100 -ac 2 \
  -f hls -hls_time 6 -hls_list_size 0 \
  -hls_segment_filename 144p/segment_%03d.ts  144p/playlist.m3u8 \
  \
  -vf "scale=426:240,setsar=1" -c:v libx264 -b:v 240k -maxrate 300k
   -bufsize 480k \
  -c:a aac -b:a 64k -f hls -hls_time 6 \
  -hls_segment_filename 240p/segment_%03d.ts  240p/playlist.m3u8 \
  \
  ... 360p, 480p and 720p in the same form ... \
  \
  -vf "scale=1920:1080,setsar=1" -c:v libx264 -b:v 4000k -maxrate
   5000k -bufsize 8000k \
  -c:a aac -b:a 192k -f hls -hls_time 6 \
  -hls_segment_filename 1080p/segment_%03d.ts 1080p/playlist.m3u8
```

## A.3 Signed Cookie Custom Policy

The policy signed by the backend before issuing playback cookies. The wildcard in the resource path covers the manifest and every segment of one specific video, and nothing beyond it.

```
{
  "Statement": [
```

```
    {
      "Resource": "https://cdn.zelostech.site/videos/<videoId>/*",
      "Condition": {
        "DateLessThan": { "AWS:EpochTime": 1786300347 }
      }
    }
  ]
}
```

## A.4 Reproducing the Measurements

The experimental results reported in Chapter 6 are produced by the scripts listed below. Detailed instructions, including the environment variables required and the order in which the measurements must be taken, are given in `docs/results/README.md` within the repository.

Every table of measurements in Chapter 6 and in Appendix B is listed below against the script that produced it and the file its figures were read from, so that any individual number can be traced back to its source. Paths are relative to the repository root, and the result files are those under `docs/results/`.

Table A.1: Provenance of each measurement table

| TABLE | SCRIPT | RESULT FILE |
|---|---|---|
| B.1 | scripts/benchmark-qoe.js | qoe-ttff.json |
| B.2 | scripts/benchmark-qoe.js | qoe-ttff-cloudfront.json |
| B.3 | scripts/benchmark-qoe.js, deployed as a Lambda to each region | qoe-ttff-multiregion.json |
| 6.1 | scripts/qoe/collect.js | qoe-playback-<profile>.json |
| 6.2 | Segment sizes and #EXTINF durations read from the processed bucket | — |
| 6.3 | scripts/qoe/collect.js, run before and after the correction | qoe-playback-<profile>.json |
| B.4 | scripts/qoe/compare.js, driven by docs/results/qoe-sources.json | qoe-playback-<source>-<profile>.json, qoe-comparison.json |
| 6.4 | scripts/qoe/collect.js with -dpr | qoe-playback-<source>-unthrottled.json, qoe-playback-<source>-unthrottled-dpr2.json |
| 6.5 | scripts/measure-transcode.js | transcode-timing.json |
| 6.8 | scripts/k6-load-test.js | k6-summary.json, stress-test-concurrency.json |
| 6.9 | scripts/node-load-test.js | node-load-test.json |
| 6.10 | scripts/k6-load-test.js | drain-rate-real-payload.json, stress-test-concurrency.json |
| 6.11 | Published AWS list prices, computed analytically | — |

The charts of Chapter 6 are drawn by the scripts docs/diagrams/svg/11-chart-ttff-cdn.mjs to docs/diagrams/svg/16-chart-concurrent-four.mjs, and each reads the result files named above for the table it replaces. The three that chart the transcoding measurements read report/generated/chart-*.json, which scripts/results/build-report-tables.py writes from the same runs as the generated tables, so those charts and tables cannot differ.

## A.5 Deploying the Infrastructure

The complete AWS environment is provisioned from a single directory.

```
cd infrastructure/environments/dev
terraform init
terraform apply
```

Enabling signed cookies additionally requires generating an RSA key pair, supplying the public key to Terraform, and configuring the backend with the corresponding private key and the key pair identifier reported by `terraform output`. The full procedure is documented in `docs/PRIVATE_VIDEO_SIGNED_COOKIES.md`.

# Appendix B

# Measurement Tables

Chapter 6 shows six sets of measurements as charts, because what each of them reports is a comparison or a trend that is easier to see than to read. This appendix gives the same measurements as tables, so that every value can be read exactly and so that the statistics a chart leaves out, such as percentiles and cache-hit medians, remain available. Each chart reads the same result files as its table, and a test in the repository checks that the numbers in the two agree; Section A.4 names the files.

## B.1 Time-to-First-Frame

Table B.1 gives the distribution of each stage of the baseline measurement against the S3 bucket; Figure 6.7 shows its medians.

Table B.1: Time-to-First-Frame measurement results

| STAGE | MEAN | MEDIAN | P95 | MIN | MAX |
|---|---|---|---|---|---|
| Master playlist | 95.55 | 82.49 | 355.02 | 76.61 | 355.02 |
| Rendition playlist | 88.62 | 82.40 | 207.32 | 77.62 | 207.32 |
| First segment | 108.76 | 87.04 | 322.20 | 78.41 | 322.20 |
| **Total TTFF** | **292.93** | **251.52** | **884.54** | **242.23** | **884.54** |

*Note: values in milliseconds, n = 20 samples, measured against a video served directly from the S3 bucket, before the CloudFront distribution described in Section 5.5 was deployed. These figures therefore represent origin latency without any CDN, and they serve here as the baseline against which Section 6.3.1 compares the deployed system. The mean (292.93 ms) exceeds the median (251.52 ms) because one outlier sample (884.54 ms) inflates both the mean and the P95/max columns, which coincide with the*

*single-sample maximum at this sample size.*

Table B.2 gives the same statistics for the measurement through CloudFront after the price class correction, which Figure 6.7 compares with the baseline.

Table B.2: Time-to-First-Frame through CloudFront after the price class correction

| STAGE | MEAN | MEDIAN | P95 | MIN | MAX |
|---|---|---|---|---|---|
| Master playlist | 28.65 | 8.37 | 263.43 | 6.54 | 263.43 |
| Rendition playlist | 29.29 | 7.93 | 348.78 | 5.89 | 348.78 |
| First segment | 112.75 | 87.36 | 487.31 | 68.87 | 487.31 |
| **Total TTFF** | **170.69** | **110.32** | **1099.51** | **83.17** | **1099.51** |
| *Warm cache only* ($n = 18$) | *108.49* | *107.57* | *159.25* | *83.17* | *159.25* |

*Note: values in milliseconds, $n = 20$ samples with Signed Cookies attached. Two samples were edge cache misses and eighteen were hits; the final row reports only the samples that hit at all three stages, which is the steady state a viewer of an already-watched video experiences. The P95 and maximum of the full sample coincide with the colder of the two misses, as at this sample size the 95th percentile is the single slowest observation.*

Table B.3 adds, to the medians of Figure 6.8, the edge location that served each client and the median over the samples that hit the cache.

Table B.3: Time-to-First-Frame by client location, before and after `PriceClass_All`

| | PRICECLASS_200 | | PRICECLASS_ALL | | |
|---|---|---|---|---|---|
| **CLIENT LOCATION** | **EDGE** | **MEDIAN** | **EDGE** | **MEDIAN** | **WARM** |
| N. Virginia, United States | IAD61 | 55.23 | n/a | n/a | n/a |
| Dublin, Ireland | DUB2 | 55.91 | DUB2 | 55.68 | 55.68 |
| Singapore | SIN3 | 56.89 | SIN3 | 53.20 | 53.20 |
| Tokyo, Japan | NRT12 | 59.68 | n/a | n/a | n/a |
| Sydney, Australia | n/a | n/a | SYD3 | 52.30 | 43.36 |
| São Paulo, Brazil | CPT51 | **1196.10** | GRU1 | **36.79** | **36.49** |
| Ho Chi Minh City (consumer) | SGN50 | 110.32 | n/a | n/a | n/a |

*Note: values in milliseconds, $n = 20$ per location and per configuration. WARM reports the median over samples that hit the edge cache at all three stages. Entries marked n/a were not measured in that configuration: the first run predated the Sydney probe, and the second re-measured only the two locations that could change plus two controls. The Ho Chi Minh City row is the local measurement of Table B.2, taken from a consumer connection rather than from inside an AWS region, and is included for comparison rather than as a like-for-like sample.*

## B.2 Playback Quality

Table B.4 gives all five measures for each of the nine combinations of source and network profile, of which Figure 6.9 charts two.

Table B.4: Playback quality across three sources of differing visual complexity

| METRIC | LOW | MEDIUM | HIGH |
|---|---|---|---|
| *Unthrottled* | | | |
| Rebuffering ratio, mean | 0.00% | 0.00% | 0.00% |
| Rebuffering ratio, max | 0.00% | 0.00% | 0.00% |
| Runs exhibiting a stall | 0/5 | 0/5 | 0/5 |
| Startup delay, median (s) | 1.46 | 1.34 | 1.21 |
| Average bitrate (kbit/s) | 1644 | 1830 | 1664 |
| *Fast 3G* | | | |
| Rebuffering ratio, mean | 0.22% | 2.30% | 0.11% |
| Rebuffering ratio, max | 0.60% | 5.81% | 0.55% |
| Runs exhibiting a stall | 2/5 | 2/5 | 1/5 |
| Startup delay, median (s) | 1.22 | 1.15 | 1.12 |
| Average bitrate (kbit/s) | 1477 | 1316 | 1246 |
| *Slow 3G* | | | |
| Rebuffering ratio, mean | 4.91% | 5.80% | 4.84% |
| Rebuffering ratio, max | 13.14% | 13.73% | 13.37% |
| Runs exhibiting a stall | 3/5 | 3/5 | 3/5 |
| Startup delay, median (s) | 3.76 | 1.87 | 3.84 |
| Average bitrate (kbit/s) | 1070 | 1224 | 845 |

*Note: five recorded runs per cell after two discarded warm-up runs, 120 s of playback each, at a device pixel ratio of one. Source durations are 4:23, 4:23, and 4:40, all longer than the measurement window.*

## B.3 Transcoding Latency and Capacity

Table B.5 lists the ten runs of the 25-minute video with the columns that Figure 6.10 does not show: capacity, slots and the length of the chunk phase.

Table B.5: A 25-minute video on the chunked path, by chunk configuration and capacity

| N × VCPU | FARGATE | VCPU | SLOTS | PHASE (MIN) | READY (MIN) | VCPU-S |
|---|---|---|---|---|---|---|
| 5 × 1 | Spot | 8 | 8 | n/a | 30.1 | n/a |
| 5 × 1† | Spot | 8 | 8 | 32.6 | 36.3 | 7 117 |
| 23 × 1 | Spot | 8 | 8 | 19.2 | 23.6 | 7 270 |
| 12 × 2 | Spot | 8 | 4 | 16.3 | 20.1 | 6 816 |
| 6 × 4 | Spot | 8 | 2 | 16.8 | 20.4 | 6 792 |
| 6 × 4 | Spot | 8 | 2 | 14.4 | 18.0 | 6 363 |
| 6 × 4 | On-Demand | 8 | 2 | 21.7 | 26.0 | 10 182 |
| 6 × 4 | On-Demand | 8 | 2 | 18.2 | 22.5 | 7 852 |
| 12 × 4 | Spot + OD | 16 | 4 | 11.5 | 15.3 | 8 827 |
| 12 × 4 | Spot + OD | 16 | 4 | 10.2 | 14.7 | 8 159 |

*Note: the first four rows were timed from the creation of the first job and the later rows from the end of the upload, which differ by about half a minute. The vCPU-seconds of the first five rows count chunk jobs only; the later rows count every job of the video. Rows are in chronological order of measurement. The first column gives the number of chunks and the vCPU of each; † marks the run on the production environment. PHASE is the time from the first chunk start to the last chunk end, SLOTS the number of chunks encoded at once, VCPU-S the vCPU-seconds, and OD stands for On-Demand.*

Table B.6 gives the minutes of each step of the four-hour video, including the steps too short to be labelled in Figure 6.11, and the compute used.

Table B.6: A four-hour video at two capacities

| STEP (MINUTES) | 16 VCPU | 8 VCPU |
|---|---|---|
| Planner (Lambda submit to child jobs) | 0.4 | 0.4 |
| Audio 64 kbit/s and 128 kbit/s (in parallel) | 9.6 | 4.7 |
| 48 chunk jobs, 4 vCPU each | 71.8 | 125.9 |
| Finalizer (playlists, thumbnail, moderation, READY) | 2.3 | 3.2 |
| **Upload complete to READY** | **85.3** | **135.3** |
| Compute (vCPU-hours) | 17.3 | 15.1 |

Table B.7 gives, for each of the four videos, the start and end of the chunk phase that Figure 6.12 draws.

Table B.7: Four 25-minute videos submitted together, by capacity

| VCPU | ORDER | START (MIN) | END (MIN) | READY (MIN) |
|---|---|---|---|---|
| 8 | 1 | 2.8 | 19.7 | 21.0 |
| 8 | 2 | 18.4 | 37.1 | 38.7 |
| 8 | 3 | 35.5 | 58.5 | 62.9 |
| 8 | 4 | 52.2 | 71.9 | 73.3 |
| 16 | 1 | 3.0 | 16.0 | 17.7 |
| 16 | 2 | 2.7 | 24.6 | 25.7 |
| 16 | 3 | 22.2 | 35.0 | 36.1 |
| 16 | 4 | 32.0 | 43.3 | 44.3 |

*Note: in the 8 vCPU rows the four videos were uploaded together over one connection and timed from the first job creation. In the 16 vCPU rows the arrival was produced by server-side copies of one uploaded file, so all four events reached the pipeline within a second. START and END are the first chunk start and the last chunk end, and ORDER is the order of completion.*